



# PL-L Long 4-Pin Base

## PL-L 36W/835/4P

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

### Product data


General Information		Controls and Dimming	
Cap-Base	2G11 [ 2G11]	Dimmable	Yes
Life to 50% Failures (Nom)	15000 h	<b>Mechanical and Housing</b>	
Life to 50% Failures Preheat (Nom)	20000 h	Bulb Finish	Silicon
<b>Light Technical</b>		Cap-Base Information	4P
Color Code	835 [ CCT of 3500K]	<b>Product Data</b>	
Initial lumen (Nom)	2900 lm	Order product name	PL-L 36W/835/4P
Color Designation	White (WH)	EAN/UPC - Product	046677349424
Lumen Maintenance 10000 h (Nom)	92 %	Order code	349423
Lumen Maintenance 2000 h (Nom)	94 %	Numerator - Quantity Per Pack	1
Lumen Maintenance 5000 h (Nom)	93 %	Numerator - Packs per outer box	25
Correlated Color Temperature (Nom)	3500 K	Material Nr. (12NC)	927904583521
Luminous Efficacy (rated) (Nom)	80 lm/W	Net Weight (Piece)	104.000 g
Color Rendering Index (Nom)	82	ILCOS Code	FSD-36/35/1B-E-2G11
<b>Operating and Electrical</b>			
Power (Rated) (Nom)	36.0 W		
Lamp Current (Nom)	0.435 A		
Voltage (Nom)	106 V		

# PL-L Long 4-Pin Base

## Warnings and Safety

- Lamp contains mercury. Manage in Accord with Disposal Laws. See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050


## Dimensional drawing




Product	D (max)	D1 (max)	C (max)
PL-L 36W/835/4P	39.0 mm	18.0 mm	416.6 mm

PL-L 36W/835/4P Silicon

## Photometric data

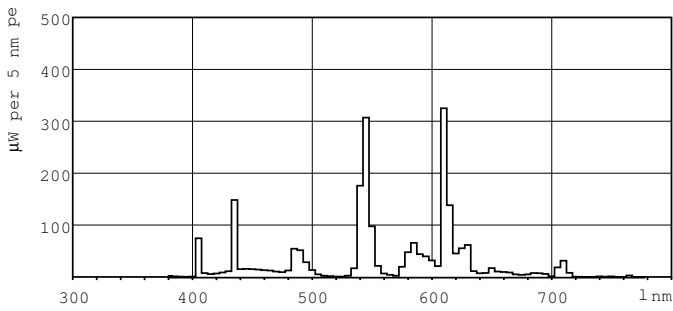

Lightcolor /835

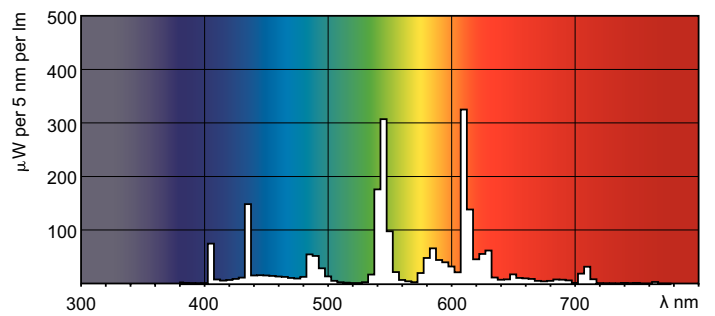

Lightcolor /835

