



► Model PMMFL and PMMST

Panel Mount Multicolor LED Beacon

Models PMMFL and PMMST were developed with a multichannel technology, that allows three different colors (amber, green and red) controllable via independent electric contacts. Model PMMFL produces a flashing light effect, while model PMMST has a steady light effect.

These models offer a self-extinguishing PC body that protects against vibrations, dust and atmospheric elements. The device can be panel mounted through a 1.18" hole and secured with the provided locking ring.


FEATURES

- Available in 12-24VAC/DC or 48-240VAC
- Multicolor LED produces Amber, Green and Red
- Available in flashing (PMMFL) or steady (PMMST)
- 50,000 hour LED
- Opaque dome
- Type 4X, IP66 enclosure
- CE Certified and RoHS Compliant
- UL and cUL listed

MODEL	VOLTAGE	FLASH RATE/MINUTE
PMMFL-012-024	12-24VAC/DC	150
PMMFL-048-240	48-240VAC	150
PMMST-012-024	12-24VAC/DC	N/A Steady
PMMST-048-240	48-240VAC	N/A Steady

MAXIMUM OPERATING CURRENT (mA)					
12VDC	24VDC	12VAC	24VAC	48VAC	240VAC
50	40	110	115	40	20

Panel Mount Multicolor LED Beacon (PMMFL/PMMST)

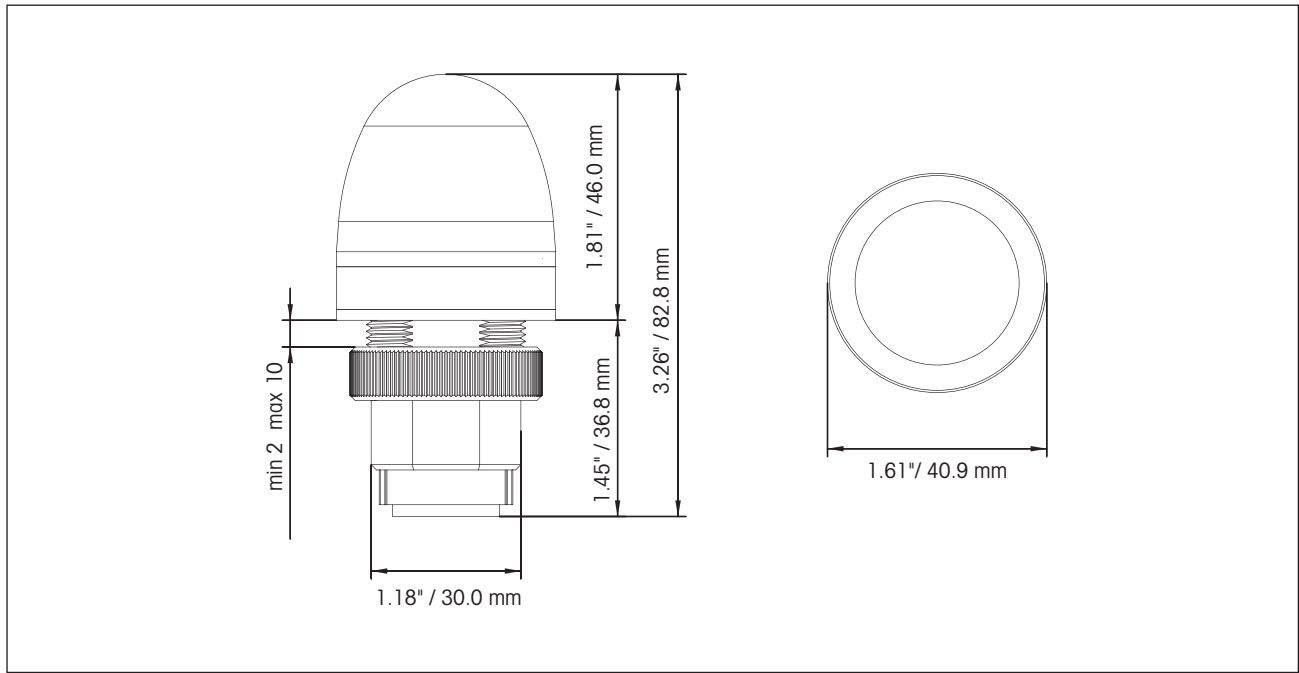

SPECIFICATIONS

Lamp Life:	50,000 Hours
Light Source:	LED
Operating Temperature:	-22°F to 140°F -30°C to 60°C
Net Weight	1.44 oz 0.04 kg

HOW TO ORDER

