

6

5

4

3

2

1

E

E

D

D

C

C

B

B

A


A

STAINLESS STEEL SUPPORT RINGS

F3 MAX-LOC NUT

STAINLESS STEEL SCREWS

SHROUDED KNOCK-OUT HOLE FOR OPTIONAL PILOT LIGHT OR HORN BUTTON

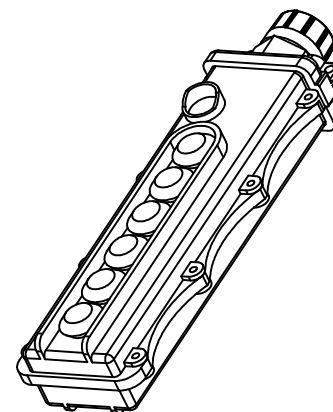

12.12 [307.8] REF.

1.18 [30.0] REF. BETWEEN CENTERS

3.52 [89.4] REF.

2.31 [58.7] REF.

ORDER NO.	WOODHEAD NO.	SPEED SWITCHES
1301260257	5056-1M*	1
1301260260	5056-2M*	2
-----	5056-3M*	3
1301260256	5056-1	1
1301260259	5056-2	2
-----	5056-3	3
1301260258	5056-1N*	1
1301260261	5056-2N*	2
-----	5056-3N*	3

\*M = WITH MOMENTARY ON/OFF SWITCHES  
N = WITH MAINTAINED ON/OFF SWITCHES

NOTES:

- PENDANT HOUSING: POLYCARBONATE
- COMMON CIRCUIT IS PRE-WIRED ON ALL SWITCHES TO SIMPLIFY WIRING
- EASILY REMOVABLE BUTTON HOODS AND NAMEPLATES
- CORD DIAMETER: .375 TO .812 [9.53 TO 20.63]
- UL FILE NO.: E70531
- INSTALLATION INSTRUCTIONS, BUTTON ID, AND LABELS ARE PACKED WITH PART
- ALL BUTTONS ARE HIGH AMBIENT, CHEMICALLY RESISTANT MATERIAL

RELEASE SALES DRAWING EC NO: IPC2016-0371 DRWN: KCOX01 2015/09/04 CHKD: HKNEELAN 2015/09/04 APPR: JFMURPHY 2015/09/29	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		4 PLACES	mm ±---	INCH ±---	DRAWN BY DATE KCOX01 2015/09/04	TITLE <b>6 POSITION WATERTITE PLASTIC PENDANT STATION</b>				
		3 PLACES	mm ±---	INCH ±.005	CHECKED BY DATE HKNEELAN 2015/09/04					
		2 PLACES	mm ±.13	INCH ±.010	APPROVED BY DATE JFMURPHY 2015/09/29		<b>MOLEX INCORPORATED</b>		MATERIAL NO. SHEET NO. SEE TABLE SD-130126-071 1 OF 1	
A	REV	ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

6

5

4

3

2

1