




Transformer Specifications	
PRIMARY VOLTAGE(S)	230x460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	115
RATED VA	250
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	9.3 LBS

TEST REQUIREMENTS				
WINNING	H4-H3	H2-H1	X2-X1	
DC VOLTS	240	240	129.2	
LOAD VOLTS	240	240	120	
F.L. AMPS	0.641	0.641	2.083	
HI- POT	3000V		1800V	
EXCITING AMPS	0.44AMPS @ 240 VOLTS, 50HZ			
EXCITING WATTS	196			

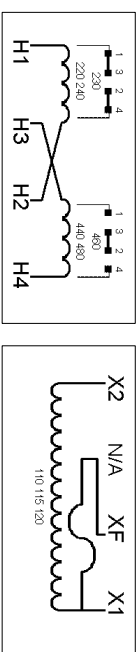

NOTE:  
1. ALL MEASUREMENTS IN INCHES (MM)

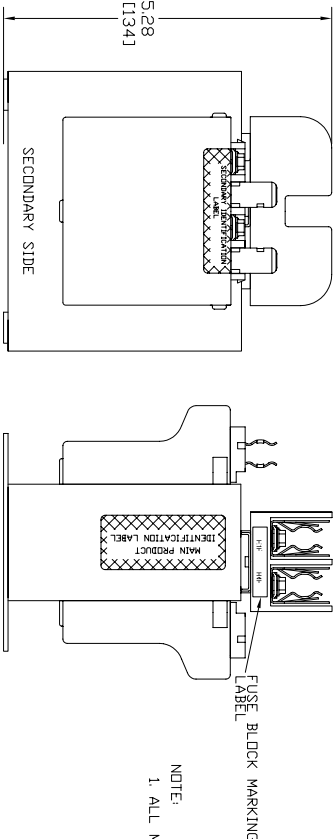

**Culler-Hormer** INDUSTRIAL  
CONTROL  
TRANSFORMER  
250VA 50/60Hz  
TEMP CL. 130°C  
CAT. C0250E2AFB  
SERIES 2  
35062

MAIN PRODUCT IDENTIFICATION LABEL

**Eaton**

WANT TO PREPARE REGARDING THE DOCUMENT AND/OR TECHNICAL INFORMATION. THIS DOCUMENT IS NOT FOR THE PUBLIC AND INFORMATION CONTAINED THEREIN IS CONFIDENTIAL AND IS THE EXCLUSIVE PROPERTY OF EATON CORPORATION, AND IS NOT TO BE LOANED OR SUBJECT TO RECALL BY EATON IN ANY MANNER. YOU AGREE THAT THE DOCUMENT MAY BE USED ONLY FOR THE PURPOSES OF THE PROJECT AND MAY NOT BE REPRODUCED OR OTHERWISE REPRODUCED WITHOUT THE PRIOR WRITTEN CONSENT OF EATON. IN THE CASE OF CONFLICTING CIRCUMSTANCES, THIS NOTICE SHALL OVERTHROW THE STATUS OF THIS DOCUMENT.

# 20

REVISION  
DT1109

EAD\_ACAD\_FRMB1  
REV. 05/03/08

© 2008 Eaton Corporation, All Rights Reserved