


M-8893 2

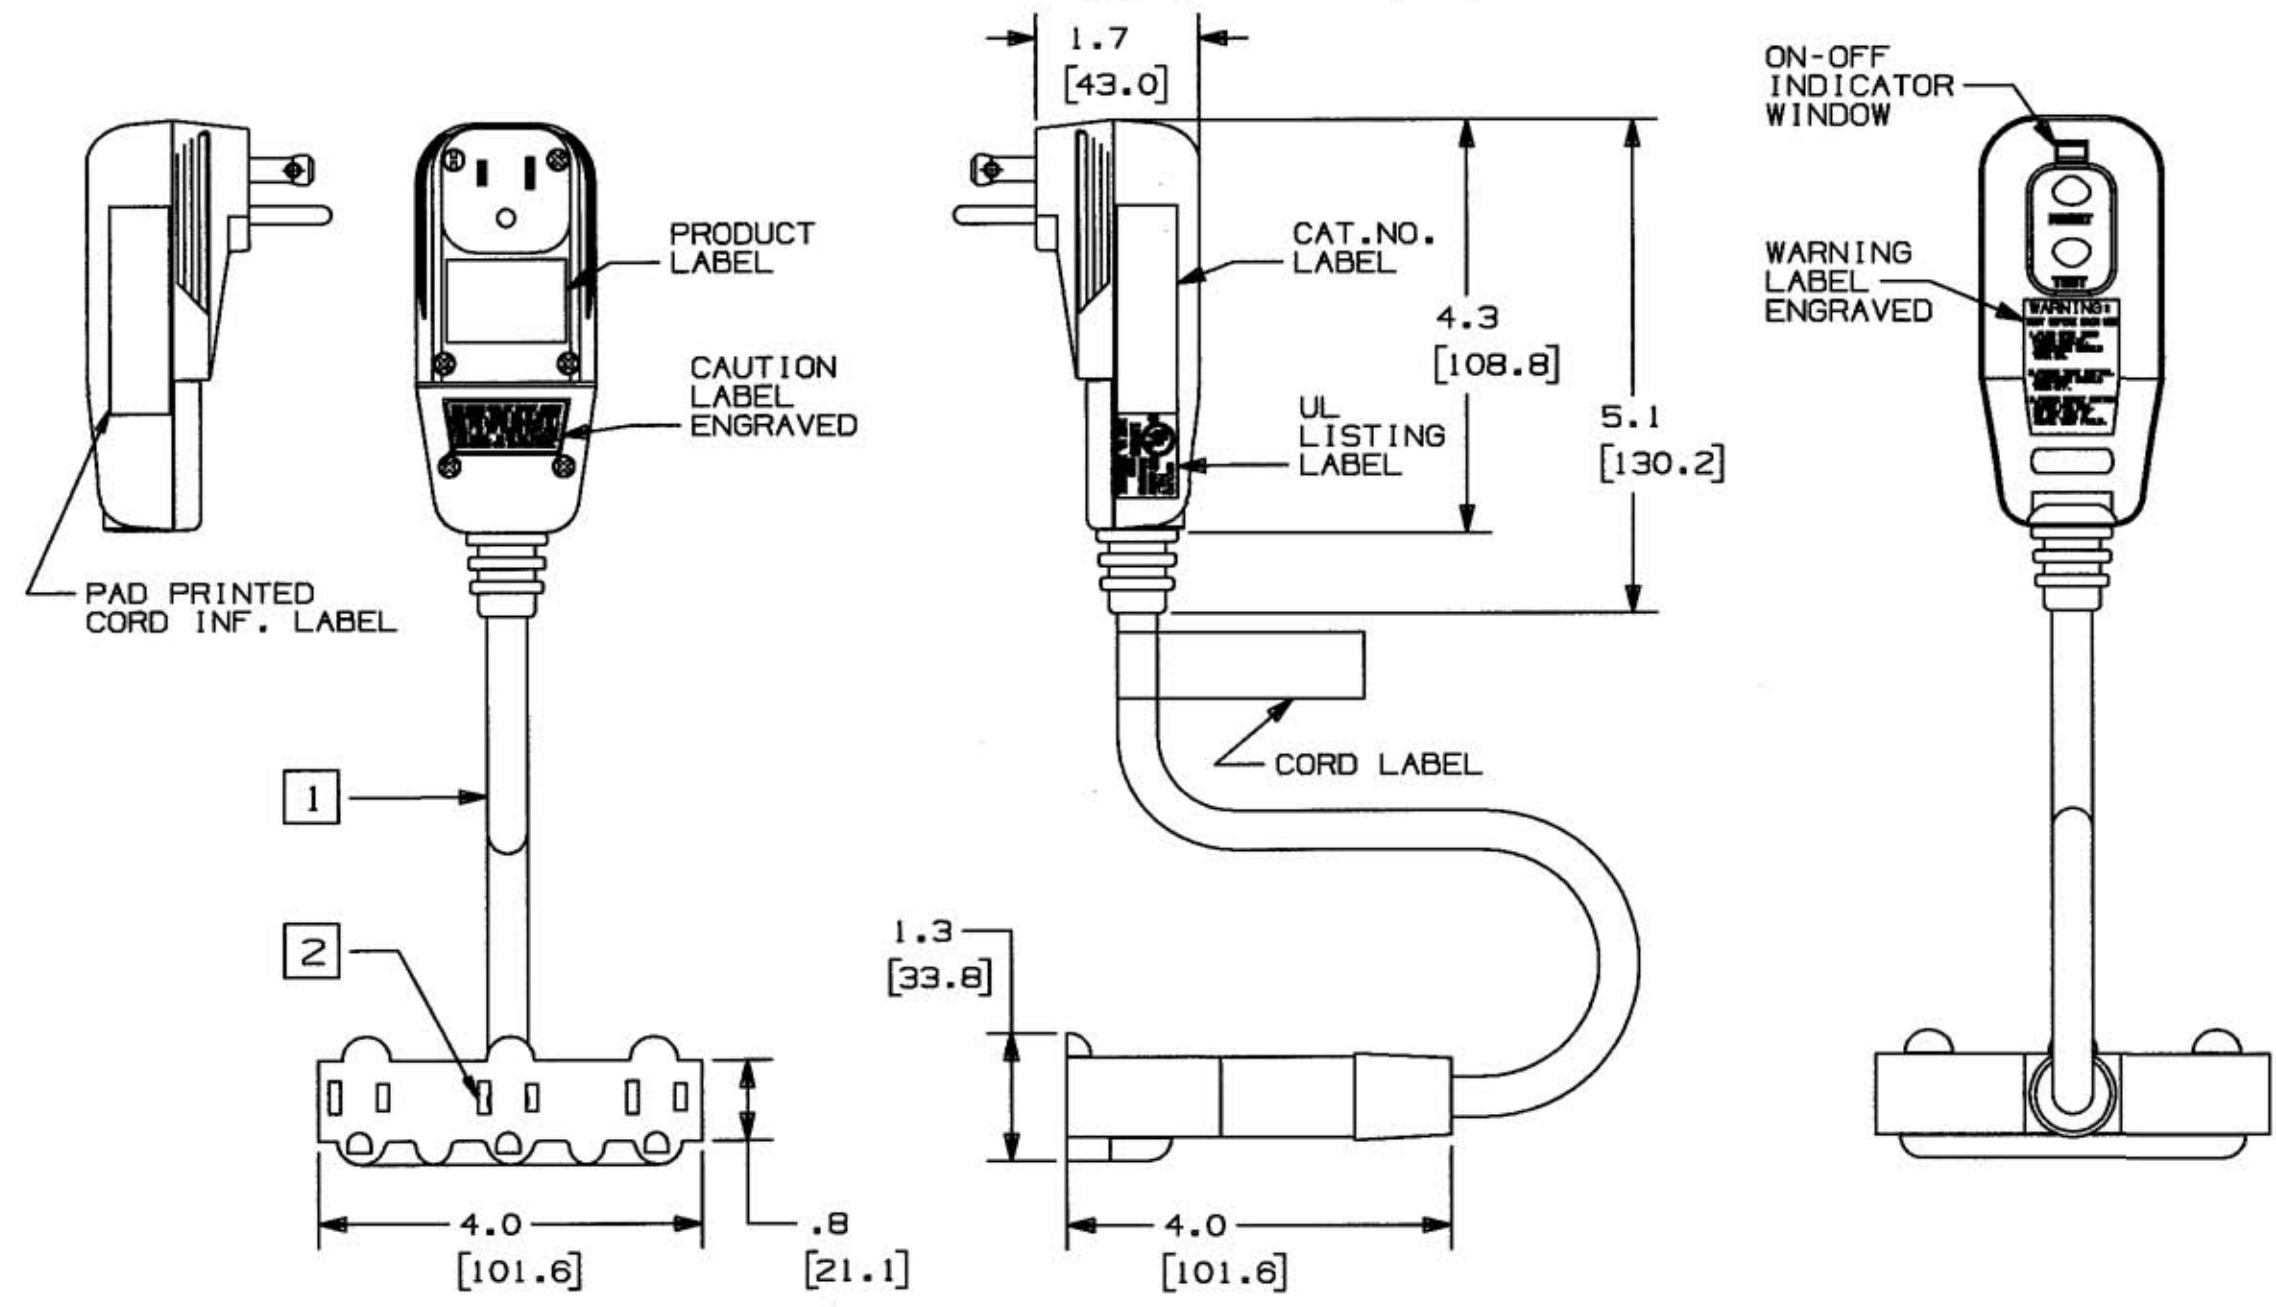

NOTE:

- 1 CABLE (YELLOW) 12/3 AWG 300V MIN. 105°C DRY 60°C WATER RESISTANT TYPE SJEOW, UL LISTED FOR U.S. AND EITHER CUL LISTED OR CSA CERTIFIED FOR CANADA. CORD TO BE COILED AND TIED WITH 8" I.D.
- 2 NEMA 5-15R TRI-TAP MOLDED CONNECTOR (BLACK)

CAT. NO.	RESET TYPE	VOLTAGE	AMP	WATTS	Hz	CORD (FT) LENGTH
GFP2TTM	MANUAL	120V	15	1800	60	2
GFP2TTA	AUTOMATIC	120V	15	1800	60	2
GFP25TTM	MANUAL	120V	15	1800	60	25
GFP25TTA	AUTOMATIC	120V	15	1800	60	25

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
GFCI BODY	POLYCARB.	BLACK
GFCI BLADES	BRASS	NONE
RESET BUTTON	POLYCARB.	GREEN
TEST BUTTON	POLYCARB.	BLUE
STRAIN RELIEF	ELASTOMER	BLACK
SCREWS	STEEL	TIN-ZINC
CORD GRIP	POLYCARB.	BLACK
CORD	PVC	YELLOW
RECEPTACLE	PVC	BLACK

REV	DESCRIPTION	APP	DATE
2	4/7/04 REVISED VIEWS & CALLOUTS TO AGREE WITH NEW DESIGN; ADDED NOTES 1 & 2 PER DCN 11630 RCM	SL & X	4/7/04
1	8.2.02 INITIAL RELEASE PER DCN 10077 SM	S.M.	8.23.02

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE GFCI 15A-PLUG THREE TAP PLUG WITH CORD SET. CUSTOMER DWG.

TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 2°	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
	DR. BY S.M.	APP. BY SM
	TR. BY	SCALE NONE
	CHK'D BY SM	DATE 7.28.02