

Rittal – The System.

Faster – better – everywhere.

▶ 3-part EL NEMA 12 enclosure with punched rails – TS 9969.582

Date : May 24, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



3-part EL NEMA 12 enclosure with punched rails – TS 9969.582

created: 24.05.2018 build on www.rittal.com/us-en

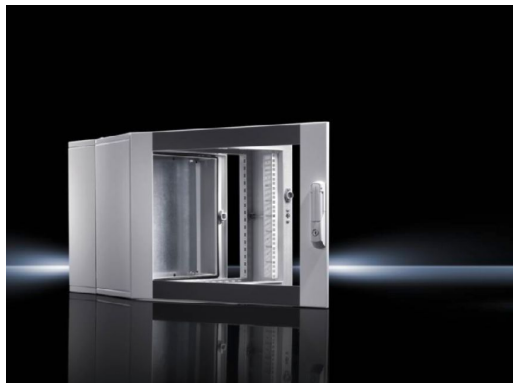

Product description

Description: All standard models feature usable panel heights from 12U to 21U and ensure safe packaging for sensitive components as well as protection from the environment and from unauthorized access.

Material: Wall and hinged part: carbon steel, 16 ga (15 mm)
Viewing window: Single-pane safety glass, 3 mm

Surface finish: Powder-coated

Color: Wall and hinged part: RAL 7035
Viewing door: RAL 7035/7015 (slate gray)

**Protection category
IP to IEC 60 529:** NEMA 12

Supply includes: Wall section
Hinged part with 25 mm hole pattern of holes in the front and rear frame
Designer viewing door
Security lock 3524 E
Comfort handle and 2-point lock for 18-21 U
Wall section: Flange (gland) plate, solid, top and bottom
Wall section: 2 vertical punched rails
Horizontal C rail for cable clamping
Hinged part: 19" (482.6 mm) mounting angles, fully dept adjustable
Wall mounting bracket, 10 mm (0.39 in.)

Product features

Dimensions: Height: 1016 mm (40 ")
Height units: 21 U (21 U)
Width: 600 mm (24 ")

Depth: 600 mm (24 ")

Depth hinged part:	445 mm (18 ")
Installation depth:	530 mm (21 ")
Clearances:	Clearance height: 949 mm (37 ") Clearance width: 502 mm (20 ")
Wall section:	Depth: 135 mm (5.3 ")
Load capacity:	Hinged part, static (max.): 75 kg (165.3 lb.)
Packaging unit:	1 pc(s).
Weight/packaging unit:	72.12 kg (159 lb.)
EAN:	38263