

Catalog Number: U5971-XL-200

Item Description: 200A OU UNMTR P/O W/200A

784572629134

Brand Name: Milbank

Type: Unmetered

**Application:** Unmetered With Main And Load

**UPC Code:** 

Center

Standard: UL Listed

**Voltage Rating:** Up to 240 Volts Alternating Current

Amperage Rating: 200 Ampere Continuous

Phase: 1 Phase

Frequency Rating: 60 Hertz

Number Of Cutouts: 1

Cutout Size: 200 Ampere Main Breaker

Cable Entry: Overhead and Underground

Terminal: Lay in Line Side and Single Mechanical

Load Side

Mounting: Surface Mount

**Enclosure:** Type 3R, G90 Galvanized Steel with

Powder Coat Finish


Additional Specifications: Hub Opening and Closing Plates: Small Closing Plate


Bypass Provision: No Bypass


Number Positions: 1 Position




		FEATURE TABLE
ITEM	QTY	DESCRIPTION
Α	6	U/L MNTG.EMBOSS
В	1	14, 1/2 CONC. K.O.
С	3	½, ¾ CONC. K.O.
D	2	½, ¾, 1 CONC. K.O.
E	1	1, 1¼, 1½, 2 CONC. K.O.
F	2	1, 1¼, 1½, 2, 2½ CONC. K.O.
G	1	11/4, 11/2, 2, 21/2, 3 CONC. K.O.

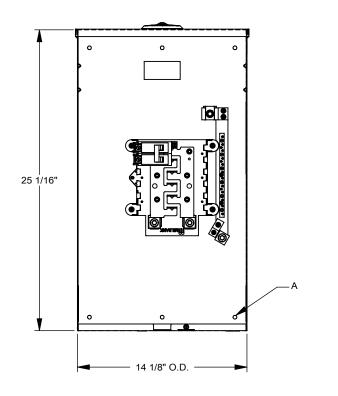

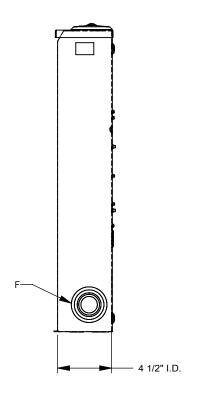

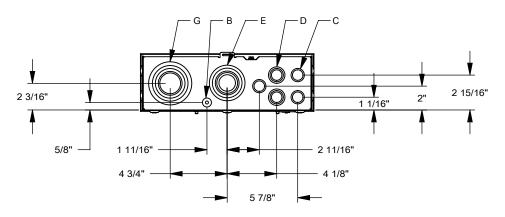

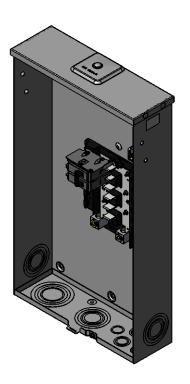



Version:

All dimensions are +/- 1/16". Drawing views are not to scale.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.