

---

 TECHNICAL DATA SHEET

# Cable Tie, push mount

## Natural and black

### Catamount<sup>®</sup>



Cable ties are primarily used to cinch wires and cables together to form a neat and organized bundle.

#### Certifications / Standards:




---

#### Feature:

- Push Mounting head

---

#### Materials and Finishes:

- Nylon 6.6 natural
- Nylon 6.6 UV resistant black

---

#### Ratings:

- Minimum operating temperature: -40°C (-40°F)
- Maximum operating temperature: 85°C (185°F)
- Minimum installing temperature: -20°C (-4°F)


---

#### Part number characteristic:

L-7-5-PM-0-C

C = 100 pack  
D = 1000 pack

0 = Nylon 6.6 UV resistant black  
9 = Nylon 6.6 natural

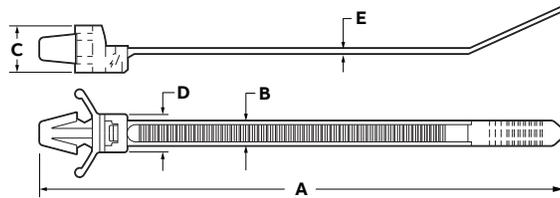


---

#### Product selection - inches (mm)

Part no: GID no:	Min. bundle diameter	Max bundle diameter	A ± 0.125 (3.0)	B ± 0.01 (0.25)	C ± 0.03 (0.76)	D ± 0.03 (0.76)	E ± 0.01 (0.25)	Tensile strength lbs. (N)
L-7-50PM-0-C 7TAG054710R0004	0.12 (3.0)	1.77 (45)	7.87 (200)	0.19 (4.8)	0.21 (5.3)	0.31 (8)	0.05 (1.3)	50 (222)
L-7-50PM-0-D 7TAG054700R0001								
L-7-50PM-9-C 7TAG054710R0005								
L-7-50PM-9-D 7TAG054700R0002								

Note: Product must be installed in accordance with applicable national and local electrical codes.