

**FULL LINE CATALOG**

**LOUISVILLE<sup>®</sup>**  
LADDERS TRUSTED BY THE PROS FOR OVER 65 YEARS



[WWW.LOUISVILLELADDER.COM](http://WWW.LOUISVILLELADDER.COM)

# TABLE OF CONTENTS

LADDER	MODEL	TYPE	PAGE
--------	-------	------	------

## STEPLADDERS

FIBERGLASS			
• Rhino™ 375 Stepladder	FS1100HD	IAA	10
• Stepladder	FS1300HD	IAA	10
• Brute™ 375 Stepladder	FS1400HD	IAA	11
• Stepladder	FS1500	IA	12
• Stepladder	L-3016	IA	12
• Stepladder	FS2000	I	13
• Stepladder	FS4000	II	13
ALUMINUM			
• Stepladder	AS1100HD	IAA	27
• Stepladder	AS1000	IA	27
• Stepladder	AS3000	IA	28
• Stepladder	AS2100	I	28
• Stepladder	AS4000	II	29

## TWIN FRONT LADDERS

FIBERGLASS			
• Rhino™ 375 Twin Front Ladder	FM1100HD	IAA	14
• Brute™ 375 Twin Front Ladder	FM1400HD	IAA	14
• <b>NEW Twin Front Ladder</b>	<b>L-3431-MR</b>	<b>IAA</b>	<b>15</b>
• Twin Front Ladder	FM1500	IA	15
• Twin Front Ladder	FM2000	I	16
ALUMINUM			
• Twin Front Ladder	AM1100HD	IAA	29
• <b>NEW Twin Front MRI Ladder</b>	<b>L-2431-MR</b>	<b>IAA</b>	<b>30</b>
• Twin Front Ladder	AM1000	IA	30

## PLATFORM LADDERS

FIBERGLASS			
• Rhino™ 375 Platform Ladder	FP1100HD	IAA	16
• Brute™ 375 Platform Ladder	FP1400HD	IAA	17
• Platform Ladder	FP1500	IA	17
• <b>NEW Twin Front Platform Ladder</b>	<b>FMP1500</b>	<b>IAA</b>	<b>18</b>
ALUMINUM			
• Rhino™ 375 Platform Ladder	AP1100HD	IAA	31
• Platform Ladder	AP1000	IA	31
• Mobile Platform Ladder	AP5000	IA	32
• <b>NEW Twin Front Platform Ladder</b>	<b>AMP1000</b>	<b>IA</b>	<b>32</b>

## SPECIALTY LADDERS

FIBERGLASS			
• Step-To-Straight	FC1200	IAA	18
• Tripod Ladder	FT1000	IA	19
• Ultimate Articulated Ladder	L-3092	IA	19
• Extension Trestle	FX1100	IA	21
• Shelf Ladder	FH1000	IA	22
• Manhole Ladder	FE8800	IA	22
ALUMINUM			
• Sawhorse Ladder	L-2032	IA	33
• Ultimate Articulated Ladder	L-2090	IA	33
• Aircraft Mechanic Ladder	AM8000	IA	35
• Extension Trestle	AX1000	IA	35
• Shelf Ladder	AH1000	IA	36
• Multi Purpose Ladder	L-2094	IA	36

## STEP STOOLS

FIBERGLASS			
• <b>NEW Twin Front Step Stool</b>	<b>L-3433</b>	<b>IAA</b>	<b>20</b>
• Step Stand	FY8000	IA	20
ALUMINUM			
• <b>NEW Twin Front Step Stool</b>	<b>L-2433</b>	<b>IAA</b>	<b>34</b>

## STEP STOOLS (CONT.)

LADDER	MODEL	TYPE	PAGE
• Step Stand	AY8000	IA	34
• Euro Platform Ladder	L-2346	III	43
• Platform Ladder	AP8000	III	43
STEEL			
• Qwik Step® Step Stool	L-4362	III	44
• Qwik Step® Step Stool	L-4340	III	44

## EXTENSION LADDERS

FIBERGLASS			
• Rhino™ 375 Extension Ladder	FE4000HD	IAA	23
• Extension Ladder	FE3200	IA	24
• Extension Ladder	L-3022-PT (ProTop™)	IA	24
• Plate Connect Extension & Single	FE7000	IA	25
• Extension Ladder	FE1700	I	26
• Extension Ladder	FE0600	II	26
ALUMINUM			
• Rhino™ 375 Extension Ladder	AE1200HD	IAA	38
• Stacked Extension Ladder	AE2800	IA	38
• Extension Ladder	AE2000	IA	39
• Extension Ladder – 3 Section	AE1660	I	40
• Extension Ladder	AE3200	I	40
• Extension Ladder	AE4000	II	41
• Extension Ladder	L-2324	III	42
• Extension Ladder	L-2321	III	42

## ATTIC LADDERS

ALUMINUM			
• Elite Series	-	350 lbs.	45
• Everest Series	-	350 lbs.	45
WOOD			
• Big Boy Series	-	350 lbs.	46
• Champion Series	-	300 lbs.	46
• Premium Series	-	250 lbs.	47

## WORK & WAREHOUSE PLATFORMS

FIBERGLASS			
• Mini Working Platform	L-3041	IA	21
• Mobile Maintenance Platform	FW SERIES	IA	47
ALUMINUM			
• Mini Working Platform	L-2241	II	37
STEEL			
• Rolling Warehouse Ladders	GSW SERIES	450 lbs.	48
• HD Rolling Warehouse Ladders	GSX2400 SERIES	450 lbs.	49
• HD Rolling Warehouse Ladders	GSX1600 SERIES	450 lbs.	49
• Rolling Tower Scaffolds	ST SERIES	1,000 lbs.	50
• Mini Fortruss® Mobile Work Stand	SM SERIES	500 lbs.	51

## PLANKS

• Scaf-A-Deck	PD9000 SERIES	-	52
• Scaf-A-Deck	PD8000 SERIES	-	52
• Telescoping Plank	LP-2921	-	52
• Scaffold Planks & Stages	P1 / P2 / P3	-	52-53
• Modular Guardrail Systems	-	-	54

## OTHER

Louisville Ladder History	-	-	3
Ladder Safety Standards	-	-	4-5
When To Use...	-	-	6-7
Ladder Features	-	-	8-9
Merchandise - SRA9 Ladder Display Rack	-	-	55
LogoLock™ System	-	-	55
Extension Ladder Accessories	-	-	56-57
<b>NEW C.L.I.M.B. Academy® Program</b>	-	-	<b>58</b>
Warehouse Locations	-	-	59

# THE INDUSTRY'S LEADER IN PRODUCT INNOVATION

Founded in 1946, Louisville Ladder, Inc. is one of the largest manufacturers of ladders in North America. The company's headquarters is located in Louisville, KY, and it has a network of warehouses in various cities throughout the United States and Canada. Since its beginning, Louisville Ladder has been an industry leader in product innovation.

- Louisville Ladder created the first aluminum step and extension ladder.
- Revolutionary aluminum step and extension ladder construction, with steps using a channel that had the steps riveted directly to the rail flange; and with extensions using a patented rung-to-rail connection.
- Knocked-down steel rolling warehouse ladder.
- First line of fiberglass ladders, including an extension ladder using the patented rung-to-rail connection with aluminum washers on both sides of the rail.
- First structural foam-molded stepladder top.
- First powder-coat paint on the steel product line.
- Patented steel rolling tower that could be set up by one person.
- Patented QuickLatch® on runglocks (Patent #5429207).
- The only fiberglass mobile work platform.
- Full Metal Boot™ wrap-around shoe assembly for stepladders.
- Rhino™ 375 Series, the first ladder with a 375 lb. weight capacity.
- Da Boot™ is a polypropylene copolymer upper boot that provides strength, durability and fiberglass rail surface protection (Patent #7,000,731 B2).
- ProTops™ are multifunctional tops on extension ladders (Patent #7,753,170) and stepladders (Patent #D597,685 & patents pending) designed with innovative features to improve the user's performance when working electrical, utility, heavy construction and residential jobs.
- Fiberglass Mini Working Platform, a 3' lightweight non-conductive, all-around performance platform.
- ProGrip™ is an integrated slip-resistant ladder cap that protects the support surface from damage while including easy-carry hand grips.
- SHOX™ are a side rail impact absorption system that reduces damage to the first step, thus prolonging the life of the ladder.



[WWW.LOUISVILLELADDER.COM](http://WWW.LOUISVILLELADDER.COM)

# LADDER SAFETY STANDARDS

## WE MAKE SAFE LADDERS...

All Louisville Ladder products have been designed and built to meet or exceed the applicable standards and requirements of the American National Standards Institute (ANSI), Occupational Safety and Health Administration (OSHA), and Canadian Standards Association (CSA).



## OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION

The adequacy of ladders and the work practices followed by employees using them are regulated by OSHA in five sections: Portable Wood (1910.25), Portable Metal (1910.26), Fixed Ladders (1910.27), Mobile Ladder Stands and Scaffolds (1910.29) and ladders used in Construction Industry (1926.1053). These sections specify the standards to which all portable ladders must be manufactured, care and placement of ladders in the workplace, and the safe use of ladders on the job.

OSHA sets minimum national requirements with respect to the use of ladders in business and industry. However, many states have enacted their own regulations under the Occupational Safety & Health Act that establish more severe requirements. The more demanding state codes will supersede OSHA standards within their respective states. Therefore, users should check with their own state OSHA representatives.



## AMERICAN NATIONAL STANDARDS INSTITUTE

Louisville Ladder, Inc. manufactures products in compliance with the applicable safety codes of the American National Standards Institute (ANSI).

There are a variety of ANSI safety codes depending on material and type of ladder. The applicable ANSI codes are as follows:

WOOD LADDER: ANSI A14.1	STEEL LADDER: ANSI A14.7	ROLLING SCAFFOLD: ANSI A10.8	ATTIC LADDER: ANSI A14.9
FIBERGLASS LADDER: ANSI A14.5	PLANKS & STAGES: ANSI A10.8	METAL LADDER: ANSI A14.2	

In addition, ANSI codes have established a Duty Rating which identifies the use for which a portable ladder is intended and the conditions under which the ladder can be used safely. The following table describes the various types of ladders:

 TYPE IAA: Extra heavy duty industrial capable of supporting 375 lbs.	 TYPE IA: Extra heavy duty industrial capable of supporting 300 lbs.	 TYPE I: Heavy duty industrial capable of supporting 250 lbs.	 TYPE II: Medium duty commercial capable of supporting 225 lbs.	 TYPE III: Light duty household capable of supporting 200 lbs.
--	---	--	--	---

An extensive series of tests and design requirements determines which Duty Rating label a particular ladder may receive. The total load supported includes the combined weight of the user, clothing, tools and any materials on the ladder. However, ladders must be used properly in order to support the intended load.



## CANADIAN STANDARDS ASSOCIATION

Where applicable, product meets or exceeds Canadian Standards Association testing requirements.

## ...BUT YOU MAKE LADDERS SAFE.

Even a rigidly constructed ladder can be involved in an accident if the proper cautions are not taken in its use. Critical factors in safe use include reading all instructions and labels accompanying the ladder.



### DANGER

Metal ladders conduct electricity; do not use where contact may be made with live electrical circuits. Failure to read and follow instructions on the use of this product could result in serious personal injury or death.

### PROPER SELECTION

Select ladder of proper duty rating to support combined weight of user and materials. Ladders are available with duty ratings of 200, 225, 250, 300 and 375 lbs. Select ladder of proper length to safely reach desired height.

### INSPECTION BEFORE EACH USE

- Inspect thoroughly for missing or damaged components. Never use a damaged ladder and never make temporary repairs.
- Inspect thoroughly for loose fasteners. Make sure all working parts are in good working order (lubricate if necessary).
- Clean ladder of all foreign material (wet paint, mud, snow, grease, oil, etc).
- Destroy ladder if damaged, worn, or exposed to fire or chemicals.

### CONSIDER BEFORE EACH USE

- Metal ladders conduct electricity. Keep away from electrical circuits.
- Consult manufacturer for use in chemical or other corrosive environments.
- Use ladder only as outlined in instructions. Ladders are designed for one person only unless otherwise noted (i.e. twin front ladders). Do not overload.
- Do not use in high winds or during storm.
- Do not use if in poor health, if taking any drugs or alcoholic beverages, or if physically handicapped.
- Keep shoes clean. Leather soles should not be worn.
- Never leave ladder set up and unattended.
- Pay close attention to what you are doing.

### STEPLADDERS – PROPER SETUP AND USE

- Use help in setting up ladder, if possible.
- Make sure ladder is fully open and spreaders locked.
- Set all feet on firm, level surface. Do not place on unstable, loose or slippery surfaces. Place ladder where access is not obstructed. Do not place in front of unlocked doors. Ladders are not intended to be used on scaffolds.
- Secure ladder, where possible, from excessive movement

- Make sure spreaders are locked and ladder is stable before climbing.
- Climb only front side of ladder. Face ladder when climbing up or down. Maintain a firm grip. Use both hands in climbing.
- Keep body centered between side rails. Do not overreach. Get down and move ladder as needed.
- Do not climb, stand, or sit above second step from top. Do not climb, stand, or sit on spreader braces, ladder top, or pail shelf.
- Do not straddle front and back. Do not climb from one ladder onto another.
- Avoid pushing or pulling off to side of ladder. Do not "walk" or "shift" ladder while on it.

**FOR ADDITIONAL INFORMATION SEE ANSI A14.1-WOOD:**

**A14.2-ALUMINUM: A14.5-FIBERGLASS.**

*Twin front (mechanic) ladders and extension trestle ladders may be climbed from either side.*

**SINGLE & EXTENSION LADDERS – PROPER SETUP AND USE**


- Use help in setting up ladder, if possible.
- Set base of ladder on firm, level surface. Ladder leveling devices are available for use on uneven ground. Place ladder where access is not obstructed.
- Do not place on unstable, loose, or slippery surfaces. Do not place in front of unlocked doors. Ladders are not intended to be used on scaffolds.
- Secure base section before raising ladder to upright position. Do not raise or lower with fly section extended.
- Extend fly section and engage runglocks. Make sure rope does not create a tripping hazard or interfere with activity near ladder.
- Recommend tying bottom fly rung to adjacent base rung.
- Extend and retract fly section only from ground and when no one is on ladder.
- Do not overextend. A minimum overlap of sections is required as follows:
  - ladder size up to and including 32'-3' overlap

- over 32' up to and including 36'-4' overlap
- over 36' up to and including 48'-5' overlap
- sizes over 48'-6' overlap
- Position ladder against upper support surface. Make sure ladder does not lean to side. Ladder must make a 75 1/2° angle with the ground.
- To establish if ladder is at proper angle – Determine the distance along the rail between the top and bottom support points of the ladder. Divide this distance by 4. The result will be the horizontal distance between the top and bottom support points.
- When using ladder for access to roof, extend top 3 feet above roof edge. Tie or secure top from movement.
- Make sure top and bottom ends of ladder are firmly supported.
- Check that top and bottom of ladder are properly supported. Make sure runglocks are engaged before climbing.
- Face ladder when climbing up or down. Maintain a firm grip.
- Use both hands in climbing.
- Keep body centered between side rails. Do not overreach. Get down and move ladder as needed.
- Do not climb above top support point. Do not climb from one ladder to another.
- Do not straddle or sit on rungs.
- Avoid pushing or pulling off to side of ladder. Do not "walk" or "shift" ladder while on it.

**PROPER CARE AND STORAGE**

- Hang ladder on racks at intervals of 6' for support.
- Never store materials on ladder.
- Never drop or apply an impact load to ladder.
- Securely support ladder in transit.
- Never paint a wood ladder. Treat with wood preservative.
- Protect wood ladder from exposure to the elements, but allow good ventilation. Keep away from heat and moisture.

**USE THESE CHARTS TO DETERMINE THE RIGHT LADDER LENGTH FOR YOUR JOB:**

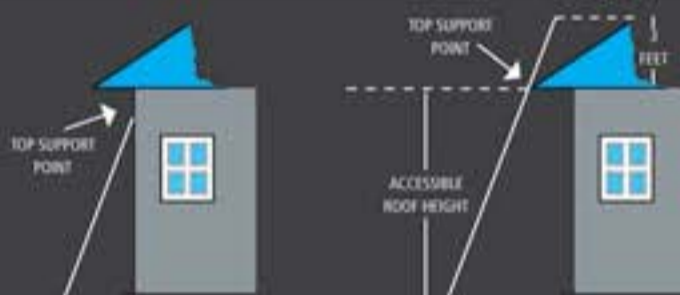

STEPLADDER HEIGHT SELECTION GUIDE	
STEPLADDER SIZE	APPROX. HIGHEST STANDING LEVEL
4'	1' 11"
5'	2' 10"
6'	3' 9"
7'	4' 9"
8'	5' 8"
10'	7' 7"
12'	9' 6"
14'	11' 5"
16'	13' 4"
18'	15' 3"
20'	17' 2"

EXTENSION LADDER LENGTH SELECTION GUIDE			
LADDER SIZE	MAXIMUM EXTENDED LENGTH	WORKING RANGE TO TOP SUPPORT*	MAXIMUM ACCESSIBLE ROOF HEIGHT RANGE*
16'	13'	7 1/2' – 12 1/2'	4 1/2' – 9 1/2'
20'	17'	9 1/2' – 16 1/2'	6 1/2' – 13 1/2'
24'	21'	11 1/2' – 20'	8 1/2' – 17'
28'	25'	13 1/2' – 24'	10 1/2' – 21'
32'	29'	15 1/2' – 28'	12 1/2' – 25'
36'	32'	17 1/2' – 31'	14' – 28'
40'	35'	19' – 33 1/2'	16' – 30 1/2'
44'	39'	21' – 37 1/2'	18' – 34 1/2'
48'	43'	23' – 41 1/2'	20' – 38 1/2'
60' <sup>(1)</sup>	48'	23' – 46 1/2'	20' – 43 1/2'

\*When set up at the proper 75 1/2° angle <sup>(1)</sup>Three-section extension

**WHAT MAKES LOUISVILLE LADDERS UNIQUE...**



Activated caster technology by Bodyweight™. 4 swivel casters, mounted on a front cam mechanism and rear springs, make it easy to use in material handling applications.



Rhino™ 375 Series – the first ladder with a 375 lb. duty rating. A Louisville Ladder exclusive!



These ladders have a 375 lb. duty rating, combining top of the line components for all demanding industrial applications.



Wraparound shoe assembly is an exclusive design by Louisville Ladder. For full description, see ladder features on pages 8-9.



Da Boot™ is a patented design by Louisville Ladder. For full description, see ladder features on pages 8-9. Patent #7,000,731 B2

# WHEN TO USE...

## STEPLADDERS

Excellent for low and medium-height jobs, with adequate space for working. Manufactured with fiberglass or aluminum rails, and equipped with multifunctional tops for holding tools, paint, and hardware. These ladders are great for diverse professional and household tasks.



## EXTENSION LADDERS

Extension ladders are designed for extended height tasks. Available in aluminum or fiberglass, and with adjustable lengths, these ladders are versatile and can be used for most jobs.



## PLATFORM LADDERS

Excellent for any task that requires extended periods of standing at an elevation/height. Our platform ladders feature a full platform and slim profile for better storage. Great option for painters, decorators and electricians.



## TWIN STEPLADDERS

Great for jobs that require two people on the ladder simultaneously. Manufactured with steps on both sides, it can be climbed from either side. The ladder will hold its Duty Rating simultaneously on each side of the ladder.



TWIN STEPLADDER



STAIRWAY



STRAIGHT / EXTENSION



PLANK SUPPORT

## MULTI PURPOSE LADDERS

Multi Purpose ladders are efficient four ladders in one. Can be opened into a twin stepladder or stairway ladder; also can be fully extended to become an extension ladder or separated for scaffolding planks or platforms.

## TRIPOD LADDERS

Tripod ladders are great for irregular surfaces and reduced areas. The back rail fits easily into tight angles and other confined spaces like between 2x4's.



# LADDER FEATURES

Feature images depicted on these pages may vary according to ladder model.

## STEPLADDER



### CENTER-PULL SPREADER BRACE

Unique center-pull spreader brace designed for one-hand operation. Brace is steel-plated for extra durability.



### DA BOOT™

Polypropylene copolymer upper boot provides strength, durability and fiberglass rail surface protection. Thick non-marring thermoplastic elastomer tread is bonded and mechanically fastened to the upper boot and provides a slip-resistant footing. Inside, Da Boot™ has a unique open design that allows for quick and easy visual inspection of fiberglass rail. Patent #7,000,731 B2



### DOUBLE-RIVET STEP CONSTRUCTION

Each step secured with six, large-headed, solid rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



### FULL METAL BOOT

Extra heavy duty cast aluminum shoes with thick rubber tread. Exclusive Louisville Ladder design. Reinforcement plates wrap around the rail for unsurpassed durability.



### HEAVY DUTY GUSSET BRACING

All gussets are heavy duty steel. Added to angle back braces and steps for extra support.



### HEAVY GAUGE METAL TOP

Metal tool tray top attached to front rails with four rivets and a shoulder bolt and nut on top hinge.



### INSIDE SPREADER BRACES

Spreader braces inside fiberglass rails help protect braces from getting hooked or abused in transit.



### MOLDED TOP WITH RECESSED TRAY / HANDYMAN'S TOOL SLOTS

Non-conductive structural molded top provides greater impact resistance and durability than aluminum tops. Large parts tray recessed 1/4" deep with tool slots.



### OPTIONAL MOLDED PAIL SHELF

Features many tools slots, a drill slot, and can securely hold a paint tray as well as round or square paint buckets.



### PINCH-RESISTANT SPREADER BRACES

Heavy duty steel-plated spreader braces with double rivet hinge to protect user from pinched fingers.



### PROTOP™ - VERSATILE AND DURABLE

ProTop™ is a multifunctional top featuring a magnet tray, hardware tray, curved ergonomic front, drill and tool slots, paint bucket holder, and a pipe or 2x4 holder to increase productivity. Patent #D597,685 & patents pending



### REINFORCEMENT PLATES

Reinforcement plates wrap around the rail at spreader brace for unsurpassed durability.



### SHOX™ - SUPERIOR IMPACT ABSORPTION

Side rail impact absorption system that reduces damage to the first step, thus prolonging the life of the ladder.



### SLIP-RESISTANT RUBBER FEET

Aluminum angle feet with thick rubber tread on all four legs to provide sure footing.



### WIDE BACK BRACES

Vertically mounted U-shaped back braces spaced at one foot intervals provide maximum stiffness and discourage unsafe climbing. Heavy duty bottom back brace provides additional strength to the bottom of the ladder.



## EXTENSION LADDER



### ALUMINUM CAST RAIL END CAPS

Extra heavy duty cast aluminum caps on all rail ends for rail protection, longer life and durability.



### ALUMINUM PLATE CONNECTION RUNGS

Tempered aluminum rungs are hydraulically double-crimped to aluminum plate. Each plate is fastened to side rails with four solid aluminum rivets.



### D-SHAPED RUNGS

Flat top, D-shape provides greater standing area than round rungs. Fully serrated for slip-resistant surface.



### DOUBLE ROPE & PULLEY

All aluminum double pulley system comes with a rot-resistant manila rope for all weather performance.



### FULL I-BEAM

Slide rails are extra heavy duty 3" I-beam extrusions for maximum strength.



### FULL METAL BOOT™

Extra heavy duty cast aluminum shoes with thick rubber tread. Exclusive Louisville Ladder design. Reinforcement plates wrap around the rail for unsurpassed durability.



### MAR-RESISTANT RAIL END CAPS

Impact-resistant caps on all rail ends provide rail protection for longer life and protect work surfaces from marring.



### MODIFIED I-BEAM

Side rails are full 3" extrusions shaped into a modified I-beam for strength and light weight. Interlocking rails keep fly and base sections from coming apart.



### OUTSIDE SLIDE GUIDES

Two extra heavy duty outside slide guides secured to top of base section with four rivets per guide for maximum strength. Over extending stop on fly section.



### PROGRIP™ - GET A GRIP ON YOUR TASK!

Integrated slip-resistant ladder caps that protect the support surface from damage while including easy-carry hand grips.



### PROTOP™

A multifunctional top designed to increase productivity. Patent #7,753,170



### QUICKLATCH® EQUIPPED RUNGLOCK

Provides easier method of securing fly and base sections when extended. One-finger operation. Patent #5429207



### ROUND RUNGS

Tempered round aluminum rungs are fully serrated for slip-resistant surface. Each rung end is hydraulically double-crimped to side rail.



### RUBBER FLY SECTION SHOES

Fly section is equipped with solid rubber end cap shoes enabling the fly section to be used separately as a straight ladder.



### STACKED ALUMINUM I-BEAM RAIL

Extra heavy duty outside slide guides secured to top of base section with four rivets per guide.



### SWIVEL SAFETY SHOES

Heavy duty steel-plated shoes with thick rubber tread. Shoe can be used with tread down or in spike position.



# FIBERGLASS 375 lb. load capacity\* TYPE IAA

## STEPLADDER FS1100HD SERIES



FS1106HD

**SHOX**

# FIBERGLASS 375 lb. load capacity\* TYPE IAA

## STEPLADDER FS1300HD SERIES




FS1306HD

- SHOX™ - superior impact absorption**
- Molded top with recessed tray**
- Full Metal Boot™**
- Extra heavy duty inside spreader braces**
- Heavy duty reinforcement plates**
- Double-rivet step construction w/ heavy duty gusset bracing**

- Heavy gauge metal top**
- Aluminum angle slip-resistant rubber feet**
- Inside spreader braces**
- Double-rivet step construction**
- Heavy duty gusset bracing**

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FS1104HD	4'	3"	20 1/8"	29"	19	4.2'
FS1106HD	6'	3"	24 1/8"	40 1/8"	27	7.2'
FS1108HD	8'	3"	27 1/8"	52 1/8"	36	11.1'
FS1110HD	10'	3"	31 1/8"	64 1/8"	45	15.5'
FS1112HD	12'	3"	34 1/8"	76 1/4"	56	20.4'

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FS1304HD	4'	3"	18 1/8"	29"	15	4'
FS1305HD	5'	3"	20 1/8"	35"	18	5.4'
FS1306HD	6'	3"	21 1/8"	41"	22	6.8'
FS1308HD	8'	3"	24 1/8"	54"	28	10.3'
FS1310HD	10'	3"	27 1/8"	64 1/8"	40	14.2'
FS1312HD	12'	3"	30 1/8"	78"	41	18.4'



**ANSI**  
Best in class equipment  
 of America's Most Trusted Ladders  
 ANSI A14.5



**FULL METAL BOOT**



**ANSI**  
Best in class equipment  
 of America's Most Trusted Ladders  
 ANSI A14.5



# FIBERGLASS 375 lbs. load capacity\* STEPLADDER FS1400HD SERIES

BRUTE 375



FS1406HD



Patent #D597,685 & patents pending

A multifunctional top designed to increase productivity.

- **HARDWARE TRAY**  
Recessed tray provides area to secure hardware from falling off the top.
- **PAINT BUCKET HOLDER**  
Convenient recessed tray holds quarter/half/full gallon paint buckets.
- **DRILL SLOTS**  
Two separate drill slots make for a variety of convenient options especially when also using the paint bucket holder.
- **SCREWDRIVERS/PLIERS**  
Featuring plenty of slots, ProTop™ will hold all the tools needed.
- **CURVED FRONT**  
Curved surface on front of top helps provide leg comfort.
- **PIPE & 2X4 HOLDER**  
Groove across top keeps pipes and 2x4's from getting away from you.
- **MAGNET TRAY**  
Easily secures metallic hardware and tools. Not available on Type II ladders.

**SHOX™ - superior impact absorption**



**ProTop™ - versatile and durable**



**Da Boot™ Patent #7,000,731 B2**



**Inside spreader braces**



**Riveted step construction with gussets**



**Wide back braces**



## SHOX™

The cutting edge of impact absorption!

- ENHANCED IMPACT ABSORPTION
- BETTER PROTECTION AGAINST DAMAGE
- ALSO AVAILABLE WITH THE SUPERIOR DA BOOT™

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FS1403HD	3'	3"	17 1/4"	24 1/4"	11.7	2.4'
FS1404HD	4'	3"	19 1/4"	28 1/4"	15	3.7'
FS1405HD	5'	3"	21 1/4"	34 1/4"	17	4.8'
FS1406HD	6'	3"	22 1/4"	40 1/4"	21	6.1'
FS1407HD	7'	3"	24 1/4"	46 1/4"	25	7.5'
FS1408HD	8'	3"	25 1/4"	52 1/4"	28	8.7'
FS1410HD	10'	3"	28 1/4"	64 1/4"	34	12.6'
FS1412HD	12'	3"	31 1/4"	76 1/4"	51	16.7'



# FIBERGLASS

**300** lbs. load capacity\*  
TYPE IA

## STEPLADDER FS1500 SERIES

# FIBERGLASS

**300** lbs. load capacity\*  
TYPE IA

## STEPLADDER L-3016 SERIES

STEPLADDERS



MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FS1502*	2'	3"	17"	18 1/4"	8	1.8'
FS1503	3'	3"	18 1/4"	23	12	2.6'
FS1504	4'	3"	19 1/4"	28 1/4"	14	3.6'
FS1505	5'	3"	21 1/4"	34 1/4"	17	4.9'
FS1506	6'	3"	22 1/4"	40 1/4"	20	5.7'
FS1507	7'	3"	24 1/4"	46 1/4"	22	7.9'
FS1508	8'	3"	25 1/4"	52 1/4"	26	8.7'
FS1510	10'	3"	28 1/4"	64 1/4"	34	10.9'
FS1512	12'	3"	31 1/4"	76 1/4"	47	15.8'

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
L-3016-04	4'	3"	18 1/4"	28 1/4"	14	3.6'
L-3016-06	6'	3"	21 1/4"	40 1/4"	20	5.7'
L-3016-08	8'	3"	24 1/4"	51 1/4"	26	8.7'
L-3016-10	10'	3"	27 1/4"	64 1/4"	34	10'
L-3016-12	12'	3"	30 1/4"	75 1/4"	47	15.8'



\*FS1502 is a folding step stand & is not equipped with Da Boot™, ProTop™, SHOX™, or inside spreader braces.

# FIBERGLASS

**250** lbs. load capacity\*  
TYPE I

## STEPLADDER FS2000 SERIES



FS2006



# FIBERGLASS

**225** lbs. load capacity\*  
TYPE II

## STEPLADDER FS4000 SERIES



FS4006




STEPLADDERS

- ProTop™ - versatile and durable**
- Aluminum angle slip-resistant rubber feet**
- Pinch-resistant spreader braces**
- Double-rivet step construction**
- Steel gusset bracing**
- Optional molded pail shelf**

- ProTop™ - versatile and durable\***
- Slip-resistant rubber feet**
- Pinch-resistant spreader braces**
- Steel gusset bracing**
- Optional molded pail shelf**

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FS2004	4'	3"	18 1/4"	28 3/8"	12	3.4'
FS2005	5'	3"	20 3/8"	34 1/8"	15	4.6'
FS2006	6'	3"	21 1/4"	40 1/8"	17	5.9'
FS2007	7'	3"	23 3/8"	46"	20	7.2'
FS2008	8'	3"	24 3/8"	51 3/8"	22	8.9'

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FS4004	4'	3'	18 1/4"	28 3/8"	11	3.4'
FS4006	6'	3'	21 1/4"	40 1/8"	16	5.9'
FS4007	7'	3'	23 3/8"	46"	18	7.2'
FS4008	8'	3'	24 3/8"	51 3/8"	21	8.9'



**ANSI**  
American National Standards Institute  
ANSI A14.5



**ANSI**  
American National Standards Institute  
ANSI A14.5



\*ProTop™ does not include magnet on FS4000 series.

# FIBERGLASS 375 lbs. load capacity\* TYPE IAA

## TWIN FRONT LADDER FM1100HD SERIES



FM1106HD

**SHOX**

# FIBERGLASS 375 lbs. load capacity\* TYPE IAA

## TWIN FRONT LADDER FM1400HD SERIES



FM1406HD

**SHOX**

- SHOX™ - superior impact absorption**
- Full Metal Boot™**
- Inside spreader braces**
- Heavy gauge steel hinges**
- Double-rivet step construction w/ heavy duty gusset bracing**
- Reinforcement plates**

- SHOX™ - superior impact absorption**
- Da Boot™ Patent #7,000,731 B2**
- Heavy gauge steel hinges**
- Inside spreader braces**
- Heavy duty gusset bracing**
- Riveted step construction**

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FM1104HD	4'	3"	20 1/2"	36"	28	5.2'
FM1106HD	6'	3"	24"	52"	32	9'
FM1108HD	8'	3"	27 1/2"	67"	48	13.7'
FM1110HD	10'	3"	31"	83"	64	19.2'
FM1112HD	12'	3"	34 1/2"	98"	78	25.5'

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FM1404HD	4'	3"	19 1/8"	37 1/2"	21	4.7'
FM1405HD	5'	3"	21 1/8"	44 1/8"	24	6.5'
FM1406HD	6'	3"	22 1/8"	52 1/8"	27	8.3'
FM1407HD	7'	3"	24 1/8"	59 1/8"	32	10.2'
FM1408HD	8'	3"	25 1/8"	67 1/8"	36	12.4'
FM1410HD	10'	3"	28 1/8"	81 1/8"	55	17.5'
FM1412HD	12'	3"	31 1/8"	96 1/8"	68	23.2'
FM1414HD*	14'	3"	34 1/8"	111 1/2"	84	27.5'
FM1416HD*	16'	3"	37 1/8"	126 1/8"	100	33.5'



BOTH SIDES of twin front ladders can be used simultaneously by one person plus materials. Therefore the duty rating for this ladder is PER SIDE.



\*Special duty; manufacturer tested to 375 lbs. BOTH SIDES of twin front ladders can be used simultaneously by one person plus materials. Therefore the duty rating for this ladder is PER SIDE.

# FIBERGLASS 375 TYPE IAA lbs. load capacity\*

## TWIN FRONT MRI LADDER L-3431-MR SERIES



L-3431-06MR

# FIBERGLASS 300 TYPE IA lbs. load capacity\*

## TWIN FRONT LADDER FM1500 SERIES



FM1506

**SHOX**

TWIN FRONT LADDERS

- Da Boot™** Patent #7,000,731 B2
- Heavy gauge aluminum hinges**
- Heavy duty aluminum gusset bracing**
- Aluminum riveted step construction**
- Aluminum spreader braces**

- SHOX™ - superior impact absorption**
- Da Boot™** Patent #7,000,731 B2
- Inside spreader braces**
- Double-rivet step construction**
- Heavy gauge steel hinges**

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
L-3431-06MR	6'	3"	23"	53 1/2"	27	8.5'
L-3431-08MR	8'	3"	26"	67 1/2"	34	12.5'

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FM1503	3'	3"	18 1/8"	30 1/8"	16	3.4'
FM1504	4'	3"	19 1/8"	37 1/2"	19	4.9'
FM1505	5'	3"	21 1/8"	44 7/8"	22	6.5'
FM1506	6'	3"	22 1/8"	52 1/8"	27	8.4'
FM1507	7'	3"	24 1/8"	59 1/8"	30	10.2'
FM1508	8'	3"	25 1/8"	67 1/8"	34	12.3'
FM1510	10'	3"	28 1/8"	81 1/8"	44	17.3'
FM1512	12'	3"	31 1/8"	96 1/8"	62	23.1'

BOTH SIDES of twin front ladders can be used simultaneously by one person plus materials. Therefore the duty rating for this ladder is PER SIDE.

BOTH SIDES of twin front ladders can be used simultaneously by one person plus materials. Therefore the duty rating for this ladder is PER SIDE.

**MR Conditional**

Non-clinical testing demonstrated that these products are MR Conditional and can be used in the MRI environment according to the following conditions:

- ▶ Static magnetic field of 3-Tesla or less
- ▶ Spatial gradient magnetic field of 720-Gauss/cm or less

**IMPORTANT NOTE:** This product is intended for use inside of the MRI environment (e.g., in the MR system room, close to the scanner). However, the ladder is not intended to be utilized directly inside of the MR system (e.g., inside of the bore of the scanner), itself. As such, the assessment of magnetic field interactions for this product specifically involved a qualitative evaluation of translational attraction in relation to exposure to a 3-Tesla MR system.

# FIBERGLASS 250 lb. lead capacity\* TWIN FRONT LADDER FM2000 SERIES

**TYPE I**  
lead capacity\*



FM2006

# FIBERGLASS 375 lb. lead capacity\* PLATFORM LADDER FP1100HD SERIES

**TYPE IAA**  
lead capacity\*



FP1104HD

**SHOX**

Platform dimensions:  
See page 17

- Aluminum angle slip-resistant rubber feet**
- Heavy gauge steel hinges**
- Steel gusset bracing**
- Double-rivet step construction**
- Pinch-resistant spreader braces**

- SHOX™ - superior impact absorption**
- Full Metal Boot™**
- Top rail guard**
- Slim, gapless slip-resistant platform**
- Double-rivet step construction**
- Heavy duty gusset bracing**

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FM2004	4'	3"	18 3/4"	37 1/4"	17	4.6'
FM2006	6'	3"	21 3/4"	52"	24	8.1'
FM2008	8'	3"	24 3/4"	66 1/4"	34	12'
FM2010	10'	3"	27 3/4"	81 3/4"	45	16.8'
FM2012	12'	3"	30 3/4"	96 3/4"	55	22.1'

MODEL	HT. TO PLTFRM.	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FP1104HD	3' 9"	3"	24 3/4"	45 3/4"	25	5.4'
FP1106HD	5' 8"	3"	27 3/4"	52 3/4"	36	7.8'
FP1108HD	7' 7"	3"	30 3/4"	65"	49	10.4'
FP1110HD*	9' 6"	3"	33 3/4"	75 1/2"	61	13'
FP1112HD*	11' 5"	3"	36 3/4"	87 1/2"	73	15.6'

OSHA  
ANSI  
ANSI A14.5  
SA

OSHA  
ANSI  
ANSI A14.5  
SA  
SHOX  
375  
FULL METAL BOOT

BOTH SIDES of twin front ladders can be used simultaneously by one person plus materials. Therefore the duty rating for this ladder is PER SIDE.

\*Special duty; manufacturer tested to 375 lbs.



# FIBERGLASS 375 lb. load capacity\* TYPE IAA

## PLATFORM LADDER FP1400HD SERIES

# FIBERGLASS 300 lb. load capacity\* TYPE IA

## PLATFORM LADDER FP1500 SERIES

**BRUTE**



FP1404HD

**SHOX**



Platform dimensions



FP1504

**SHOX**

PLATFORM LADDERS

-  **SHOX™ - superior impact absorption**
-  **Da Boot™ Patent #7,000,731 B2**
-  **Top rail guard**
-  **Slim, gapless slip-resistant platform**
-  **Heavy duty gusset bracing**
-  **Riveted step construction**

-  **SHOX™ - superior impact absorption**
-  **Da Boot™ Patent #7,000,731 B2**
-  **Slim, gapless slip-resistant platform**
-  **Top rail guard**
-  **Double-rivet step construction**

MODEL	HT. TO PLTFRM.	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FP1403HD	2' 10"	3"	23 1/8"	34 1/4"	20	3.9'
FP1404HD	3' 9"	3"	24 1/8"	39 1/4"	22	5.2'
FP1405HD	4' 9"	3"	26 1/8"	45 1/4"	25	6.5'
FP1406HD	5' 8"	3"	27 1/4"	52"	28	7.6'
FP1408HD	7' 7"	3"	30 1/8"	63 1/4"	42	10.2'
FP1410HD*	9' 6"	3"	33 1/8"	75 1/4"	58	12.7'
FP1412HD*	11' 5"	3"	36 1/8"	86 1/4"	69	15.3'

MODEL	HT. TO PLTFRM.	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FP1503	2' 10"	3"	23 1/8"	34 1/4"	19	3.9'
FP1504	3' 9"	3"	24 1/8"	39 1/4"	23	5.2'
FP1505	4' 9"	3"	26 1/8"	45 1/4"	25	6.5'
FP1506	5' 8"	3"	27 1/4"	52"	28	7.6'
FP1508	7' 7"	3"	30 1/8"	63 1/4"	41	10'
FP1510	9' 6"	3"	33 1/8"	75 1/4"	57	12.9'
FP1512	11' 5"	3"	36 1/8"	86 1/4"	68	15.4'












\*Special duty: manufacturer tested to 375 lbs.

# FIBERGLASS 300 lb. load capacity\* TYPE IA

## TWIN FRONT PLATFORM LADDER FMP1500 SERIES

# FIBERGLASS 375 lb. load capacity\* TYPE IAA

## STEP-TO-STRAIGHT LADDER FC1200 SERIES



FMP1504-4C

**NEW!**

Platform dimensions:  
See AMP1000 on  
page 32



FC1206

- Da Boot™**  
Patent #7,000,731 B2
- Gapless slip-resistant platform**
- Top rail guard**
- Heavy duty casters**  
(on "4C" models only)
- Heavy gauge steel hinge**
- Double-rivet step construction**

- Hinging mechanism**
- Standard pole grip**
- Utility-style safety shoes**
- Double-rivet step construction**
- Runglock**

MODEL	HT. TO PLTFRM.	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	CASTER SIZE	APPROX. WT. (LBS)	APPROX. CUBES
FMP1504	4'	3"	25 1/4"	53 1/4"	-	34.87	6.40'
FMP1504-4C	4'	3"	25 1/4"	53 1/4"	3"	41.70	6.40'
FMP1506	6'	3"	28 1/4"	69 1/4"	-	55.72	8.79'
FMP1506-4C	6'	3"	28 1/4"	69 1/4"	3"	62.55	8.79'
FMP1508	8'	3"	31 1/4"	85"	-	76.53	12.45'
FMP1508-4C	8'	3"	31 1/4"	85"	3"	83.40	12.45'
FMP1510	10'	3"	34 1/4"	100 1/4"	-	97.42	15.53'
FMP1510-4C	10'	3"	34 1/4"	100 1/4"	3"	104.24	15.53'

MODEL	LADDER SIZE	MAX. EXT. LENGTH	FLARED SECTION MIN. O.D.	FLARED SECTION MAX. O.D.
FC1206	6'	9'	17 1/4"	23 1/4"
FC1207	7'	11'	17 1/4"	24 1/4"
FC1208	8'	13'	17 1/4"	25 1/4"

MODEL	PARALLEL SECTION O.D.	APPROX. WT. (LBS)	APPROX. CUBES
FC1206	14 1/4"	33	6.8'
FC1207	14 1/4"	36	8.4'
FC1208	14 1/4"	41	9.8'

Table continued below...



O.D. denotes outside dimension

# FIBERGLASS **300** lb. TYPE IA lead capacity\*

## TRIPOD LADDER FT1000 SERIES



FT1006

# FIBERGLASS **300** lb. TYPE IA lead capacity\*

## ULTIMATE ARTICULATED LADDER L-3092 SERIES



L-3092-15

SPECIALTY LADDERS

**Full Metal Boot™**

**Steel reinforced outrigger**

**Center-pull spreader brace**

**Double-rivet step construction**

**Outrigger rail brackets**

**Heavy duty gusset bracing**

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FT1004	4'	3"	28 3/4"	29"	17	6.1'
FT1005	5'	3"	30 3/4"	35"	20	7.2'
FT1006	6'	3"	35 3/4"	41"	24	10.5'
FT1007	7'	3"	37"	48"	27	14.2'
FT1008	8'	3"	41 3/4"	54"	31	15.5'
FT1010	10'	3"	44 1/2"	66"	44	22.5'
FT1012	12'	3"	53 1/2"	78"	53	32.9'




**EasyHinge™**

**Comfortable wide side rails**

**Built-In Stabilizer**

MODEL	LADDER SIZE	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
L-3092-13	13'	13'	46	5.15'
L-3092-15	15'	15'	49	7.5'

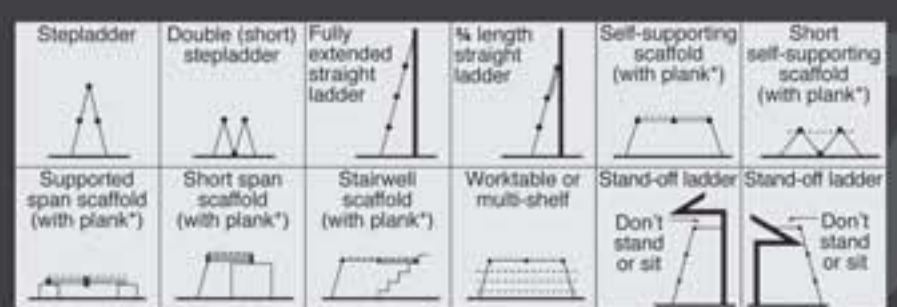

\*2" x 12" plank needed for these positions

**FIBERGLASS** **375** lbs. load capacity\* TYPE IAA  
**TWIN FRONT STEP STOOL L-3433 SERIES**

**FIBERGLASS** **300** lbs. load capacity\* TYPE IA  
**INDUSTRIAL STEP STAND FY8000 SERIES**

**NEW!**



L-3433-02




FY8002

- Aluminum angle slip-resistant rubber feet
- Heavy gauge steel hinges
- Heavy duty gusset bracing
- Double-rivet step construction

- Large molded top
- Large aluminum steps
- Double-rivet step construction
- Heavy duty gusset bracing
- Optional casters and handle

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
L-3433-02	2'	3"	21"	23"	10.58	1.96'



BOTH SIDES of twin front ladders can be used simultaneously by one person plus materials. Therefore the duty rating for this ladder is PER SIDE.

MODEL	HT. TO TOP STEP	TOP SIZE (W x D)
FY8001*	13"	14" x 9 1/4"
FY8002	23"	14" x 9 1/4"
FY8003	34 1/2"	14" x 9 1/4"
FY8004	45 1/4"	14" x 9 1/4"

Table continued below...

MODEL	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
FY8001*	6"	15"	15 1/2"	8	2.6'
FY8002	6"	17 1/4"	20 1/2"	15	2.7'
FY8003	6"	19 1/4"	26 1/2"	20	4.1'
FY8004	6"	21 1/4"	32 1/2"	25	5.8'



\*Casters and handle option not available on this model.

# FIBERGLASS **300** lb. load capacity\* TYPE IA

## MINI WORKING PLATFORM L-3041 SERIES



- 12" wide slip-resistant standing surface
- Slip-resistant rubber feet
- Easy to use locking hinge
- Durable non-conductive fiberglass rails

MODEL	WORK AREA	BASE WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES	HT. TO PLTFRM.
L-3041-03	12" x 37 1/4"	16 1/4"	46 7/8"	13	2.1	21"



# FIBERGLASS **300** lb. load capacity\* TYPE IA

## EXTENSION TRESTLE LADDER FX1100 SERIES




FX1108

- Aluminum angle slip-resistant rubber feet
- Locking bail
- Slide guides & spreader braces
- Heavy trestle top hinge
- Heavy duty gusset bracing

MODEL	LADDER SIZE	MAX. EXT. LENGTH	STEP DEPTH	BOTTOM WIDTH
FX1108	8'	12' 6"	3"	33"
FX1110	10'	15' 6"	3"	39"
FX1112	12'	19' 6"	3"	45"

Table continued below...

MODEL	APPROX. SPREAD	INSIDE WIDTH FLY	OUTSIDE WIDTH FLY	APPROX. WT. (LBS)	APPROX. CUBES
FX1108	70 1/4"	15 1/2"	18 1/4"	65	19.1'
FX1110	82 3/8"	15 1/2"	18 1/4"	90	22.7'
FX1112	93 1/8"	15 1/2"	18 1/4"	115	30.4'



# FIBERGLASS

**300** lbs. **TYPE IA** load capacity\*

## SHELF LADDER FH1000 SERIES



FH1006

# FIBERGLASS

**300** lbs. **TYPE IA** load capacity\*


## MANHOLE LADDER FE8800 SERIES



FE8810



MODEL	LADDER SIZE	STEP DEPTH	WIDTH	APPROX. WT. (LBS)	APPROX. CUBES
FH1004	4'	3"	15 1/4"	8	1.5'
FH1005	5'	3"	15 1/4"	10	1.9'
FH1006	6'	3"	15 1/4"	11	2.4'
FH1007	7'	3"	15 1/4"	12	2.7'
FH1008	8'	3"	15 1/4"	14	3'
FH1010	10'	3"	15 1/4"	20	3.6'
FH1012	12'	3"	15 1/4"	24	4.5'
FH1014	14'	3"	15 1/4"	28	5.2'
FH1016	16'	3"	15 1/4"	32	6.1'



SIZES	RAIL DEPTH	OUTSIDE WIDTH	INSIDE WIDTH
8'-20'	3 1/4"	14"	11 1/4"

SINGLE LADDERS			
MODEL	TOTAL LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
FE8808	8'	19	2.5'
FE8810	10'	23	3.2'
FE8812	12'	25	3.8'
FE8814	14'	30	4.4'
FE8816	16'	36	5'
FE8818	18'	41	5.7'
FE8820	20'	45	6.3'



# FIBERGLASS 375 TYPE IAA EXTENSION LADDER FE4000HD SERIES



FE4220HD



D-RUNG	MODEL	TOTAL LENGTH	LENGTH EA. SECTION	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
	FE4216HD*	16'	8'	13'	41	6.4'
	FE4220HD	20'	10'	17'	50	9.5'
	FE4224HD	24'	12'	21'	58	10.4'
	FE4228HD	28'	14'	25'	67	12.5'
	FE4232HD	32'	16'	29'	81	14.4'

\*Does not include rope and pulley.

ROUND RUNG	MODEL	TOTAL LENGTH	LENGTH EA. SECTION	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
	FE4620HD	20'	10'	17'	48	9.5'
	> FE4624HD	24'	12'	21'	56	10.4'
	> FE4628HD	28'	14'	25'	64	12.5'
	FE4632HD	32'	16'	29'	73	14.4'

> Special order item.

SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE WIDTH		OUTSIDE WIDTH	
			BASE	FLY	BASE	FLY
16'-28'	3 1/4"	6"	15 1/4"	13 1/16"	17 3/4"	16 1/8"
32'	3 1/2"	6 1/8"	15 1/4"	13 1/16"	17 3/4"	16 1/8"



# FIBERGLASS

**300** lbs. TYPE IA  
load capacity\*

## EXTENSION LADDER FE3200 SERIES



FE3220



SINGLE LADDERS - FE3100			
MODEL	TOTAL LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
FE3108	8'	16	3'
FE3110	10'	21	5.3'
FE3112	12'	25	4.8'
FE3114	14'	28	5.6'
FE3116	16'	36	6.7'
FE3118	18'	41	7.5'
> FE3120	20'	45	11.4'
> Special order item.			
SIZES	RAIL DEPTH	OUTSIDE WIDTH	INSIDE WIDTH
8'-14'	3 1/4"	17 1/8"	14 1/8"
16'-20'	3 3/8"	17 1/8"	15 3/8"

# ALSO AVAILABLE WITH...



L-3022-PT SERIES

Patent #7,753,170

A multifunctional top designed to increase productivity.

- CORNER GRIP**  
 The V-shape design provides greater stability on corners.
- POLE GRIP**  
 The V-shape design with rubber tread makes it ideal for working against poles or trees. The tool slots provide the option for lashing the ladder to the pole or tree.
- INTEGRATED BUMPER**  
 Soft non-marking/non-marring rubber tread protects the work surface.
- WIDER DESIGN**  
 Wider design provides greater stability and 700% more contact area on flat surfaces.
- WORK TRAY**  
 Non-conductive molded work-tray with convenient handyman's tool slots.

EXTENSION LADDERS WITH PROTOP™					
MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
L-3022-20PT	20'	10'	17'	42	8.6'
L-3022-24PT	24'	12'	21'	52	10.2'
L-3022-28PT	28'	14'	25'	58	10.6'
L-3022-32PT	32'	16'	29'	70	12'

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
FE3216*	16'	8'	13'	30	6.5'
FE3220	20'	10'	17'	42	8.6'
FE3224	24'	12'	21'	52	10.2'
FE3228	28'	14'	25'	58	11.9'
FE3232	32'	16'	29'	70	12.6'
FE3236	36'	18'	32'	84	15.8'
FE3240	40'	20'	35'	92	17.5'

\*Does not include rope and pulley.

SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE WIDTH		OUTSIDE WIDTH	
			BASE	FLY	BASE	FLY
16'-28'	3 1/4"	6 1/4"	14 1/8"	13 1/8"	17 1/8"	16 1/8"
32'-40'	3 3/8"	6 1/2"	15 1/8"	14 1/8"	18 1/4"	16 1/8"





## PLATE CONNECT EXTENSION LADDER FE7000 SERIES



FE7220



ROUND-RUNG	SINGLE LADDERS			
	MODEL	TOTAL LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
	FE7512	12'	27	4.8'
	> FE7514	14'	31	5.6'
	> FE7516	16'	36	7.0'
	> FE7518	18'	50	11.3'
	> FE7520	20'	54	15.3'

> Special order item.

D-RUNG	SINGLE LADDERS			
	MODEL	TOTAL LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
	FE7108	8'	16	4.7'
	FE7110	10'	22	6.9'
	FE7112	12'	26	7.3'
	FE7114	14'	32	8.3'
	FE7116	16'	37	9.5'
	FE7118	18'	53	10.6'
	FE7120	20'	61	12.8'

D-RUNG	MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
	FE7216*	16'	8'	13'	34	6.7'
	FE7220	20'	10'	17'	45	8.8'
	FE7224	24'	12'	21'	53	10.7'
	FE7228	28'	14'	25'	62	12.5'
	FE7232	32'	16'	29'	72	14.1'
	FE7236	36'	18'	32'	110	19.1'
	FE7240	40'	20'	35'	117	21.1'

\*Does not include rope and pulley.

ROUND-RUNG	MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
	FE7616*	16'	8'	13'	34	6.7'
	FE7620	20'	10'	17'	44	8.8'
	FE7624	24'	12'	21'	52	10.7'
	FE7628	28'	14'	25'	60	12.5'
	FE7632	32'	16'	29'	73	14.1'
	FE7636	36'	18'	32'	100	19.1'
	FE7640	40'	20'	35'	108	21.1'

\*Does not include rope and pulley.

SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE WIDTH		OUTSIDE WIDTH	
			BASE	FLY	BASE	FLY
16'-28'	3 3/4"	6 3/4"	15"	13 1/4"	17 3/8"	16 1/4"
32'	3 5/8"	6 3/4"	15"	13 1/4"	17 3/8"	16 1/4"
36'-40'	4"	6 1/2"	15"	13 1/4"	18 1/2"	17 1/4"



# FIBERGLASS

**250** lbs. load capacity\*  
TYPE I

## EXTENSION LADDER FE1700 SERIES



FE1720

# FIBERGLASS

**225** lbs. load capacity\*  
TYPE II

## EXTENSION LADDER FE0600 SERIES



FE0620

- QuickLatch®**  
Patent # 5429207
- Steel swivel safety shoe with metal shield
- D-shaped rungs
- Outside slide guides
- Mar-resistant rail end caps

- QuickLatch®**  
Patent # 5429207
- Steel swivel safety shoe with metal shield
- Mar-resistant rail end caps
- Outside slide guides
- D-shaped rungs

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
FE1716*	16'	8'	13'	30	6.9'
FE1720	20'	10'	17'	44	8.6'
FE1724	24'	12'	21'	52	10.2'
FE1728	28'	14'	25'	60	11.8'

MODEL	TOTAL LENGTH	LENGTH EA. SECTION	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
FE0616*	16'	8'	13'	28	6.9
FE0620	20'	10'	17'	39	8.6
FE0624	24'	12'	21'	48	10.2
> FE0628	28'	14'	25'	53	11.8

\*Does not include rope and pulley.

\*Does not include rope and pulley.  
> Special order item.

SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE WIDTH		OUTSIDE WIDTH	
			BASE	FLY	BASE	FLY
16'-20'	3 1/4"	6 1/4"	14 1/16"	13 1/16"	17 1/16"	16 1/16"
24'-28'	3 5/16"	6 1/4"	15 5/16"	14 3/16"	17 1/16"	16 1/16"

SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE WIDTH		OUTSIDE WIDTH	
			BASE	FLY	BASE	FLY
16'-28'	3 1/4"	6 1/4"	14 1/16"	13 1/16"	17 1/16"	16 1/16"



# ALUMINUM 375 lb. load capacity\* TYPE IAA STEPLADDER AS1100HD SERIES



AS1106HD

# ALUMINUM 300 lb. load capacity\* TYPE IA STEPLADDER AS1000 SERIES




AS1006

STEPLADDERS



MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
AS1106HD	6'	3"	22 1/4"	40"	25	6.9'
AS1108HD	8'	3"	25 1/4"	52 1/4"	30	9.7'
AS1110HD	10'	3"	28 1/4"	64 1/2"	37	12.9'
AS1112HD	12'	3"	31 1/4"	76 1/2"	44	15.4'

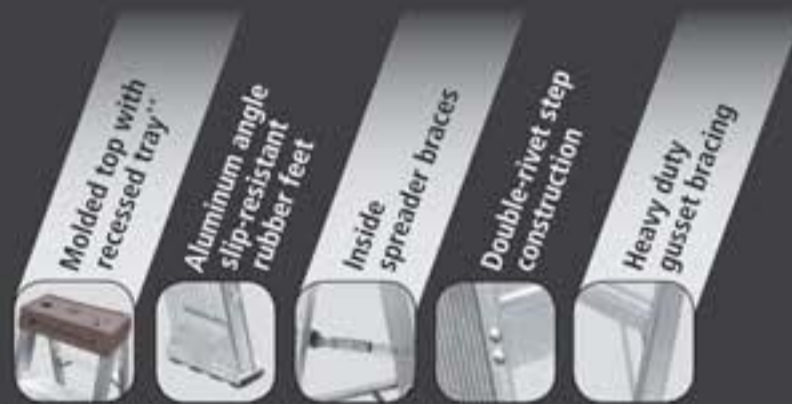

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
AS1003	3'	3"	18 5/8"	23 1/4"	12	2.9'
AS1004	4'	3"	19 1/8"	29 1/8"	14	3.7'
AS1006	6'	3"	22 1/8"	41"	20	7.1'
AS1008	8'	3"	25 1/8"	52 1/8"	24	9.2'
AS1010	10'	3"	28 1/8"	64 1/2"	30	14.2'
AS1012	12'	3"	31 1/8"	76 3/8"	38	19'
AS1014*	14'	3 3/8"	34 3/4"	90"	60	33.4'
AS1016*	16'	3 3/8"	37 1/4"	102"	70	34.2'
AS1018*	18'	3 3/8"	40 3/4"	114"	81	50.2'
AS1020*	20'	3 3/8"	43 3/4"	126"	93	61'



\*\*Molded top only on 3'-12' models, otherwise aluminum top.  
\*Pail shelf not available on these models.

# ALUMINUM STEPLADDER AS3000 SERIES

**300** lb. load capacity\*  
TYPE IA

# ALUMINUM STEPLADDER AS2100 SERIES

**250** lb. load capacity\*  
TYPE I

STEPLADDERS



MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
AS3002*	2'	3"	16 1/4"	18 1/4"	6	1.5'
AS3003	3'	3"	17 1/4"	22 1/4"	10	2.1'
AS3004	4'	3"	18 1/4"	28 3/4"	13	3.1'
AS3005	5'	3"	20 1/4"	33 1/4"	15	4.5'
AS3006	6'	3"	21 1/4"	39 3/4"	17	5.7'
AS3008	8'	3"	24 1/4"	51 1/4"	23	8.6'
AS3010	10'	3"	27 1/4"	63 3/4"	28	12.5'

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
AS2104	4'	3"	18 1/4"	28 1/4"	11	3.1'
AS2106	6'	3"	21 1/4"	39 3/4"	15	5.7'
AS2108	8'	3"	24 1/4"	51 1/4"	22	7.2'
AS2110	10'	3"	27 1/4"	63 3/4"	28	9.7'



\*AS3002 is a folding step stand and is not equipped with the ProTop™.  
\*\*Center-pull spreader only available on 3'-6' models - outside spreader brace otherwise.

Our molded pail shelf is durable and multifunctional designed to increase productivity just like our ProTop™. It features grooves for securing a paint tray, quart and gallon paint bucket holder, hardware tray, drill and tool slots.



# ALUMINUM 225 lb. TYPE II

## STEPLADDER AS4000 SERIES



AS4006

# ALUMINUM 375 lb. TYPE IAA

## TWIN FRONT LADDER AM1100HD SERIES



AM1106HD

Molded top with handyman's tool slots



Slip-resistant rubber feet



Pinch-resistant spreader braces




Steel gusset bracing



Molded pail shelf



MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
AS4003	3'	3"	16 1/4"	21 1/4"	8	2.1'
AS4004	4'	3"	17 3/8"	27 3/8"	9	2.3'
AS4005	5'	3"	19 1/4"	33 7/8"	11	3.3'
AS4006	6'	3"	20 3/8"	39 3/8"	13	4.6'
AS4008	8'	3"	23 3/8"	51 1/4"	18	7.1'



Heavy duty gusset bracing



Inside spreader braces



Aluminum angle slip-resistant rubber feet



Heavy gauge steel hinges



Double-rivet step construction



MODEL	LADDER SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
AM1104HD	4'	3"	21 3/8"	37 3/8"	24	4.8'
AM1106HD	6'	3"	24 3/8"	52 1/8"	34	8.4'
> AM1108HD	8'	3"	27 3/8"	66 1/8"	42	12.4'
AM1110HD	10'	3"	30 3/8"	81 1/8"	57	17.4'
AM1112HD	12'	3"	33 3/8"	96 1/8"	68	23.1'



> Special order item.  
BOTH SIDES of twin front ladders can be used simultaneously by one person plus materials.  
Therefore the duty rating for this ladder is PER SIDE.

# ALUMINUM

**375** lbs. TYPE IAA  
load capacity\*

## TWIN FRONT MRI LADDER L-2431-MR SERIES



L-2431-06

**NEW!**

# ALUMINUM

**300** lbs. TYPE IA  
load capacity\*

## TWIN FRONT LADDER AM1000 SERIES



AM1006



MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
L-2431-06MR	6'	3"	23"	53 1/2"	24	8.5
L-2431-08MR	8'	3"	26"	67 1/2"	33.6	12.5

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
AM1003	3'	3"	18 1/2"	30 3/8"	16	3.4'
AM1004	4'	3"	20"	37 3/8"	18	4.8'
AM1005	5'	3"	21 1/2"	45"	22	7'
AM1006	6'	3"	23"	52 3/8"	24	8.2'
AM1008	8'	3"	26"	67 3/8"	32	12.4'
AM1010	10'	3"	29"	82"	42	17.4'
AM1012	12'	3"	31"	96 1/8"	51	23.1'
AM1014	14'	3 3/8"	35"	111 3/8"	79	29.5'
AM1016	16'	3 3/8"	38"	126 3/8"	101	36.5'
AM1020	20'	3 3/8"	41"	156"	114	52.5'



**ANSI**  
American National Standards Institute  
ANSI A14.2

BOTH SIDES of twin front ladders can be used simultaneously by one person plus materials. Therefore the duty rating for this ladder is PER SIDE.



**ANSI**  
American National Standards Institute  
ANSI A14.2



BOTH SIDES of twin front ladders can be used simultaneously by one person plus materials. Therefore the duty rating for this ladder is PER SIDE.



**MR Conditional**

Non-clinical testing demonstrated that these products are MR Conditional and can be used in the MRI environment according to the following conditions:  
 ▶ Static magnetic field of 3-Tesla or less  
 ▶ Spatial gradient magnetic field of 720-Gauss/cm or less

**IMPORTANT NOTE:** This product is intended for use inside of the MRI environment (e.g., in the MR system room, close to the scanner). However, the ladder is not intended to be utilized directly inside of the MR system (e.g., inside of the bore of the scanner), itself. As such, the assessment of magnetic field interactions for this product specifically involved a qualitative evaluation of translational attraction in relation to exposure to a 3-Tesla MR system.

# ALUMINUM 375 lb. load capacity\* TYPE IAA

## PLATFORM STEPLADDER AP1100HD SERIES

# ALUMINUM 300 lb. load capacity\* TYPE IA

## PLATFORM STEPLADDER AP1000 SERIES




AP1104HD





AP1004

Platform dimensions

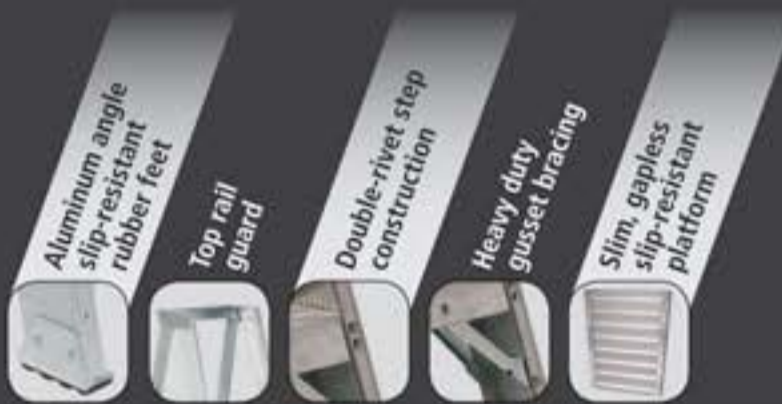

MODEL	HT. TO PLTFRM.	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
AP1104HD	3' 9"	3"	24 1/2"	43 1/4"	23	12.4'
AP1106HD	5' 8"	3"	27 1/2"	55 1/4"	30	16.2'
AP1108HD	7' 7"	3"	30 1/2"	67 1/4"	40	22.1'

MODEL	HT. TO PLTFRM.	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
AP1003	2' 10"	3"	23"	38"	20	8.5'
AP1004	3' 9"	3"	24 1/2"	43 1/4"	22	10.2'
AP1005	4' 9"	3"	26"	49 1/4"	24	13.2'
AP1006	5' 8"	3"	27 1/2"	55 1/4"	28	15.8'
AP1008	7' 7"	3"	30 1/2"	67 1/4"	36	21.7'
AP1010	9' 6"	3"	33 1/2"	79 1/2"	42	23.4'
AP1012	11' 5"	3 1/4"	36 1/2"	91 3/4"	64	37'
AP1014	13' 4"	3 1/4"	39 1/2"	103 1/4"	75	40'
AP1016	15' 3"	3 1/4"	42 1/2"	115 1/4"	85	44.2'




# ALUMINUM MOBILE PLATFORM LADDER AP5000 SERIES

**300** lbs. **TYPE IA** load capacity\*



AP5006

Platform dimensions



# ALUMINUM TWIN FRONT PLATFORM LADDER AMP1000 SERIES

**300** lbs. **TYPE IA** load capacity\*

**NEW!**



AMP1004-4C

Platform dimensions



- Bodyweight™ activated caster technology**
- Double-rivet step construction**
- Handrails**
- Slip-resistant platform**
- Heavy duty gusset bracing**
- Top rail guard**

- Da Boot™ Patent #7,000,731 B2**
- Gapless slip-resistant platform**
- Top rail guard**
- Heavy duty casters (on "4C" models only)**
- Heavy gauge steel hinge**
- Double-rivet step construction**

MODEL	HT. TO PLTRM.	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	CASTER SIZE	APPROX. WT. (LBS)	APPROX. CUBES
AP5004	3' 9"	3"	24 1/4"	44 1/4"	3"	42	13.9'
AP5006	5' 8"	3"	27 1/4"	54 1/4"	3"	56	18.7'
AP5008	7' 8"	3"	30 1/4"	65 1/4"	3"	68	27.1'
AP5010	9' 6"	3"	33 1/4"	76 1/4"	3"	82	38.1'

MODEL	HT. TO PLTRM.	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	CASTER SIZE	APPROX. WT. (LBS)	APPROX. CUBES
AMP1004	4'	3"	25 1/4"	53 1/4"	-	26.61	6.41'
AMP1004-4C	4'	3"	25 1/4"	53 1/4"	3"	34.10	6.41'
AMP1006	6'	3"	28 1/2"	69 1/2"	-	37.63	8.79'
AMP1006-4C	6'	3"	28 1/2"	69 1/2"	3"	45.13	8.79'
AMP1008	8'	3"	31 1/4"	85"	-	53.08	12.46'
AMP1008-4C	8'	3"	31 1/4"	85"	3"	60.58	12.46'
AMP1010	10'	3"	34 1/4"	100 1/4"	-	68.63	15.54'
AMP1010-4C	10'	3"	34 1/4"	100 1/4"	3"	76.12	15.54'

**BODYWEIGHT™** ACTIVATED CASTER TECHNOLOGY

**SAFETY** DANGER

**OSHA**

**ANSI** Built to exact requirements of American National Standards Institute ANSI A14.2

**SP**

**SAFETY** DANGER

**OSHA**

**ANSI** Built to exact requirements of American National Standards Institute ANSI A14.2

\*4C\* indicates models with 4 casters



# ALUMINUM 300 lb. TYPE IA lead capacity\*

## SAWHORSE LADDER L-2032 SERIES

# ALUMINUM 300 lb. TYPE IA lead capacity\*

## ULTIMATE ARTICULATED LADDER L-2090 SERIES




L-2032-03



L-2092-13




MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
L-2032-02	2'	3"	33 1/4"	22 1/2"	14	3.7'
L-2032-03	3'	3"	34 1/4"	30 1/4"	20	6.6'
L-2032-04	4'	3"	36 1/4"	37 1/4"	24	9.2'

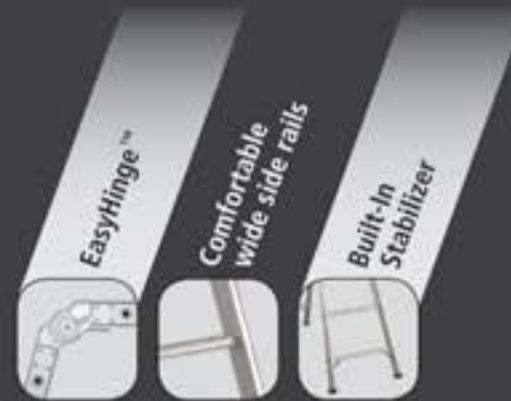

MODEL	LADDER SIZE	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
L-2092-13	13'	13'	36	5.15'
L-2091-17	17'	17'	43	7.5'



**ANSI**  
Stand on levels, equipment  
 & ladders follow safety codes  
**ANSI A14.2**

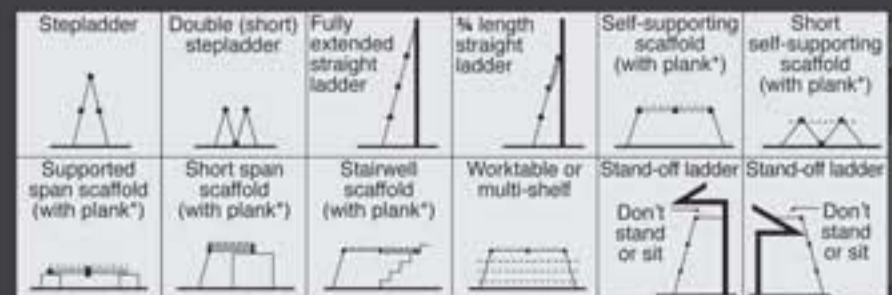

\*12" x 12" plank needed for these positions

# ALUMINUM

**375** lbs. TYPE IAA  
load capacity\*

## TWIN FRONT STEP STOOL L-2433 SERIES

**NEW!**


L-2433-02

# ALUMINUM

**300** lbs. TYPE IA  
load capacity\*

## INDUSTRIAL STEP STAND AY8000 SERIES



AY8002

 Aluminum angle  
 slip-resistant  
 rubber feet

 Heavy gauge  
 steel hinges

 Heavy duty  
 gusset bracing

 Double-rivet step  
 construction

 Large  
 molded top


 Large  
 aluminum steps

 Double-rivet step  
 construction

 Heavy duty  
 gusset bracing

 Optional casters  
 and handle


MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
L-2433-02	2'	3"	21"	23"	10.58	1.96'



BOTH SIDES of twin front ladders can be used simultaneously by one person plus materials. Therefore the duty rating for this ladder is PER SIDE.

MODEL	HT. TO TOP STEP	TOP SIZE (W x D)
AY8001*	13"	14" x 9 1/4"
AY8002	23"	14" x 9 1/4"
AY8003	34 1/2"	14" x 9 1/4"
AY8004	45 1/2"	14" x 9 1/4"

Table continued below...

MODEL	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
AY8001*	6"	15"	15 1/2"	8	2.5'
AY8002	6"	17 3/4"	20 1/2"	14	2.8'
AY8003	6"	19 3/4"	26 1/2"	19	3.6'
AY8004	6"	21 3/4"	32 1/2"	24	6.6'



\*Casters and handle option not available on this model

# ALUMINUM **300** lbs. TYPE IA lead capacity\* AIRCRAFT MECHANIC LADDER AM8000 SERIES



AM8006

# ALUMINUM **300** lbs. TYPE IA lead capacity\* EXTENSION TRESTLE LADDER AX1000 SERIES



AX1008

SPECIALTY LADDERS

- Durable design**
- Premium construction**
- Slip-resistant rubber feet**
- Extra large top platform**
- Tilt and roll**
- Double-rivet step construction**

MODEL	LADDER SIZE	STEP DEPTH	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
AM8003	3'	3 1/4"	24 1/2"	43 1/4"	44	7.6'
AM8004	4'	3 1/4"	25 1/2"	51 1/4"	55	10.8'
AM8006	6'	3 1/4"	28 1/2"	66 1/4"	69	18'
AM8008	8'	3 1/4"	31 1/2"	80 1/4"	84	25.1'
AM8010	10'	3 1/4"	34 1/2"	95 1/4"	100	36.7'
AM8012	12'	3 1/4"	37 1/2"	110 1/4"	115	47.7'
AM8014	14'	3 1/4"	40 1/2"	125 1/4"	134	60'



- Heavy duty trestle top hinge**
- Slide guides & spreader braces**
- Locking bail**
- Aluminum angle slip-resistant rubber feet**
- Double-rivet step construction**

MODEL	HT. TO PLATFORM	MAX. EXT. LENGTH	STEP DEPTH	BOTTOM WIDTH
AX1008	8'	12' 6"	3"	33"
AX1010	10'	15' 6"	3"	39"
AX1012	12'	19' 6"	3"	45"

Table continued below...

MODEL	APPROX. SPREAD	INSIDE WIDTH FLY	OUTSIDE WIDTH FLY	APPROX. WT. (LBS)	APPROX. CUBES
AX1008	69"	15 1/4"	17 1/4"	58	20.3'
AX1010	84"	15 1/4"	17 1/4"	74	29.3'
AX1012	99"	15 1/4"	17 1/4"	90	41.2'



# ALUMINUM SHELF LADDER AH1000 SERIES

**300** lbs. TYPE IA  
load capacity\*



AH1006

# ALUMINUM MULTI PURPOSE LADDER L-2094 SERIES

**300** lbs. TYPE IA  
load capacity\*




L-2094-17

**4** LADDERS  
IN ONE!

See configurations on pg. 7



MODEL	LADDER SIZE	STEP DEPTH	WIDTH	APPROX. WT. (LBS)	APPROX. CUBES
AH1004	4'	3"	15 1/4"	6	1.6'
AH1005	5'	3"	15 1/4"	8	2'
AH1006	6'	3"	15 1/4"	10	2.3'
AH1007	7'	3"	15 1/4"	11	2.7'
AH1008	8'	3"	15 1/4"	12	3.1'
AH1010	10'	3"	15 1/4"	16	3.5'
AH1012	12'	3"	15 1/4"	20	3.9'
AH1014	14'	3"	15 1/4"	23	4.3'
AH1016	16'	3"	15 1/4"	26	4.6'



MODEL	LADDER SIZE	APPROX. WT. (LBS)	APPROX. CUBES
L-2094-13	13'	35	4.0
L-2094-17	17'	42	5.2
L-2094-22	22'	50	6.4

Table continued below...

MODEL	ADJUSTABLE STEPLADDER	STAIRWAY	SCAFFOLDING	EXTENSION
L-2094-13	3' - 5'	3' - 5'	1' - 2'	7' - 11'
L-2094-17	4' - 7'	4' - 7'	1' - 4'	9' - 15'
L-2094-22	5' - 9'	5' - 9'	1' - 5'	11' - 19'



# ALUMINUM

**225** lb. **TYPE II**  
lead capacity\*

## MINI WORKING PLATFORM L-2241 SERIES


SPECIALTY LADDERS



**LOUISVILLE.**  
 LADDERS TRUSTED BY THE PROS FOR OVER 65 YEARS



MODEL	WORK AREA	APPROX. BASE WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES	HT. TO PLTFRM.
L-2241-03	12" x 37 1/4"	16 1/4"	47 7/8"	11	2.4	21"

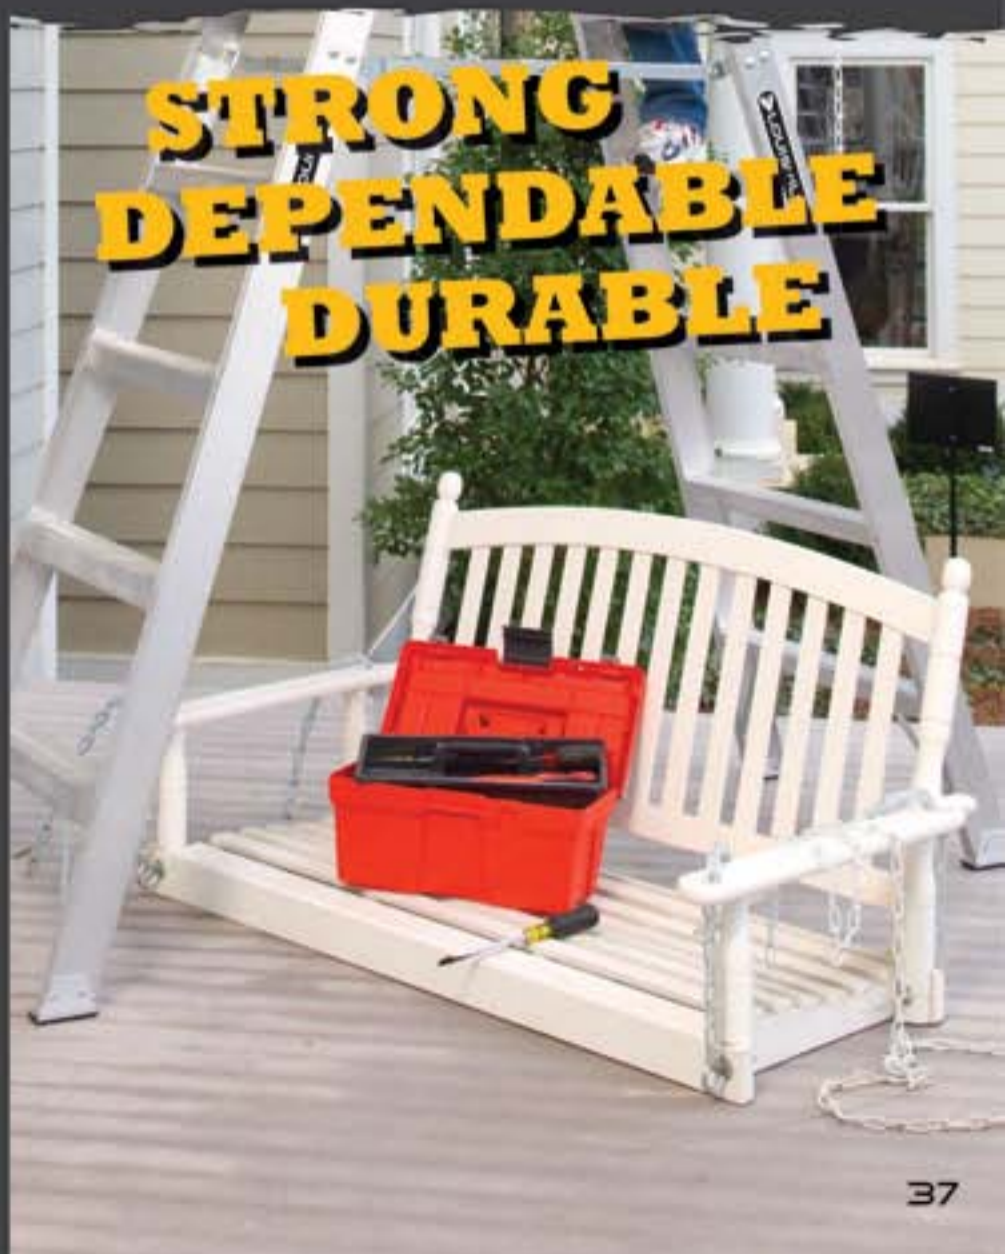

# ALUMINUM 375<sup>lb.</sup> TYPE IAA

## EXTENSION LADDER AE1200HD SERIES

# ALUMINUM 300<sup>lb.</sup> TYPE IA

## EXTENSION LADDER AE2800 SERIES



AE1220HD



AE2820

- QuickLatch®**  
Patent # 5429207
- Swivel safety shoes**
- D-shaped rungs**
- Full I-beam**
- Mar-resistant rail end caps**
- Outside slide guides**

- QuickLatch®**  
Patent # 5429207
- Swivel safety shoes**
- D-shaped rungs**
- Stacked aluminum I-beam rail**
- Mar-resistant rail end caps**
- Rubber fly section shoes**

MODEL	TOTAL LENGTH	LENGTH EA. SECTION	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
AE1216HD*	16'	8'	13'	38	7.3'
AE1220HD	20'	10'	17'	42.79	9.1'
AE1224HD	24'	12'	21'	52.03	10.7'
AE1228HD	28'	14'	25'	59.26	13.4'
AE1232HD	32'	16'	29'	73.19	15.3'
AE1236**	36'	18'	32'	81.57	17.1'
AE1240**	40'	20'	35'	90.26	19.6'
AE1248***	48'	24'	43'	122	29.1'

\*Does not include rope & pulley

\*\*300 lb. Type IA rated standard ladder.  
\*\*\*250 lb. Type I rated standard ladder.

MODEL	TOTAL LENGTH	LENGTH EA. SECTION	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
AE2816*	16'	8'	13'	32	6.3'
AE2820	20'	10'	17'	39	9.5'
AE2824	24'	12'	21'	46	11.4'
AE2828	28'	14'	25'	59	13'
AE2832	32'	16'	29'	66	15.2'
AE2836	36'	18'	32'	80	16'
AE2840	40'	20'	35'	89	16.8'

\*Does not include rope & pulley.

SIZES	RAIL DEPTH	STACK HT.	INSIDE WIDTH		OUTSIDE WIDTH	
			BASE	FLY	BASE	FLY
16'-40'	3"	5 1/4"	16 3/8"	14 3/8"	19 1/8"	16 3/8"
44'-48'	4"	6 1/2"	18"	15 1/4"	20 3/4"	18 3/4"

SIZES	RAIL DEPTH	STACK HT.	INSIDE WIDTH		OUTSIDE WIDTH	
			BASE	FLY	BASE	FLY
16'-40'	3"	6"	15 3/4"	15 3/4"	18"	18"




# ALUMINUM EXTENSION LADDER AE2000 SERIES

**300** lb. **TYPE IA** load capacity\*



AE2220

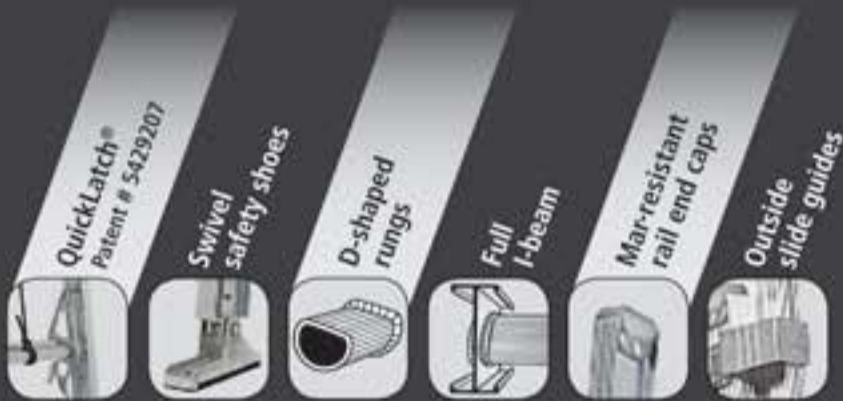

MODEL	TOTAL LENGTH	LENGTH EA. SECTION	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
AE2216*	16'	8'	13'	30	7.3'
AE2220	20'	10'	17'	37	8.8'
AE2224	24'	12'	21'	44	9'
AE2228	28'	14'	25'	56	11.8'
AE2232	32'	16'	29'	62	14.1'
AE2236	36'	18'	32'	76	16.5'
AE2240	40'	20'	35'	84	18.5'

\* Does not include rope & pulley.

## SINGLE LADDERS

MODEL	TOTAL LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
AE2108	8'	15	4.3'
AE2110	10'	18	5.9'
AE2112	12'	22	6.7'
AE2114	14'	28	7.7'
AE2116	16'	30	9.1'
AE2118	18'	38	9.4'
AE2120	20'	42	10.1'

SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE WIDTH		OUTSIDE WIDTH	
			BASE	FLY	BASE	FLY
16"-24"	3"	5 1/4"	15 3/8"	13 3/8"	17 1/8"	15 3/8"
28"-40"	3"	5 1/4"	15 3/8"	13 3/4"	18"	15 3/8"



# ALUMINUM 250 lbs. load capacity\* TYPE I

## 3-SECTION EXTENSION LADDER AE1660 SERIES



AE1660

# ALUMINUM 250 lbs. load capacity\* TYPE I

## EXTENSION LADDER AE3200 SERIES



AE3220



MODEL	TOTAL LENGTH	MAX. EXTENDED LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
AE1660	60'	48'	169	30.4'

TOTAL LENGTH	RAIL DEPTH	STACK HEIGHT	SECTION LENGTH	INSIDE WIDTH	OUTSIDE WIDTH
60'	4"	8 1/4"			
Base Section			22'	18"	21 1/2"
Center Section			20'	15 3/8"	18 13/16"
Fly Section			18'	12 1/2"	16 1/8"

MODEL	TOTAL LENGTH	LENGTH EA. SECTION	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
AE3216*	16'	8'	13'	27	6.5'
AE3220	20'	10'	17'	32	7'
AE3224	24'	12'	21'	38	8.3'
AE3228	28'	14'	25'	53	11.3'
AE3232	32'	16'	29'	60	13.2'
AE3236	36'	18'	32'	72	14.7'
AE3240	40'	20'	35'	80	15.7'

\*Does not include rope & pulley.



SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE WIDTH		OUTSIDE WIDTH	
			BASE	FLY	BASE	FLY
16-40'	3"	5 1/4"	15 1/4"	13 13/16"	17 1/2"	16 3/8"





# ALUMINUM EXTENSION LADDER AE4000 SERIES

**225** lbs. TYPE II load capacity\*



- NON-MARRING
- SLIP-RESISTANT
- HAND GRIP
- NO MORE WRAPPING YOUR LADDER IN TOWELS

AE4220PG



EXTENSION LADDERS

*ProGrip™ - Get a grip on your task!*

*QuickLatch® Patent # 5429207*

*Swivel safety shoes*

*D-shaped rungs*

*Modified I-beam*


**SINGLE LADDERS** (Do not include ProGrip™)

MODEL	TOTAL LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
AE4110	10'	17	5.1'
AE4112	12'	20	5.9'
AE4114	14'	23	7.5'
AE4116	16'	29	8.5'
AE4118	18'	31	8.7'
AE4120	20'	36	10.1'

MODEL	TOTAL LENGTH	LENGTH EA. SECTION	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
AE4216PG**	16'	8'	13'	27	6.4'
AE4220PG	20'	10'	17'	32	8.2'
AE4224PG	24'	12'	21'	38	9.6'
AE4228PG	28'	14'	25'	48	11.3'
AE4232PG	32'	16'	29'	58	12.9'
AE4236PG	36'	18'	32'	71	14.5'
AE4240PG	40'	20'	35'	80	16.3'

\*\* Does not include rope & pulley.

RAIL DEPTH	STACK HT.	INSIDE WIDTH		OUTSIDE WIDTH	
		BASE	FLY	BASE	FLY
3"	5 1/4"	15 3/4"	14 3/8"	17 3/8"	16 3/8"



# ALUMINUM

**200** lbs. TYPE III load capacity\*

## EXTENSION LADDER L-2324 SERIES



L-2324-20

# ALUMINUM

**200** lbs. TYPE III load capacity\*

## EXTENSION LADDER L-2321 SERIES



L-2321-16



MODEL	TOTAL LENGTH	LENGTH EA. SECTION	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
L-2324-16*	16'	8'	13'	21	5.6
L-2324-20	20'	10'	17'	26	7
L-2324-24	24'	12'	21'	39	8.4
L-2324-28	28'	14'	25'	41	9.9

MODEL	TOTAL LENGTH	LENGTH EA. SECTION	MAX. EXT. LENGTH	APPROX. WT. (LBS)	APPROX. CUBES
L-2321-16	16'	8'	13'	18	5.5'



Does not include rope & pulley.

\*Does not include rope & pulley.


# ALUMINUM

**200** lb. **TYPE III**  
load capacity

## EURO PLATFORM LADDER L-2346 SERIES



L-2346-04

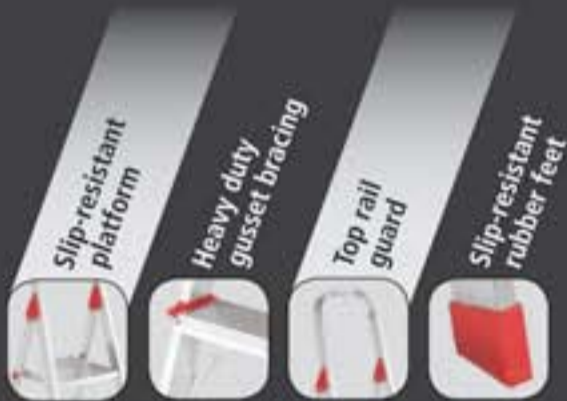

MODEL	HT. TO PLATFORM	APPROX. BASE WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
L-2346-02	2'	17 1/2"	23 1/4"	8	2
L-2346-03	3'	18 1/2"	31"	9	2.7
L-2346-04	4'	19 1/2"	38 1/4"	11	3.5



# ALUMINUM

**200** lb. **TYPE III**  
load capacity

## PLATFORM LADDER AP8000 SERIES



AP8005



MODEL	HT. TO PLATFORM	APPROX. BASE WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
AP8004	2'	19 1/2"	26 1/2"	9	2.4
AP8005	3'	20 1/2"	33 1/4"	10	3.2



STEEL

200 lbs. TYPE III load capacity

QWIK STEP® STEP STOOL L-4362 SERIES

STEEL

200 lbs. TYPE III load capacity

QWIK STEP® STEP STOOL L-4340 SERIES

STEP STOOLS



L-4362-03



L-4341-02



L-4342-02



L-4345-02



MODEL	HT. TO PLATFORM	APPROX. BASE WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
L-4362-02	1' 11"	16"	18"	10	2.6
L-4362-03	2' 10"	17"	24 1/4"	12	3.5



MODEL	COLOR	HT. TO PLTFRM.	APPROX. BASE WIDTH	APPROX. SPREAD	APPROX. WT. (LBS)	APPROX. CUBES
L-4341-02	Almond	2'	16 3/4"	19 1/2"	9.2	1
L-4342-02	Black	2'	16 3/4"	19 1/2"	9.2	1
L-4345-02	White	2'	16 3/4"	19 1/2"	9.2	1



# ALUMINUM

**350** lbs. load capacity\*


## ATTIC LADDER ELITE SERIES

# ALUMINUM


**350** lbs. load capacity\*

## ATTIC LADDER EVEREST SERIES

ATTIC LADDERS

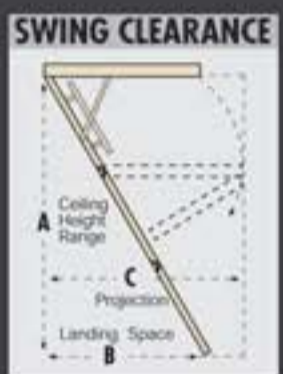

Rail size - 3 1/4"

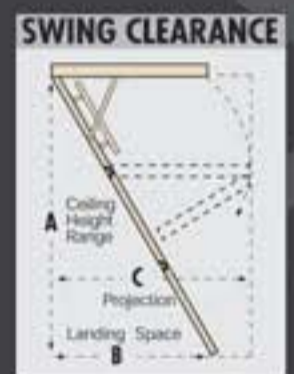

Rail size - 3 1/4"

- Advanced cylinder design
- Adjustable shoes
- Heavy duty hinges
- Insulated door
- EZ-hang strap
- 3 1/4" deep steps

MODEL	DIMENSIONS ROUGH OPEN CEILING	(A) FITS CEILING HEIGHTS		(B) APPROX. LANDING SPACE	(C) APPROX. PROJECT WIDTH	APPROX. WT. (LBS)	APPROX. CUBES
		MIN.	MAX.				
AA229GS	22 1/2" x 54"	7'9"	10'	72"	76"	55	8.5'
AA259GS	25 1/2" x 54"	7'9"	10'	72"	76"	58	9.5'



- Adjustable shoes
- Heavy duty hinges
- Angle bracing
- Insulated door
- EZ-hang strap
- 3 1/4" deep steps

MODEL	DIMENSIONS ROUGH OPEN CEILING	(A) FITS CEILING HEIGHTS		(B) APPROX. LANDING SPACE	(C) APPROX. PROJECT WIDTH	APPROX. WT. (LBS)	APPROX. CUBES
		MIN.	MAX.				
AL258P	25 1/2" x 63"	10'	12'	85"	87"	67	11.9'



# WOOD

**350** lbs. load capacity\*


## ATTIC LADDER BIG BOY SERIES

# WOOD


**300** lbs. load capacity\*

## ATTIC LADDER CHAMPION SERIES

ATTIC LADDERS

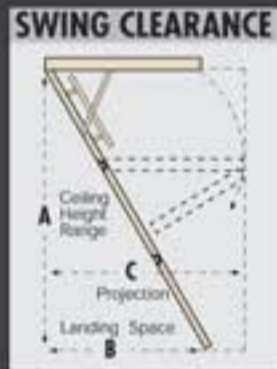

Rail size - 3/4" x 4 7/8"

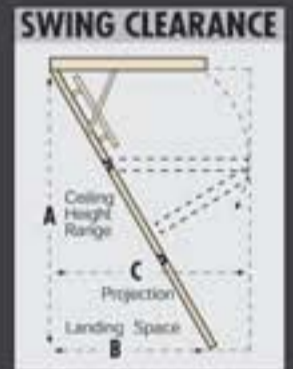

Rail size - 3/4" x 4 7/8"



MODEL	DIMENSIONS ROUGH OPEN CEILING	(A) FITS CEILING HEIGHTS		(B) APPROX. LANDING SPACE	(C) APPROX. PROJECT WIDTH	APPROX. WT. (LBS)	APPROX. CUBES
		MIN.	MAX.				
S305P	30" x 60"	7'	8'9"	63"	66"	75	15'
L305P	30" x 60"	8'9"	10'	71"	75"	82	15'

**ANSI**  
Meets or exceeds requirements  
of American National Standards Institute  
**ANSI A14.9**

MODEL	DIMENSIONS ROUGH OPEN CEILING	(A) FITS CEILING HEIGHTS		(B) APPROX. LANDING SPACE	(C) APPROX. PROJECT WIDTH	APPROX. WT. (LBS)	APPROX. CUBES
		MIN.	MAX.				
CS224P	22 1/2" x 54"	7'	8'9"	63"	66"	64	8.5'
CL224P	22 1/2" x 54"	8'9"	10'	71"	75"	70	8.5'
CS254P	25 1/2" x 54"	7'	8'9"	63"	66"	65	9.5'
CL254P	25 1/2" x 54"	8'9"	10'	71"	75"	71	9.5'
CS224I	22 1/2" x 54"	7'	8'9"	63"	66"	64	8.5'
CL224I	22 1/2" x 54"	8'9"	10'	71"	75"	70	8.5'
CS254I	25 1/2" x 54"	7'	8'9"	63"	66"	65	9.5'
CL254I	25 1/2" x 54"	8'9"	10'	71"	75"	71	9.5'


**ANSI**  
Meets or exceeds requirements  
of American National Standards Institute  
**ANSI A14.9**

P = standard option without insulation / I = insulated door.

# WOOD

**250** lbs. load capacity\*

## ATTIC LADDER PREMIUM SERIES

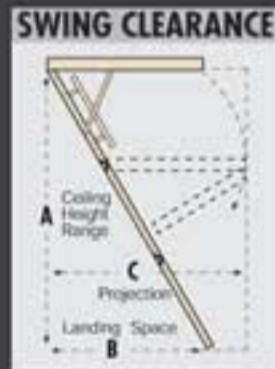

Rail size - 3/4" x 3 3/8"

# FIBERGLASS

**300** lbs. load capacity\* **TYPE IA**

## SAFEGUARD™ MOBILE MAINTENANCE PLATFORM FW SERIES



STANDARD EASY-TURN DESIGN ON 7-15 STEP LADDERS!

FW2408



MODEL	DIMENSIONS ROUGH OPEN CEILING	(A) FITS CEILING HEIGHTS		(B) APPROX. LANDING SPACE	(C) APPROX. PROJECT WIDTH	APPROX. WT. (LBS)	APPROX. CUBES
		MIN.	MAX.				
S224P	22 1/2" x 54"	7'	8'9"	63"	66"	53	8.5'
L224P	22 1/2" x 54"	8'9"	10'	71"	75"	57	8.5'
S254P	25 1/2" x 54"	7'	8'9"	63"	66"	56	9.5'
L254P	25 1/2" x 54"	8'9"	10'	71"	75"	58	9.5'

**ANSI**  
Meets or exceeds requirements  
of American National Standards Institute  
ANSI A14.9



FW2400 SERIES: 24" x 17" PLATFORM.

MODEL	LADDER SIZE	HT. TO TOP STEP	MAX. LENGTH	MAX. WIDTH	MAX. HT. w/ RAILS	SHIP. WT. (LBS)	APPROX. CUBES
FW2404	4'	3' 2 1/2"	54 3/4"	32 3/8"	6' 8 1/2"	159	18'
FW2406	6'	4' 9 1/2"	71 7/8"	32 3/8"	8' 3 1/2"	189	21'
FW2408	8'	6' 4 1/2"	89"	32 3/8"	9' 10 1/2"	258	28'
FW2410	10'	7' 11 1/2"	106 1/4"	32 3/8"	11' 5 1/2"	404	60'
FW2412	12'	9' 6 1/2"	123 1/4"	36 3/8"	13' 1/2"	440	71'
FW2414	14'	11' 1 1/2"	140 1/4"	39 1/2"	14' 7 1/2"	530	83'
FW2415	15'	11' 11"	148 1/8"	39 1/2"	15' 5"	545	89'



**ANSI**  
Meets or exceeds requirements  
of American National Standards Institute  
ANSI A14.7

An optional outrigger is also available for compliance with local code.  
6-15 step (328000B)

**STEEL** **450** lbs. load capacity\*

**ROLLING WAREHOUSE LADDER GSW SERIES**



GSW2408



GSW1601A-W04



GSW1600 SERIES: 16" x 10" PLATFORM | GSW2400 SERIES: 24" x 10" PLATFORM

MODEL	STEPS	STEP WIDTH	HT. TO PLATFORM	OVERALL HEIGHT	OVERALL DEPTH	OVERALL WIDTH	APPROX. CUBES	APPROX. WT. (LBS)
<b>NO HANDRAILS</b>								
GSW1601A-W04	1	16"	12"	12"	17"	19"	1.9	16
GSW1602	2	16"	20"	20"	19"	20"	3.4	25
GSW2402	2	24"	20"	20"	19"	28"	8.1	30
GSW2403	3	24"	30"	30"	27"	28"	8.1	41
GSW1604	4	16"	40"	40"	35"	23"	8.3	47
GSW2404	4	24"	40"	40"	35"	31"	10.4	55


<b>HANDRAILS</b>								
GSW1603A-W03	3	16"	30"	66"	27"	20"	5	46
GSW2403-W03	3	24"	30"	66"	27"	28"	8.1	56
GSW1604-W03	4	16"	40"	76"	35"	23"	8.3	58
GSW2404-W03	4	24"	40"	76"	35"	31"	10.4	66
GSW1605	5	16"	50"	86"	42"	23"	10.1	67
GSW2405	5	24"	50"	86"	42"	31"	12.6	79
GSW2406	6	24"	60"	96"	50"	34"	14.9	109
GSW2407	7	24"	70"	106"	57"	34"	17.2	121
GSW2408	8	24"	80"	116"	63"	34"	19.4	151
GSW2409	9	24"	90"	126"	70"	34"	21.7	170
GSW2410	10	24"	100"	136"	77"	34"	23.9	198
GSW2411	11	24"	110"	146"	83"	34"	26.2	214
GSW2412	12	24"	120"	156"	90"	34"	28.5	228
GSW2413	13	24"	130"	166"	97"	39"	30.7	289
GSW2414	14	24"	140"	176"	104"	39"	33	298
GSW2415	15	24"	150"	186"	110"	39"	35.2	311

**ACCESSORIES & OPTIONS**

- ▣ **EXTRA DEEP TOP**  
(16" & 24" wide models)  
ACCESSORY #W01 (adds 10" for a total of 20")  
ACCESSORY #W02 (adds 20" for a total of 30")
- ▣ **SPRING LOADED CASTERS\***
- ▣ **HANDRAIL & GUARDRAIL**  
ACCESSORY #W03
- ▣ **HANDRAIL & OUTRIGGER**

**HANDRAIL & OUTRIGGER (ACCESSORY)**  
Mandatory when local codes require 3:1 height to base ratio

5 Step (16" Wide Only)	GRCAL0SEC-B
5-9 Step	GRCAL0509-B
10-12 Step	GRCAL1012-B
13-15 Step	GRCAL1315-B



\*Spring loaded casters available for 1-5 step models only.  
\*\*Toeboard only available on models GSW2412 and up.



# HEAVY DUTY STEEL **450** lb. load capacity\*

WAREHOUSE LADDER GSX2400 SERIES

# HEAVY DUTY STEEL **450** lb. load capacity\*

WAREHOUSE LADDER GSX1600 SERIES

WAREHOUSE LADDERS



SHOWN WITH  
EASY-TURN  
DESIGN!  
(option #X09)



GSX1603

This super heavy duty ladder is constructed for the most demanding requirements, yet it is only 16" wide—the number one choice for narrow spaced industrial applications.

- Forward descent**
- Tubular construction**
- Wide steps**
- Handrail & guardrail**
- Bottom landing step**
- Non marring/markings casters**


GSX2400 SERIES: 24" x 17" PLATFORM.

MODEL	STEPS	STEP WIDTH	HT. TO PLTFRM.	OVER ALL HEIGHT	OVER ALL DEPTH	OVER ALL WIDTH	APPROX. CUBES	APPROX. WT. (LBS)
GSX2404	4	24"	40"	76"	49"	28"	14.6	113
GSX2405	5	24"	50"	86"	58"	28"	17.2	126
GSX2406	6	24"	60"	96"	66"	34"	19.8	146
GSX2407	7	24"	70"	106"	74"	34"	22.4	159
GSX2408	8	24"	80"	116"	82"	34"	25	200
GSX2409	9	24"	90"	126"	91"	34"	27.6	232
GSX2410	10	24"	100"	136"	99"	34"	30.2	248
GSX2411	11	24"	110"	146"	107"	34"	32.8	264
GSX2412	12	24"	120"	156"	116"	34"	35.4	280
GSX2413	13	24"	130"	166"	124"	39"	38	356
GSX2414	14	24"	140"	176"	133"	39"	40.6	369
GSX2415	15	24"	150"	186"	141"	39"	43.3	392

- Forward descent**
- Tubular construction**
- Non marring/markings casters**
- Bottom landing step**

GSX1600 SERIES: 16" x 17" PLATFORM.

MODEL	STEPS	STEP WIDTH	HT. TO PLTFRM.	OVER ALL HEIGHT	OVER ALL DEPTH	OVER ALL WIDTH	APPROX. CUBES	APPROX. WT. (LBS)
GSX1603	3	16"	30"	66"	41"	27"	9.6'	75
GSX1604	4	16"	40"	76"	49"	27"	11.7'	91
GSX1605	5	16"	50"	86"	58"	27"	13.8'	104
GSX1606	6	16"	60"	96"	66"	27"	15.8'	118
GSX1607	7	16"	70"	106"	74"	27"	17.9'	132



### HANDRAIL & OUTRIGGER (ACCESSORY)

Mandatory when local codes require 3:1 height to base ratio

- 3-7 Step (16" wide only) GRCA05EC-0
- 4-9 Step GECAL0509-0
- 10-12 Step GRCA1012-0
- 13-15 Step GRCA1315-0



CONSULT LEAD TIMES WITH A CUSTOMER SERVICE REPRESENTATIVE FOR THE PRODUCTS ON THIS PAGE

# STEEL 1,000 lbs.

## ROLLING TOWER SCAFFOLDS ST SERIES

**ONE-PERSON ASSEMBLY!**



ST0606A



12' TOWER

**Fits through 30° door frame**

**Locking pins prevent accidental unlocking**

**Deck pin secures platform**

MODEL	SIZE (HxL)	APPROX. WT. (LBS)	APPROX. CUBES
ST0306A*	3' x 6'	115	7.3'
ST0606A	6' x 6'	132	7.3'



\*Does not include casters.

**END-FRAMES:**

Full height unit 29" wide x 65" high (without casters)  
 Half unit 29" wide x 35 1/2" high (without casters)

**WIDTH (ASSEMBLED):**

29 1/2" with casters  
 66 3/4" with outriggers & casters

**PLATFORM:**

Exterior grade, edge protected  
 3/8" thick plywood  
 6' unit – 28.75" wide x 67" long

**PLATFORM HEIGHT (MAX) (with casters):**

6' unit – 6' 0"  
 12' unit – 11' 5"  
 15' unit – 14' 5"

**HEIGHT OF HANDRAIL: 39"**

**TO MAKE THE 12' TOWER, YOU NEED:**

- (2) ST0606A - 6' Scaffold
- (1) PK735A - Outriggers (4/box)\*
- (1) PK736A - Handrail (1/box)\*

**TO MAKE THE 15' TOWER, YOU NEED:**

- (2) ST0606A - 6' Scaffold
- (1) PK735A - Outriggers (4/box)\*
- (1) PK736A - Handrail (1/box)\*
- (1) ST0306A - 3' Scaffold

\*Outriggers and handrail sold separately. Do not stack higher than (2) 6' units and (1) 3' unit totaling 15'. Each set of end frames requires 1 pair of trusses & platform.

# MINI FORTRUSS® 500 lbs.

MOBILE WORK STAND SM SERIES



Patent #5,555,954

*Folds flat for easy storage*

*Great for painting and decorating projects*

*Sturdy workbench*

*Individual platform can be used at different levels*



**ADJUSTABLE HEIGHT:**

The working height can be adjusted to 12", 24", 36", & 48".


**AMPLE WORK CAPACITY:**

Provides a large 17" x 43" work surface, along with 500 lbs. distributed load work capacity.

**END FRAME STOPS:**

Exclusive non-pinching stops limit rotation of end frame to 90°.

MODEL	CASTERS	APPROX. WT. (LBS)	OVERALL LENGTH WITH CASTERS	OVERALL HT. WITH CASTERS	OVERALL WIDTH	FOLDED UNIT WIDTH	PLANK WIDTH	PLANK LENGTH
SM1404A	4	68	47 1/2"	50 3/4"	22 1/2"	6 3/4"	8.5 (2), 17 overall	46 3/4"



# SCAF-A-DECK PD9000 SERIES


# SCAF-A-DECK PD8000 SERIES

PLANKS



Safety latch

Solid bolt construction

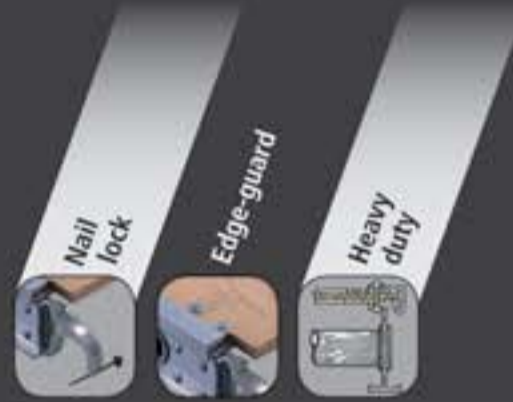

Nail lock

Edge-guard

Heavy duty

MODEL	PLANK LENGTH	WIDTH	RAIL SIZE	CAPACITY (LBS/SQ.FT.)	APPROX. WT. (LBS)
PD9007	7'	18 3/4"	2"	75	33
PD9008	8'	18 3/4"	2"	75	36
PD9010	10'	18 3/4"	2"	50	42

MODEL	PLANK LENGTH	WIDTH	RAIL SIZE	CAPACITY (LBS/SQ.FT.)	APPROX. WT. (LBS)
PD8007	7'	19"	3"	75	27
PD8008	8'	19"	3"	75	32
PD8010	10'	19"	3"	50	35

## MEDIUM-DUTY TELESCOPING PLANK LP-2921 SERIES

## SCAFFOLD PLANKS & STAGE PLATFORMS P SERIES



MODEL	PLANK LENGTH	STANDARD EXTENSION	WIDTH	APPROX. WT. (LBS)
LP-2921-09A	9'	6'0" - 9'0"	12"	30
LP-2921-13A	13'	8'0" - 13'0"	12"	39
LP-2921-16A	16'	10'0" - 16'0"	12"	50



Molded ergonomic handles

Easy grip rungs


Reinforcing web braces

Slip-resistant decking

Optional modular handrail systems

The LadderPro™ medium-duty telescoping plank is available in 9', 13', and 16' sizes (fully extended). The plank is manufactured with heavy wall aluminum tubing to prevent the twisting and flexing common to most other planks. The built-in, skid-resistant surface reduces slips. It stores and transports in approximately half of its fully extended length. The telescoping plank has the strength to do the job safely, and the compactness to store easily after the work is done. 250 lb. rated.

P1, P2 AND P3 SERIES AVAILABLE. SEE THE FOLLOWING PAGE FOR DETAILS.



LOUISVILLE  
LADDERS TRUSTED BY THE PROS FOR OVER 85 YEARS

# 1-PERSON DECORATOR PLANK 250 LB. WORKING LOAD P1 SERIES



SIZE	SIDE RAIL DEPTH	12" WIDE MODEL	APPROX. WT. (LBS)	14" WIDE MODEL	APPROX. WT. (LBS)	20" WIDE MODEL	APPROX. WT. (LBS)
8'	4"	P11208	27	P11408	29	P12008	36
16'	4"	P11216	51	P11416	53	P12016	62
20'	5"	P11220	76	P11420	78	P12020	88
24'	5"	P11224	88	P11424	90	P12024	100


\*Full length decking.

# 2-PERSON SCAFFOLD PLANK & STAGE 500 LB. WORKING LOAD P2 SERIES



SIZE	SIDE RAIL DEPTH	12" WIDE MODEL	APPROX. WT. (LBS)	14" WIDE MODEL	APPROX. WT. (LBS)	20" WIDE MODEL	APPROX. WT. (LBS)	24" WIDE MODEL	APPROX. WT. (LBS)	28" WIDE MODEL	APPROX. WT. (LBS)
5'	4"	-	-	-	-	-	-	-	-	P22805	26
6'	4"	P21206	15	-	-	-	-	-	-	P22806	31
12'	4"	P21212	41	P21412	45	P22012	52	P22412	57	P22812	60
14'	5"	-	-	-	-	-	-	-	-	P22814	76
16'	5"	P21216	60	P21416	65	P22016	69	P22416	81	P22816	85
20'	6"	P21220	97	P21420	103	P22020	115	P22420	124	P22820	129
24'	6"	P21224	112	P21424	118	P22024	133	P22424	142	P22824	151
28'	6"	P21228	142	P21428	149	P22028	166	P22428	176	P22828	185
30'	6"	-	-	-	-	-	-	-	-	P22830	199
32'	6"	P21232	160	P21432	167	P22032	181	P22432	197	P22832	213

# 3-PERSON STAGE PLATFORM 750 LB. WORKING LOAD P3 SERIES

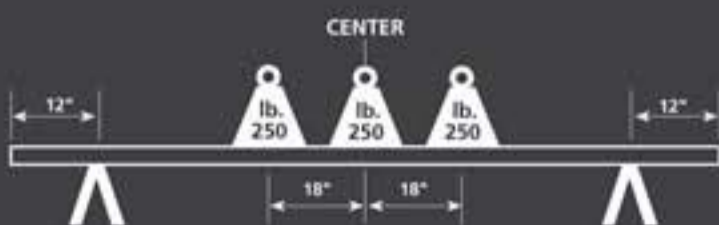

SIZE	SIDE RAIL DEPTH	20" WIDE MODEL	APPROX. WT. (LBS)	24" WIDE MODEL	APPROX. WT. (LBS)	28" WIDE MODEL	APPROX. WT. (LBS)
16'	6"	P32016	87	P32416	101	P32816	111
20'	6"	P32020	119	P32420	133	P32820	139
24'	6"	P32024	135	P32424	149	P32824	163
28'	7"	P32028	217	P32428	225	P32828	239
32'	7"	-	-	P32432	252	P32832	275
40'	7"	-	-	-	-	P32840	367

# MODULAR GUARDRAIL SYSTEMS

FOR PLANKS & STAGES



### PRODUCT WEIGHTS

ITEM	APPROX. WT. (LBS)
MPT-01	0.56
MGR-09	2.31
MGR-13	3.33
MTB-09	2.38
MTB-13	3.44
MRF-01	1.13
MER-01	2.00
MER-02	2.84



RAIL END CAPS	MODEL	APPROX. WT. (LBS)
Caps for 4" Rail	PK740A	0.65 Ea.
Caps for 5" Rail	PK740B	0.80 Ea.
Caps for 6" Rail	PK740C	1.07 Ea.
(2 end caps & hardware per kit)		



RAIL END CAPS	MODEL	APPROX. WT. (LBS)
Caps for 7" Rail	PR064226	0.8 Ea.



### PT SERIES GUARDRAIL



HANDRAIL SOCKET WITH HARDWARE	MODEL	APPROX. WT. (LBS)
3" Handrail socket w/ hardware	PR098004C	1

SINGLE SIDED SYSTEM*						
PLANK LENGTH	GUARDRAIL POST ASSEMBLY	9' GUARDRAIL LENGTH	13' GUARDRAIL LENGTH	9' TOEBOARD LENGTH	13' TOEBOARD LENGTH	WEB BRACE ASSEMBLY**
	MPT-01	MGR-09	MGR-13	MTB-09	MTB-13	MRF-01
5'	2	2	0	1	0	2
6'	2	2	0	1	0	2
8'	2	2	0	1	0	2
10'	2	0	2	0	1	2
12'	3	0	2	0	1	3
14'	3	0	2	0	1	3
16'	3	4	0	2	0	3
18'	3	0	4	0	2	3
20'	4	6	0	3	0	4
24'	4	6	0	3	0	4
28'	5	4	2	2	1	0
30'	5	8	0	4	0	0
32'	5	4	4	2	2	0
36'	6	10	0	5	0	0
40'	6	6	4	3	2	0

\*Double all quantities, except for web brace assembly, for two-sided systems.

THREE SIDED SYSTEM							
PLANK LENGTH	GUARDRAIL POST ASSEMBLY	9' GUARDRAIL LENGTH	13' GUARDRAIL LENGTH	9' TOEBOARD LENGTH	13' TOEBOARD LENGTH	WEB BRACE ASSEMBLY**	ENDRAIL ASSEMBLY
	MPT-01	MGR-09	MGR-13	MTB-09	MTB-13	MRF-01	MER-01/ MER-02*
5'	4	2	0	1	0	2	2
6'	4	2	0	1	0	2	2
8'	4	2	0	1	0	2	2
10'	4	0	2	0	1	2	2
12'	5	0	2	0	1	3	2
14'	5	0	2	0	1	3	2
16'	5	4	0	2	0	3	2
18'	5	0	4	0	2	3	2
20'	6	6	0	3	0	4	2
24'	6	6	0	3	0	4	2
28'	7	4	2	2	1	0	2
30'	7	8	0	4	0	0	2
32'	7	4	4	2	2	0	2
36'	8	10	0	5	0	0	2
40'	8	6	4	3	2	0	2

FOUR SIDED SYSTEM							
PLANK LENGTH	GUARDRAIL POST ASSEMBLY	9' GUARDRAIL LENGTH	13' GUARDRAIL LENGTH	9' TOEBOARD LENGTH	13' TOEBOARD LENGTH	WEB BRACE ASSEMBLY**	ENDRAIL ASSEMBLY
	MPT-01	MGR-09	MGR-13	MTB-09	MTB-13	MRF-01	MER-01/ MER-02*
5'	4	4	0	2	0	2	2
6'	4	4	0	2	0	2	2
8'	4	4	0	2	0	2	2
10'	4	0	4	0	2	2	2
12'	6	0	2	0	2	3	2
14'	6	0	4	0	2	3	2
16'	6	8	0	4	0	3	2
18'	6	0	8	0	4	3	2
20'	8	12	0	6	0	4	2
24'	8	12	0	6	0	4	2
28'	10	8	4	4	2	0	2
30'	10	16	0	8	0	0	2
32'	10	8	8	4	4	0	2
36'	12	20	0	10	0	0	2
40'	12	12	8	6	4	0	2

\*MER-01 required on 12" and 14" wide planks. MER-02 required on 20", 24" and 28" wide planks. \*\*Required on planks with side rails LESS than 6" tall

# MERCHANDISER

## SRA9 LADDER RACK



LOUISVILLE LADDER'S SRA9 LADDER RACK MERCHANDISER DESIGNED SPECIFICALLY TO INCREASE LADDER SALES.

- Holds 7 ladders
- Accessory tray
- Easy to assemble
- 3.83' x 2.16' footprint

*Ladders and accessories not included.*

# LOGO LOCK SYSTEM

## FOR FIBERGLASS LADDERS



- Promote your customer's name with the LogoLock™ system
- Deter theft by displaying your logo
- Customize the image of your ladders
- Long-lasting image embedded into the fiberglass rail

LogoLock™ Patent #7,095,428

**CONTACT YOUR LOUISVILLE LADDER SALES REPRESENTATIVE FOR MORE INFORMATION!**

### DETAILS

- Each ladder will have one custom logo applied to each side rail (Dimension of logo should be a maximum of 7 1/16" x 2 3/8")
- One time setup fee for each logo
- Artwork must be provided in either ".jpg" or ".tif" format with a minimum 300 dpi (dots per inch) resolution

**REPLACEMENT PARTS  
AVAILABLE ONLINE**

Please visit our website and click "Online Store" from the top menu.

**WWW.LOUISVILLELADDER.COM**

# EXTENSION LADDER ACCESSORIES

For availability, please contact Customer Service. Please specify ladder size and ladder model. To order factory-mount accessories, add the 3-digit accessory number and size. (EXAMPLE: FE3220-E05, 20' Fiberglass Extension with Web Pole Grip)

	FE3200	FE7000	FE1700	FE0600	FE4000HD	AE1200HD	AE2800	AE2000	AE1660	AE3200	AE4000
 <b>ACCESSORY #E03</b> COMBINATION POLE GRIP & CABLE HOOK	✓	✓	✓	✓	✓						
 <b>ACCESSORY #E04</b> RIGID POLE GRIP	✓	✓	✓	✓	✓						
 <b>ACCESSORY #E05</b> WEB POLE GRIP	✓	✓	✓	✓	✓						
 <b>ACCESSORY #E11</b> LADDER LASH	✓	✓	✓	✓	✓						
 <b>ACCESSORY #E30</b> WHEEL SPURS	✓	✓	✓	✓	✓						
 <b>ACCESSORY #E34</b> AUTO. ADJUSTING LEVELER (FACTORY MOUNT)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
 <b>ACCESSORY #091006C</b> AUTO. ADJUSTING LEVELER (FIELD MOUNT)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
 <b>ACCESSORY #E38</b> COMBINATION SPUR & SHOE	✓	✓	✓	✓	✓						
 <b>ACCESSORY #E55</b> FRONT-MOUNTED PULLEY	✓	✓*			✓						
 <b>MODEL #PK709</b> (5 pairs per carton) PROGRIP™ ACCESSORY										✓	✓
 <b>MODEL #LP-2200-00</b> LADDER STABILIZER	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
 <b>MODEL #LP-2210-00</b> ADJUSTABLE STABILIZER	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
 <b>MODEL #LP-5510-00</b> PRO-GUARDS™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
 <b>MODEL #LP-2100-23</b> LADDER JACK SHORT BODY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
 <b>MODEL #LP-2100-13</b> LADDER JACK LONG BODY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
 <b>MODEL #LP-2300-00</b> LADDER LEVELER	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓
 <b>MODEL #LP-2220-01</b> KEYLOK® QUICK CONNECT SYSTEM 	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓

\*Only fits 16' - 32' models



## EXTENSION LADDERS FIBERGLASS & ALUMINUM



### COMBINATION POLE GRIP & CABLE HOOK (FIBERGLASS ONLY)

FACTORY: E03

FIELD: PK-E03A (16'-28') (APPROX. WT. 3 LBS)

PK-E03B (32'-40') (APPROX. WT. 3 LBS)

A rigid steel-plated V-shaped pole grip covered with rubber tread, combined with cable hook assembly.



### RIGID POLE GRIP (FIBERGLASS ONLY)

FACTORY: E04

FIELD: PK-E04A (16'-28') (APPROX. WT. 1.9 LBS)

PK-E04B (32'-40') (APPROX. WT. 1.7 LBS)

$\frac{3}{16}$ " x 1" steel-plated bar formed into a "V" shape and covered with heavy rubber tread makes an ideal pole grip and can be added to ladders already in service.



### WEB POLE GRIP (FIBERGLASS ONLY, 16'-40')

FACTORY: E05

FIELD: PK-E05R (APPROX. WT. 0.7 LBS)

Made of flexible high strength nylon webbing with a 5" section of corrugated rubber tread. Helps to hold top of ladder against poles, pipes or corners.



### LADDER LASH (FIBERGLASS ONLY, 16'-40')

FACTORY: E11

FIELD: PK-E11R (APPROX. WT. 1.1 LBS)

Lash for wrapping around objects up to 17" in diameter. Made of 2" Dacron webbing with forged steel snaps and a quick adjustment with clip.



### WHEEL SPURS (FIBERGLASS ONLY, 16'-28')

FACTORY: E30

FIELD: PK-E30A (APPROX. WT. 0.9 LBS)

Wheel spurs are available as an alternative to our standard cast swivel safety shoe.



### AUTOMATIC-ADJUSTING LEVELER

FACTORY: E34

FIELD: PR091006C (APPROX. WT. 6.3 LBS)

Leveler keeps ladder stabilized in perpendicular position on uneven terrain. Adjustable up to a 9" height differential.



### COMBINATION SPUR & SHOE (FIBERGLASS ONLY)

FACTORY ONLY: E38

This accessory allows the use of either a spur or a shoe with thick rubber tread.



### FRONT-MOUNTED PULLEY (FIBERGLASS ONLY)

FACTORY ONLY: E55

Large diameter pulley sheave assembly mounted between slide guides allows fly section to be extended and lowered from front side of ladder.



### PROGRIP™ ACCESSORY

FIELD ONLY: PK709 (5 pairs per carton)

Slip-resistant design that easily replace your ladder's current endcaps. They protect the support surface from damage while including easy-carry hand grips.



### LADDER STABILIZER

MODEL #LP-2200-00 (APPROX. WT. 6 LBS)

Fits extension and single ladders with rail up to 4" x 1  $\frac{3}{4}$ ". Holds ladder 12" from wall and spans 48" to clear most windows. Stabilizers attach with 2 U-bolts and feature replaceable extra heavy duty rubber tips.



### ADJUSTABLE STABILIZER

MODEL #LP-2210-00 (APPROX. WT. 6 LBS)

Fits extension and single ladders with rail up to 4" x 1  $\frac{3}{4}$ ". Aluminum bracket with vertical adjustments hold ladder from 13" to 25" from wall and spans 48" to clear most windows. Stabilizers attach with 2 U-bolts and feature replaceable extra heavy duty rubber tips.



### PRO-GUARDS™ **NEW DESIGN!**

MODEL #LP-5510-00 (APPROX. WT. 1.4 LBS)

Pro-Guards™ fit most fiberglass and aluminum extension and single ladders. Protect your work surface with Pro-Guards™. Patent #6,499,563 B1



### LADDER JACK (SHORT BODY)

MODEL #LP-2100-23 (APPROX. WT. 14 LBS)

Short body ladder jacks (1 pair) span 2 extension ladder rungs. Holds planks and stages up to 20" wide, features six pitch adjustments and folds for easy storage. Manufactured for use with Type IAA, IA, and I fiberglass and aluminum extension ladders.



### LADDER JACK (LONG BODY)

MODEL #LP-2100-13 (APPROX. WT. 16 LBS)

Long body ladder jacks (1 pair) span 3 extension ladder rungs. Holds planks and stages up to 20" wide, features six pitch adjustments and folds for easy storage. Manufactured for use with Type IAA, IA, and I fiberglass and aluminum extension ladders.



### LADDER LEVELER

MODEL #LP-2300-00 (APPROX. WT. 8 LBS)

Ideal for using on extension or straight ladders on uneven surfaces. Attaches easily to Type IAA, IA, I, and II fiberglass and aluminum extension or single ladders. Features steel-plated construction and a safety guard to protect from accidental release. The ladder leveler has a maximum differential of 15".



### KEYLOK® QUICK CONNECT SYSTEM LOUISVILLE LADDER LEVELER BY LEVELOK®

MODEL #LP-2220-01 (APPROX. WT. 8 LBS)

The Levelok® is one of the easiest to use ladder levelers in the market. It can be installed on almost any fiberglass or aluminum extension ladder, and can be operated using only your foot - freeing your hands to hold the ladder.

**Levelok®**

Ladder Stabilizer and Leveler

STEPLADDER  
ACCESSORY



### PAIL SHELF (CERTAIN MODELS)

MODEL #LP-2400-00 (UNIVERSAL) (APPROX. WT. 1.5 LBS)

FITS ALL LOUISVILLE / DAVIDSON BRAND STEPLADDERS. DETAILED INSTRUCTIONS AND SUPPLIED HARDWARE MAKE INSTALLATION EASY.



**C.L.I.M.B.  
ACADEMY**

## THE C.L.I.M.B. ACADEMY® SAFETY TRAINING PROGRAM FROM LOUISVILLE LADDER, INC.

Louisville's NEW C.L.I.M.B. Academy® teaches fundamental principles when using:

**Stepladders, extension ladders, rolling warehouse ladders, rolling tower scaffolding, and aluminum walk boards.**

The C.L.I.M.B. Academy® (C.L.I.M.B.) teaches you to **C**hoose the right equipment, **L**ook for damage or missing parts, **I**nsure a safe setup, and **M**ove safely always using 3 points of contact. We encourage everyone to **B**e a climbing equipment safety expert, not a statistic!

C.L.I.M.B. ACADEMY® SAFETY TRAINING PROGRAM includes:

- Combined Facilitator & Student Handbook
- DVD
- Editable C.L.I.M.B. Certificate PDF
- Other bonus materials accessible via PC/MAC



Order kits or replacement handbooks online at [WWW.LOUISVILLELADDER.COM](http://WWW.LOUISVILLELADDER.COM)  
Train online at [WWW.CLIMBACADEMY.COM](http://WWW.CLIMBACADEMY.COM)

### TERMS AND CONDITIONS OF SALE

Louisville Ladder, Inc. is herein referred to as the "Seller" and the customer or person or entity purchasing goods ("Goods") from Seller is referred to as the "Buyer". These Terms and Conditions, any quotation or acknowledgment from Seller relevant to the sale of the Goods and all documents incorporated by specific reference therein, constitute the complete and exclusive statement of the terms of the agreement governing the sale of Goods by Seller to Buyer. Any other language proposed by Buyer, including Buyer's Purchase Order language shall not control over these Terms. Buyer's acceptance of the Goods will manifest Buyer's assent to these Terms and Conditions.

- 1. PRICES:** All prices are exclusive of taxes, transportation and insurance, which are to be borne by Buyer.
- 2. TAXES:** Any tax or governmental charge affecting Seller's costs of production, sale, or delivery shall be for Buyer's account and shall be added to the price.
- 3. TERMS OF PAYMENT:** Unless otherwise specified by Seller, terms are 1% km (10), net thirty (30) days from date of Seller's invoice in U.S. currency. Seller shall have the right, among other remedies, either to terminate this agreement or to suspend further performance under this and/or other agreements with Buyer in the event Buyer fails to make any payment when due. Buyer shall be liable for all expenses, including attorneys' fees, relating to the collection of past due amounts. Should Buyer's financial responsibility become unsatisfactory to Seller, cash payments or security satisfactory to Seller may be required by Seller for future deliveries and for the Goods theretofore delivered.
- 4. FREIGHT POLICY:** Freight prepaid on shipments to one destination within the continental U.S. that total 1000 pounds or more of fiberglass and/or aluminum products or 1000 pounds of any combination including wood and steel.
- 5. SHIPMENT AND DELIVERY:** Deliveries are made F.O.B. Seller's shipping point. Risk of loss or damage and responsibility shall pass from Seller to Buyer upon delivery. Any claims for shortages or damages suffered in transit shall be submitted by the Buyer directly to the carrier. While Seller will use all reasonable commercial efforts to maintain the delivery date(s) acknowledged or quoted by Seller, all shipping dates are approximate and not guaranteed. Seller reserves the right to make partial shipments. Seller, at its option, shall not be bound to tender delivery of any Goods for which Buyer has not provided shipping instructions. If the shipment of the Goods is postponed or delayed by Buyer for any reason, Buyer agrees to reimburse Seller for any and all storage costs and other additional expenses resulting therefrom.
- 6. LIMITED WARRANTY:** Subject to the limitations of Section 7, Seller warrants that the Goods manufactured by Seller will be free from defects in material and under normal use and regular service and maintenance for a period of one year from the date of shipment of the Goods by Seller, unless otherwise specified by Seller in writing. THIS IS THE SOLE AND EXCLUSIVE WARRANTY GIVEN BY SELLER WITH RESPECT TO THE GOODS AND IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, ARISING BY OPERATION OF LAW OR OTHERWISE, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE WHETHER OR NOT THE PURPOSE OR USE HAS BEEN DISCLOSED TO SELLER IN SPECIFICATIONS, DRAWINGS OR OTHERWISE, AND WHETHER OR NOT SELLER'S PRODUCTS ARE SPECIFICALLY DESIGNED AND/OR MANUFACTURED BY SELLER FOR BUYER'S USE OR PURPOSE. This warranty does not extend to any losses or damages due to misuse, accident, abuse, neglect, normal wear and tear, Buyer's negligence, unauthorized modification or alteration, use beyond rated capacity, or improper installation, maintenance or application. To the extent that Seller has relied upon any specifications, information, representation of operating conditions or other data supplied by Buyer or its agents in the selection or design of the Goods and the preparation of Seller's quotation, and in the event that actual operating conditions or other conditions differ from those represented by Buyer and relied upon by Seller, any warranties or other provisions contained herein which are affected by such conditions shall be null and void. If within thirty (30) days after Buyer's discovery of any warranty defects within the warranty period, Buyer notifies Seller thereof in writing, Seller shall, at its option, repair, correct or replace F.O.B. point of manufacture, that portion of the Goods found by Seller to be defective. Failure by Buyer to give such written notice within the applicable time period shall be deemed an absolute and unconditional waiver of Buyer's claim for such defects. Goods repaired or replaced during the warranty period shall be covered by the foregoing warranty for the remainder of the original warranty period or ninety (90) days, whichever is longer. Buyer assumes all other responsibility for any loss, damage, or injury to persons or property arising out of, connected with, or resulting from the use of Goods, either alone or in combination with other products/components.

**7. LIMITATION OF REMEDY AND LIABILITY:** THE SOLE AND EXCLUSIVE REMEDY FOR BREACH OF ANY WARRANTY HEREUNDER (OTHER THAN THE WARRANTY PROVIDED UNDER SECTION 7) SHALL BE LIMITED, AT SELLER'S OPTION, TO REPAIR, CORRECTION OR REPLACEMENT UNDER SECTION 5; SELLER SHALL NOT BE LIABLE FOR DAMAGES CAUSED BY DELAY IN PERFORMANCE AND IN NO EVENT, REGARDLESS OF THE FORM OF THE CLAIM OR CAUSE OF ACTION (WHETHER BASED IN CONTRACT, INFRINGEMENT, NEGLIGENCE, STRICT LIABILITY, OTHER TORT OR OTHERWISE), SHALL SELLER'S LIABILITY TO BUYER AND/OR ITS CUSTOMERS EXCEED THE PRICE PAID BY BUYER FOR THE SPECIFIC GOODS PROVIDED BY SELLER GIVING RISE TO THE CLAIM OR CAUSE OF ACTION. BUYER AGREES THAT IN NO EVENT SHALL SELLER'S LIABILITY TO BUYER AND/OR ITS CUSTOMERS EXTEND TO INCLUDE INCIDENTAL, CONSEQUENTIAL OR PUNITIVE DAMAGES. The term "consequential damages" shall include, but not be limited to, loss of anticipated profits, business interruption, loss of use or revenue, cost of capital or loss or damage to property or equipment. It is expressly understood that any technical advice furnished by Seller with respect to the use of the Goods is given without charge, and Seller assumes no obligation or liability for the advice given, or results obtained, all such advice being given and accepted at Buyer's risk.

**8. PATENTS AND COPYRIGHTS:** Subject to the limitations of the second paragraph of Section 6, Seller warrants that the Goods sold, except as are made specifically for Buyer according to Buyer's specifications, do not infringe any valid U.S. patent or copyright in existence as of the date of shipment. This warranty is given upon the condition that Buyer promptly notify Seller of any claim or suit involving Buyer in which such infringement is alleged, and that Buyer cooperate fully with Seller and permit Seller to control completely the defense, settlement or compromise of any such allegation of infringement. Seller's warranty as to use only applies to infringements arising solely out of the inherent operation of such Goods. In the event such Goods are held to infringe such a U.S. patent or copyright in such suit, and the use of such Goods is enjoined, or in the case of a compromise or settlement by Seller, Seller shall have the right, at its option and expense, to procure for Buyer the right to continue using such Goods, or replace them with non-infringing Goods, or modify same to become non-infringing, or grant Buyer a credit for the depreciated value of such Goods and accept return of them.

**9. EXCUSE OF PERFORMANCE:** Seller shall not be liable for delays in performance or for non-performance due to acts of God, acts of Buyer, war, fire, flood, weather, sabotage, strikes, or labor or civil disturbances; governmental requests, restrictions, laws, regulations, orders or actions; unavailability of or delays in transportation; default of suppliers; or unforeseen circumstances or any events or causes beyond Seller's reasonable control. Deliveries or other performance may be suspended for an appropriate period of time or canceled by Seller upon notice to Buyer in the event of any of the foregoing, but the balance of the agreement shall otherwise remain unaffected as a result of the foregoing. If Seller determines that its ability to supply the total demand for the Goods, or to obtain material used directly or indirectly in the manufacture of the Goods, is hindered, limited or made impracticable due to causes set forth in the preceding paragraph, Seller may allocate its available supply of the Goods or such material (without obligation to acquire other supplies of any such Goods or material) among its purchasers on such basis as Seller determines to be equitable without liability for any failure of performance which may result therefrom. Seller reserves the right to change designs and specifications for the Goods without prior notice to Buyer, except with respect to Goods being made-to-order for Buyer.

**10. ASSIGNMENT:** Buyer shall not assign its rights or delegate its duties hereunder or any interest therein or any rights hereunder without the prior written consent of the Seller, and any such assignment, without such consent, shall be void.

**11. GENERAL PROVISIONS:** These terms and conditions supersede all other communications, negotiations and prior oral or written statements regarding the subject matter of these terms and conditions. No change, modification, rescission, discharge, abandonment, or waiver of these terms and conditions shall be binding upon the Seller unless made in writing and signed on its behalf by a duly authorized representative of the Seller. No conditions, usage or trade, course of dealing or performance, understanding or agreement purporting to modify, vary, explain, or supplement these terms and conditions shall be binding unless hereafter made in writing and signed by the party to be bound, and no modification shall be affected by the Seller's receipt, acknowledgment, or acceptance of purchase orders, shipping instruction forms, or other documentation containing terms at variance with or in addition to those set forth herein. No waiver by either party with respect to any breach or default or of any right or remedy and no course of dealing, shall be deemed to constitute a continuing waiver of any other breach or default or of any other right or remedy, unless such waiver be expressed in writing and signed by the party to be bound. All typographical or clerical errors made by Seller in any quotation, acknowledgment or publication are subject to correction. The validity, performance, and all other matters relating to the interpretation and effect of this agreement shall be governed by the law of the state of Kentucky. Buyer and Seller agree that the proper venue for all actions arising in connection herewith shall be only in the State where the Goods involved in such actions were manufactured and the parties agree to submit to such jurisdiction.

# WAREHOUSE LOCATIONS



## UNITED STATES

★ **COMPANY HEADQUARTERS & WAREHOUSE**  
7765 National Turnpike, Unit 190  
Louisville, KY 40214  
Tel: (502) 636-2811  
(800) 666-2811 U.S. & CAN  
Fax: (800) 274-4566

★ **ATLANTA, GA REGIONAL WAREHOUSE**  
2689A Mountain Industrial Blvd.  
Tucker, GA 30084  
Tel: (770) 491-1515  
(800) 241-9051  
Fax: (770) 723-7681

★ **CHICAGO, IL REGIONAL WAREHOUSE**  
1001 North Mittel Drive  
Wood Dale, IL 60191  
Tel: (630) 238-2005  
Fax: (630) 238-2006

★ **DALLAS, TX REGIONAL WAREHOUSE**  
801 Heinz Way  
Grand Prairie, TX 75051  
Tel: (972) 602-4400  
(800) 625-5742  
Fax: (972) 602-4410

★ **DENVER, CO REGIONAL WAREHOUSE**  
11551 East 45 Ave, Unit B  
Denver, CO 80339  
Tel: (720) 941-6400

★ **LOS ANGELES, CA REGIONAL WAREHOUSE**  
10013 E. 8th Street Suite R  
Rancho Cucamonga, CA 91730  
Tel: (909) 941-0623  
(800) 625-1408  
Fax: (909) 941-0967

★ **PEORIA, IL REGIONAL WAREHOUSE**  
7921 N. Hale Ave.  
Peoria, IL 61615  
Tel: (309) 692-1895  
Fax: (309) 692-2161

★ **PHILADELPHIA, PA REGIONAL WAREHOUSE**  
855 Dunks Ferry Road  
Bensalem, PA 19020  
Tel: (215) 638-8904  
(800) 447-4785  
Fax: (215) 638-2581  
(800) 283-2388

★ **PHOENIX, AZ REGIONAL WAREHOUSE**  
1120 N. 47th Avenue  
Phoenix, AZ 85043  
Tel: (602) 447-0200  
(800) 373-4851  
Fax: (602) 447-0554

★ **SALT LAKE CITY, UT REGIONAL WAREHOUSE**  
760 West Layton Avenue  
Salt Lake City, UT 84104  
Tel: (801) 972-3131

★ **SAN FRANCISCO, CA REGIONAL WAREHOUSE**  
1535 Gladding Court, Unit F  
Millpitas, CA 95035  
Tel: (408) 841-2949  
Fax: (408) 942-9226

★ **SEATTLE, WA REGIONAL WAREHOUSE**  
920 S. Doris Street  
Seattle, WA 98108  
Tel: (206) 762-4888  
Fax: (206) 767-4386

★ **VALDOSTA, GA REGIONAL WAREHOUSE**  
1617 James P. Rodgers Drive  
Valdosta, GA 31601  
Tel: (229) 245-0669  
Fax: (229) 245-0659

★ **VANCOUVER, WA REGIONAL WAREHOUSE**  
7509 North East 47th Ave.  
Vancouver, WA 98661  
Tel: (360) 816-0434  
Fax: (360) 816-0437

## CANADA

★ **CONTACT DELAGE SALES OFFICE & WAREHOUSE**  
900 Herelle  
Longueuil, Quebec J4G 2M8  
Tel: (450) 449-9444  
Fax: (450) 449-6090

★ **FEC DISTRIBUTION INC. SALES OFFICE & WAREHOUSE**  
1280 Aimco Blvd.  
Mississauga, Ontario L4W 1B2  
Tel: (877) 332-0060  
Fax: (877) 471-2160

★ **SPARTAN AGENCIES LTD SALES OFFICE & WAREHOUSE**  
9703-199 A Street  
Langley, British Columbia V1M 2X7  
Tel: (604) 888-2241  
Fax: (604) 888-2126

