


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



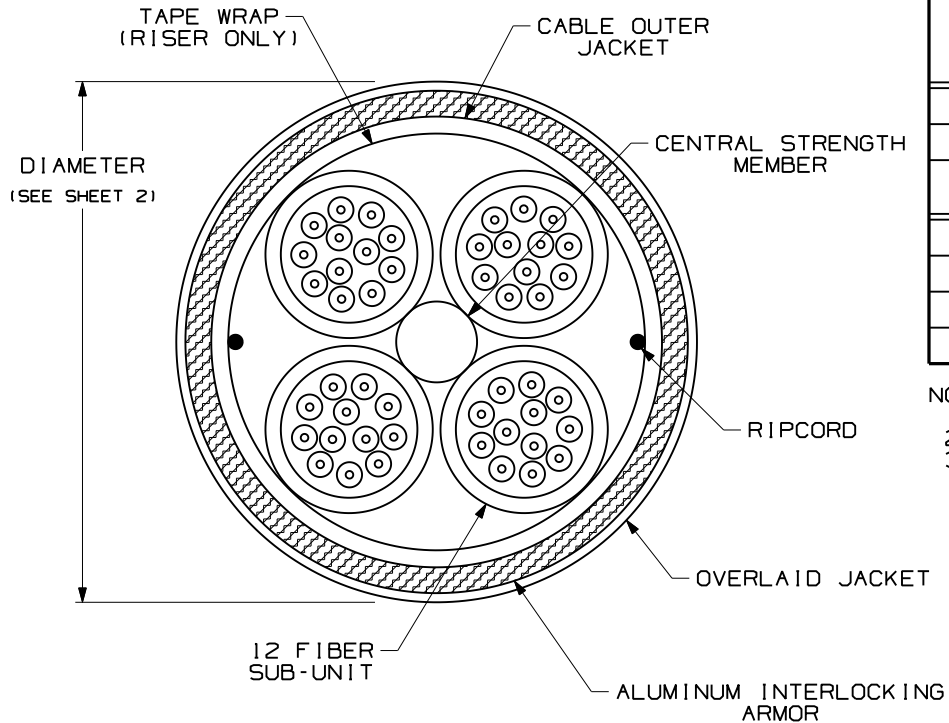

TECHNICAL SPECIFICATIONS			
MAXIMUM LOSS		SINGLEMODE MAXIMUM LOSS	
3.5dB/KM @ 850nm 1.5dB/KM @ 1300nm		.75dB/KM @ 1310nm .75dB/KM @ 1500nm	
TENSILE LOAD - OFCR		TENSILE LOAD - OFCR-LS/OFCP	
INSTALLATION	LONG TERM	INSTALLATION	LONG TERM
1320 N (300 lbf)	330 N (74 lbf)	660 N (150 lbf)	165 N (38 lbf)
OPERATION		OFCR	
INSTALLATION		OFCR-LS/OFCP	
STORAGE		OFCR	
		OFCR-LS/OFCP	
		OFCR	
		OFCR-LS/OFCP	

NOTES:

1. DIAMETER DIMENSION, SHOWN FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS ( ) ARE ENGLISH.
3. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
02	10-26-09	EFK		RELEASED TO PRODUCTION	02055-99				

OPTI-CORE 48 FIBER ARMORED DISTRIBUTION CABLE  
WITH 4 SUB-UNITS OF 12 FIBERS  
CUSTOMER DRAWING

			TINLEY PARK, ILL 60477	
	ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED.		DIMENSIONAL TOLERANCES ARE: (.X) (.XXX) ± 0.3 (.010) (.XX) ± 0.8 (.03) ANGLES	
DRAWING FILENAME M02055BX_DC_48/01A	SCALE NONE		PART NO. FSP**48Y FOP**48Y	
DRAWING NO. 02055-99	SHEET 1 OF 2		SIZE A	
DRAWN BY MC	REVIEW DRAWING NUMBERS		DATE 06-03-05	
CHECK'D WMA				

