



safety products

## GFCI In-Line Cord Sets

### GFCI In-Line Cord Sets

Designed for rugged duty. Molded from high impact polymer with booted reset and test buttons. At home in hostile environments such as industrial, construction, maintenance and commercial work sites. Provides compliance with National Electric Code (NEC 2008) Article 590.6 for "Temporary Installations." Applications include:

- ▶ High Pressure Sprayer Washers
- ▶ Drain Snakes
- ▶ Construction Sites
- ▶ Power Tools
- ▶ Pumps
- ▶ Industrial Appliances

Rainproof rated, UL listed for outdoor use. Standard lengths: 2', 6', and 25' with corresponding locking connectors. Custom cable gauges, lengths and terminations available by special order. To prevent unmonitored equipment startup, manual reset is required after GFCI trip and power outage.

#### FEATURES

**44700 004-3** (2') Ⓢ

**44700 005-2** (6')

**44700 006-1** (25')

- ▶ Volts/Amps: 120V/30A
- ▶ Cord Gauge: 10/3 AWG
- ▶ NEMA L5-30P & R
- ▶ Trip Level: 4 - 6 mA

**44720 012-3** (3') Ⓢ

**44720 013-2** (6')

**44720 020-1** (25')

- ▶ Volts/Amps: 240V/30A
- ▶ Cord Gauge: 10/3 AWG
- ▶ NEMA L6-30P & R
- ▶ Trip Level: 4 - 6 mA




#### TECHNICAL DATA\*

<b>Grounded Neutral</b>	4 Ohms typical
<b>Trip response time for ground fault and grounded neutral trip</b>	less than 25mS
<b>Voltage surge withstand</b>	3kv ringwave test and 4kv/2kA surge immunity test
<b>Radio frequency noise susceptibility</b>	operates within normal limits with 0.5 volts injected on power line 150kHz-230mHz
<b>Frequency</b>	50 / 60 Hz
<b>Endurance</b>	3,000 operations minimum
<b>Overload Current</b>	six times rated current
<b>Operating temperature range</b>	-35°C to 66°C
<b>Effect of 10 Amp turn DC Shock on ground fault trip</b>	5% maximum trip level variation
<b>Insulation voltage</b>	1500 VRMS - 1 Min.
<b>Power On indication</b>	mechanical indicator, red stripe on reset



44700 004-3

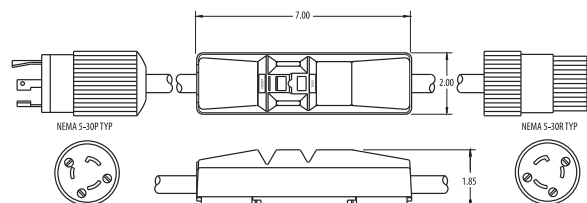

**Coleman Cable Inc.**

800.323.9355 • [www.colemancable.com](http://www.colemancable.com)