

M-8073 2




FIGURE 2

WIRE	COLOR
1	ORANGE
2	BLUE
3	WHITE/BLACK
4	BLACK
5	WHITE
6	RED
7	GREEN
8	RED/BLACK






FIGURE 1

WIRE	COLOR
1	WHITE/BLACK
2	BLACK
3	WHITE
4	RED
5	ORANGE
6	BLUE
7	GREEN

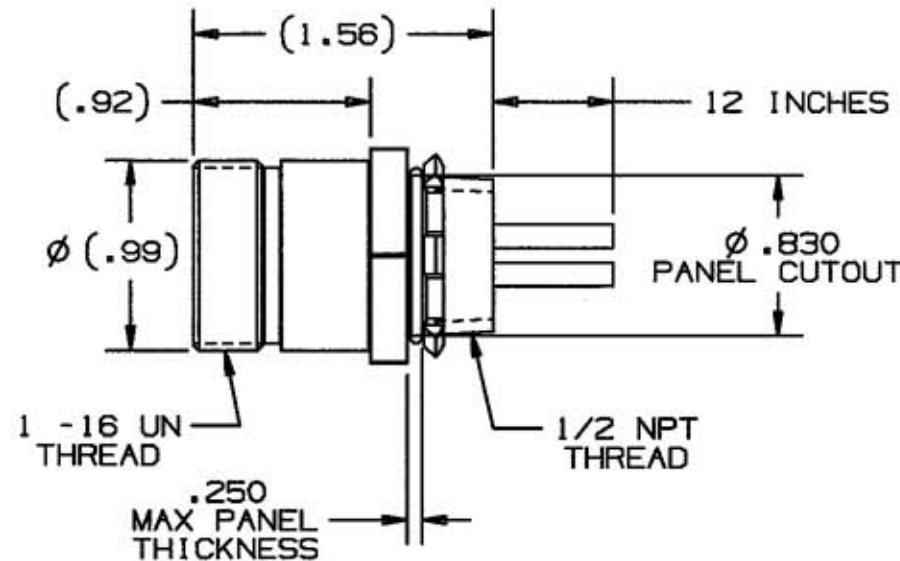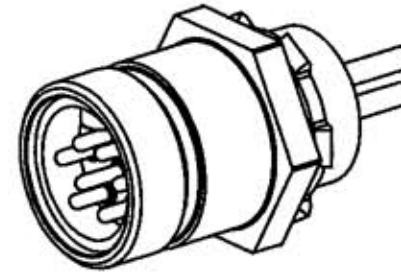

CATALOG NUMBER	SEE FIGURE NUMBER	NUMBER OF POLES	AMPS
HBMS07501	1	7	10
HBMS08501	2	8	9

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
RECEPTACLE SHELL	BRASS	NICKEL
INSULATOR	NYLON	WHITE
RETAINER	NYLON	
LOCKNUT	STEEL	ZINC
O-RING	RUBBER	BLACK
PIN CONTACT	BRASS	GOLD OVER Pd/Ni
WIRE	16 AWG PVC	

2	12/14/04 REVISED CHANGED DIMS. FROM 1.44 TO 1.56 FROM .80 TO .92 PER DCN 12131 CAC	D.J.H.	12/14/04
---	--	--------	----------

1	RELEASED PER DCN6427-1. DJH GPH		02/23/00
---	---------------------------------	--	----------

SYM	REVISIONS	APP	DATE
-----	-----------	-----	------

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
MALE RECEPTACLE
HEX MOUNT, 600V

TOLERANCES UNLESS OTHERWISE SPECIFIED	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT
FRACTIONS ± 1/64	DR. BY DJH
DECIMALS ± .005	TR. BY
ANGLES ± 2°	CHK'D BY
	APP. BY
	SCALE NONE
	DATE 02/23/00

DIMENSION SHEET FOR CAT. NO. SEE CHART REPAIRABLE ☐ NON-REPAIRABLE ☒ B M-8073 2