



M-6076 5

CABLE DIA.

.500 MIN
[12.70]
1.450 MAX
[36.83]

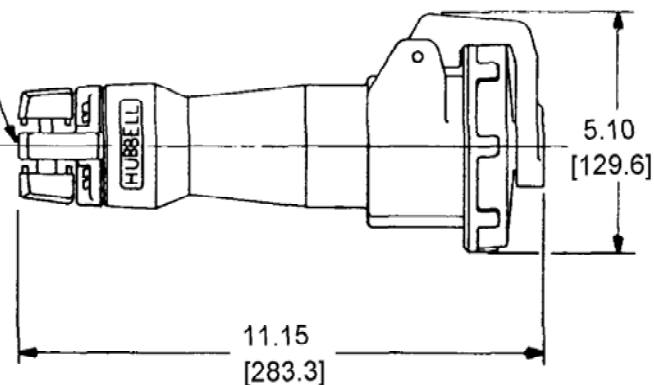

NOTES: (UNLESS OTHERWISE SPECIFIED)

1) DIMENSION FORMAT IS: INCHES
[mm]2) DIMENSIONS SHOWN ON THIS DRAWING ARE
NOMINAL VALUES FOR GENERAL USE ONLY.
ACTUAL PART TOLERANCES MUST BE
OBTAINED FROM HUBBELL ENGINEERING.

CAT. NO.	CONFIGURATION	RATING	HOUSING		CAT. NO.	CONFIGURATION	RATING	HOUSING	
			COLOR	MAT'L				COLOR	MAT'L
					HBL460C7W		60A 3Ø 480 VAC	RED	NYLON
HBL460C6V02		60 A 380 VAC 63A 380-415 VAC	RED	VALOX	HBL460C9W		60A 3Ø 250 VAC	BLUE	NYLON
HBL460C5WS		60A 3Ø 600VAC PILOT CONTACT A600	BLACK	NYLON	HBL460C9V05		60A 3Ø 250 VAC	BLUE	VALOX
HBL460C5W		60A 3Ø 600 VAC	BLACK	NYLON					
HBL463C6W		63 AMP 380-415 VAC	RED	NYLON	HBL460C12W		60 AMP 125/250 VAC	ORANGE	NYLON

CODE 74545

TITLE

60/63A. 3 POLE 4 WIRE
PIN & SLEEVE CONNECTORS

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
1. HOUSING	SEE TABLE	
2. INTERIOR	THERMOSET	
3. SLEEVES	BRASS	SILVER
4. INSERT SPRS.	BERR COPPER	
5. TERM. SCRS.	STAIN. STEEL	NICKEL
6. COVER	POLYESTER	
7. COV. SCR.	BRASS	
8. COV. SPR.	STAIN. STEEL	
9. GASKET	RUBBER	
10. DISC	POLYCARBONATE	
11. ARM	POLYESTER	
12. HINGE PIN	STAIN. STEEL	
13. HINGE SPR.	STAIN. STEEL	
14. GLAND CAP	POLYESTER	
15. GLANDS	RUBBER	
16. CLAMPS	POLYESTER	
17. CLAMP NUTS	BRASS	NICKEL
18. ASS'Y SCRS.	STAIN. STEEL	

5	ADDED CAT. # HBL460C6V02 AND SPECS. TO TABLE PER DCN 18699 DDL	CAC	04/24/12
4	ADDED CAT. NO. HBL460C5WS PER DCN 11116	RDK	8/27/03 SPN
3	ADDED HOUSING COLUMN. "63 AMP" WAS "60 AMP" "380-415 VAC" WAS "380 VAC" "SEE TABLE" WAS "NYLON" PER DCN8695 JMN	TCM	10-31-01
2	CHANGED FRACTIONAL DIMS. TO DECIMAL DIMS. & REVISED LIST OF PARTS	MM	7-18-91 AJL
1	REVISED LIST OF PARTS PER DCN 8695 JMN		10-25-82 ASM
SYM	REVISIONS	APP	DATE

TOLERANCES UNLESS
OTHERWISE SPECIFIED

DECIMALS ± .03
ANGLES ± 2°

HARVEY HUBBELL, INC.

BRIDGEPORT, CONN.

DR. BY *MJR* APP. BY *MM*
TR. BY *MM* SCALE *1:1*
CHKD. BY *MM* DATE *8-29-80*

DIMENSION SHOWN FOR CAT. NO. SEE TABLE

REPAIRABLE ☐NON-REPAIRABLE ☒

B M-6076

5