



(Shown with ceiling mount. See how to order for mounting options)

# Explosion-Proof Supervised LED Warning Light with XLT™

Model 27XL-024\*-4-MOD

## DESIGNED FOR USE IN EXPLOSION-PROOF ATMOSPHERES

- Approved for mounting in any manner-including dome up
- XLT™ Technology
- Available in 24VAC/DC
- Available in flashing or steady-burn mode
- Six lens colors
- 60,000 hour LED
- 3/4" NPT pendant, ceiling and wall mount options available
- PLC Compatible
- Dome guard optional
- UL and cUL Listed
- Type 4X, IP66 enclosure
- Marine Rated

Federal Signal's Model 27XL-024\*-4-MOD explosion-proof LED light with XLT™ produces 60 high-intensity flashes per minute. 27XL-024-4-MOD is unique to the market because it covers an entire range of possible mounting configurations – including dome up. This warning light operates on 24VAC/DC, with a 4-wire supervised power circuit and is UL Listed for Class I, Division 1, Groups C and D; Class II, Division 1, Groups E, F and G; Class I, Division 2, Groups A, B; and Class III. The 27XL-024\*-4-MOD is UL and cUL listed, and Marine Rated.

eXtreme Light Technology (XLT) is a break through high-intensity LED array designed to meet the demands of industrial customers, producing maximum light output and superior lens fill. Configurable to either steady burning state or flashing mode, XLT provides improved performance over standard LEDs and increased versatility while maintaining low power consumption and vibration resistance expected from LED devices.

The 27XL-024\*-4-MOD features a standard low in-rush circuitry design that provides greater compatibility with factory automation control systems and less electrical interference with in-rush sensitive devices.

The 27XL-024\*-4-MOD is Type 4X rated and constructed to IP66. Corrosion resistance is achieved with a powder coat finish applied over the copper-free aluminum housing.

Federal Signal's 27XL-024\*-4-MOD is specifically designed for explosion-proof atmospheres and/or corrosive environments. This model can be paired with a pendant, ceiling or wall mount. Because it is easy to install and requires very low maintenance, it is ideal for use in areas such as oil rigs, mines, refineries, and chemical plants.

Model	Voltage	Operating Current	In-rush Current	Flash Rate/Minute	Mount
27XL-024* -4-MOD	24VAC/DC	400 mA	1.75 amps, 5.0 mS	60	Ceiling

\* Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green, (M) Magenta or (R) Red


<sup>1</sup> See "how to order" for mounting options.

## Hazardous Location Rating:

Hazardous Location	T-Code at Maximum Ambient Temperature, °C		
	40°C	55°C	66°C
Class I, Div 1, Groups C, D	T6	T6	T6
Class 1, Div 2, Groups A, B	T6	T6	T5
Class II, Div 2, Groups E, F, G	T6	T6	T6
Class III	T6	T6	T6



## EXPLOSION-PROOF SUPERVISED LED LIGHT (27XL-024\*-4-MOD)

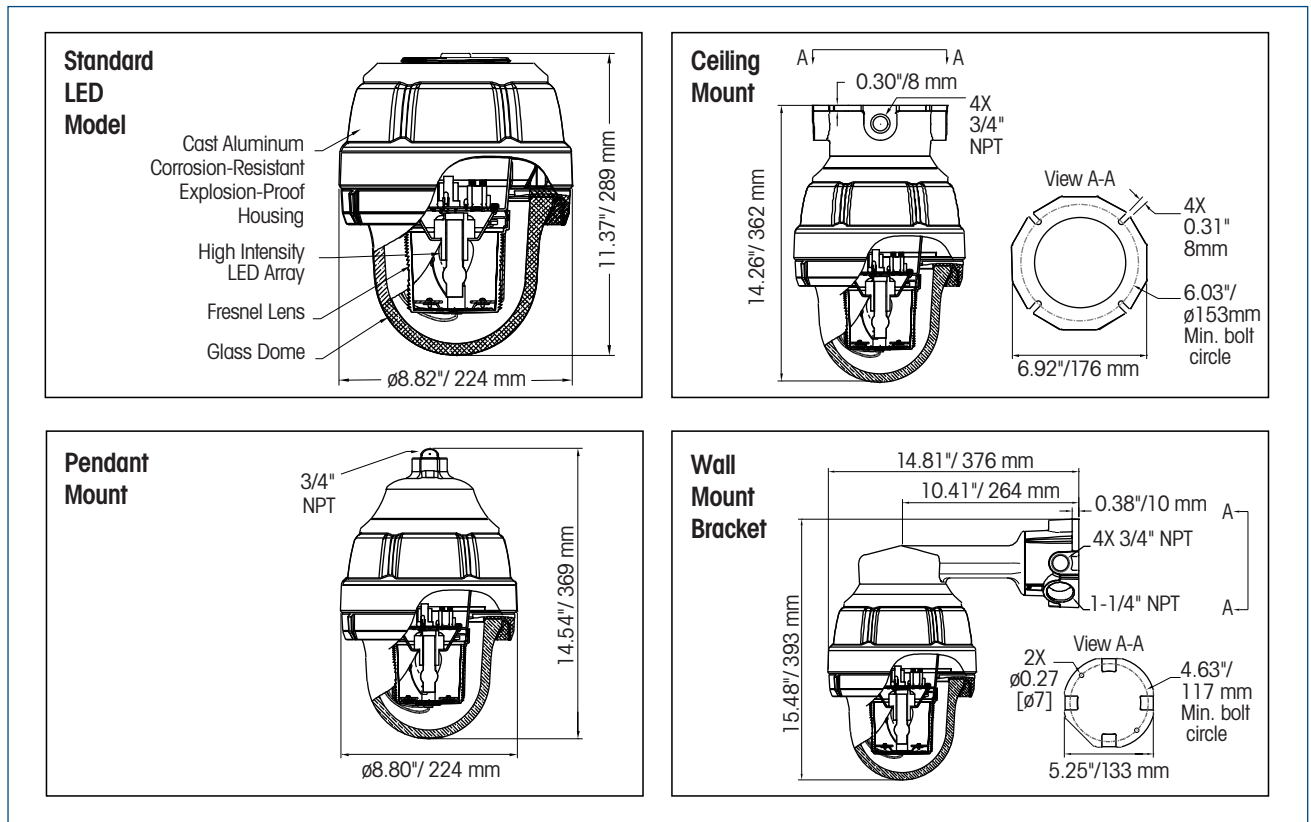

### SPECIFICATIONS

Lamp Life:	60,000 Hours	60,000 Hours
Light Source:	LED Array	LED Array
Operating Temperature Range:	-67°F to 150°F	-55°C to 65°C
Net Product Weight		
Signal without Mounting:	13.9 lbs.	6.3 kg
Ceiling Mount:	4.5 lbs.	2.0 kg
Pendant Mount:	2.0 lbs.	0.9 kg
Wall Mount:	5.9 lbs.	2.7 kg

### HOW TO ORDER

Light and Mounting Kit must be ordered together.

1. Specify model, voltage and color
2. Specify Mounting Kit

Ceiling Mount (CMXC-SB)  
 Pendant Mount (PMXC-SB)  
 Wall Mount (WMXC-SB)

- Optional Accessories:  
 Dome Guard (DGXC-SB)

### REPLACEMENT PARTS

<u>Description</u>	<u>Part Number</u>	<u>Description</u>	<u>Part Number</u>
Exterior Dome Assembly, Clear	K8436147A	PC board assembly, 24VDC	K2005455A
Interior Lens Assembly, Amber	K8550292A-02	LED array, Amber	K14700030A-A
Interior Lens Assembly, Blue	K8550292A-01	LED array, Blue	K14700030A-B
Interior Lens Assembly, Clear	K8550292A	LED array, Clear	K14700030A-W
Interior Lens Assembly, Green	K8550292A-04	LED array, Green	K14700030A-G
Interior Lens Assembly, Magenta*	K8550292A-05	LED array, Red	K14700030A-R
Interior Lens Assembly, Red	K8550292A-03		

\*Order LED array, Clear with the Magenta Interior Lens Assembly.