THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
CMRPSV20SILM	9 lb (4.1 kg)

NOTES:

1. IDENTIFICATION: VERTICAL, (20) 5-20R, METERED 120V / 20A / SINGLE-PHASE POU

PART NO.	COLOR
CMRPSV20SILM	BLACK

2. ACCESSORY COMPONENTS:
   (4) #10-32 x 1/2" MOUNTING SCREWS
   (4) #12-24 x 1/2" MOUNTING SCREWS
   (2) #10-32 LOCKING COLLAR SCREWS
   (2) L-BRACKETS
3. DIMENSIONS IN PARENTHESES ARE METRIC (mm).
4. POWER METER - RED, 4-DIGIT LED CONTINUOUSLY SCROLLS THROUGH POWER FACTOR, AMPS, VOLTS (RMS), AND REAL POWER IN WATTS (RMS).
5. SURGE SUPPRESSION UP TO 330V OR 720 JOULES.
6. UL® & c-UL® LISTED 1950.
7. RoHS COMPLIANT.
8. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
9. MAXIMUM AVAILABLE INPUT POWER = 1.9 KW

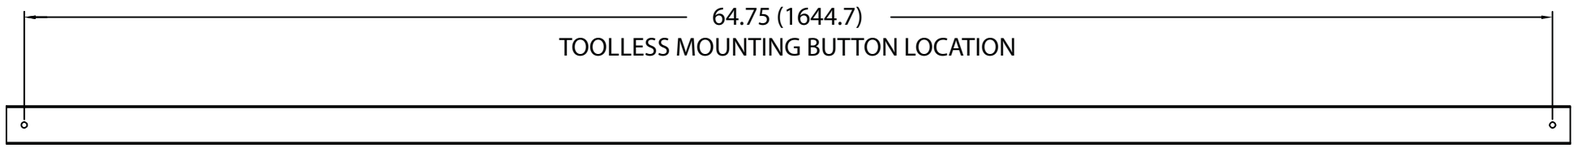

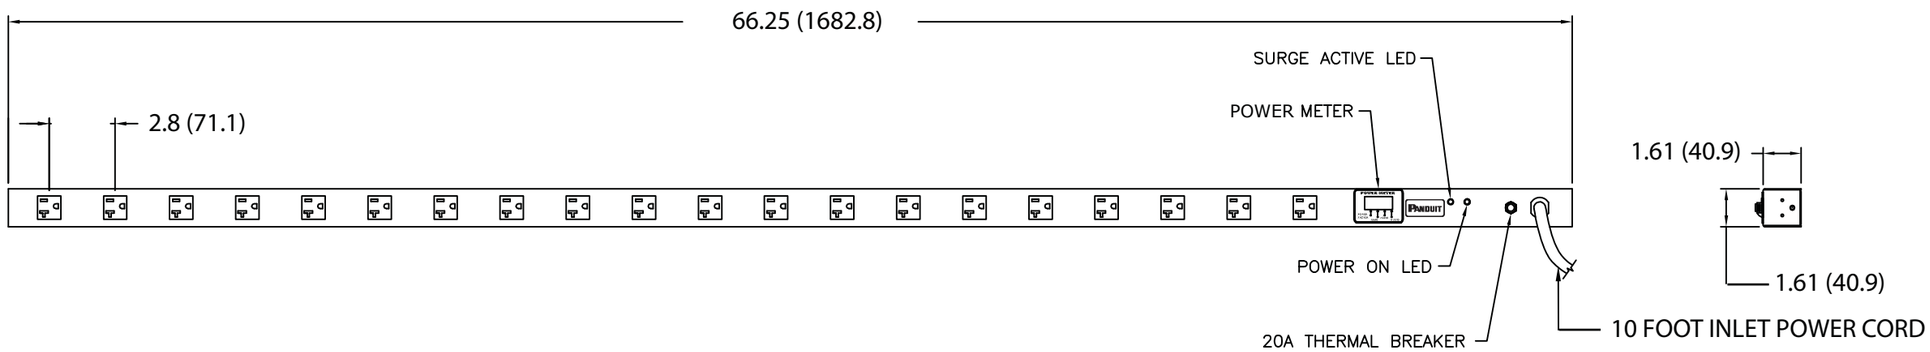



PLUG
20 AMP, 125V, SINGLE-PHASE
STRAIGHT BLADE
NEMA 5-20P

TWENTY (20)
RECEPTACLES
20 AMP, 125V
STRAIGHT BLADE
NEMA 5-20R

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
00A	10-26-11	MRWA	KRKE	RELEASED TO PRODUCTION	09V098YK			

MODEL FILENAME: 09V098YK/00.PRT

CAD FILENAME/LAYERS: 09V098YK_DC/00A.PRT

PANDUIT CORP TINLEY PARK, ILLINOIS

VERTICAL, (20) 5-20R, METERED
POWER OUTLET UNIT
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:

INCHES		[METRIC - MILLIMETER]		ANGLE
X.X	+/- 0.03	X.	+/- 0.8	+/- 1°
X.XX	+/- 0.015	X.X	+/- 0.4	
X.XXX	+/- 0.005	X.XX	+/- 0.13	

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION

DRAWN BY: MRWA
MAT'L:
SCALE: NONE
DATE: 10-26-11
DRAWING NO.: 09V098YK
DWG SIZE: B
CHK'D: KRKE