



safety products

High Power Equipment Ground Fault Protective Devices (EGFPD) and GFCI/ELCI Adjustables

High Power Equipment Ground Fault Protective Devices (EGFPD) and GFCI/ELCI Adjustables

Configured for both in-line and bulk head mount. Engineered to trip within 25 milliseconds. Protects:

- ▶ Motors
- ▶ Pumping Systems
- ▶ Pressure Washers
- ▶ Manufacturing Equipment
- ▶ Welders
- ▶ Hoists

To prevent equipment startup after EGFPD or GFCI/ELCI trips, manual reset required. Will reset on power restoration following disruption of primary power. Key enables trip level selection and locks at a trip level with key removal.

FEATURES

44110 012-1 EGFPD*

- ▶ Volts/Amps: 208-240V/30A
- ▶ Trip Level: 10, 30 & 50 mA
- ▶ Three Phase

44140 012-1 EGFPD*

- ▶ Volts/Amps: 208-240V/60A
- ▶ Trip Level: 10, 30 & 50 mA
- ▶ Three Phase

44120 012-1 EGFPD*

- ▶ Volts/Amps: 480V/30A
- ▶ Trip Level: 10, 30 & 50 mA
- ▶ Three Phase

44130 012-1 EGFPD*

- ▶ Volts/Amps: 480V/60A
- ▶ Trip Level: 10, 30 & 50 mA
- ▶ Three Phase

44610 001-1 GFCI/ELCI

- ▶ Volts/Amps: 208-240V/30A
- ▶ Trip Level: 6, 10 & 30 mA
- ▶ Three Phase

44640 001-1 GFCI/ELCI

- ▶ Volts/Amps: 208-240V/60A
- ▶ Trip Level: 6, 10 & 30 mA
- ▶ Three Phase

44620 001-1 GFCI/ELCI

- ▶ Volts/Amps: 480V/30A
- ▶ Trip Level: 6, 10 & 30 mA
- ▶ Three Phase

44630 001-1 GFCI/ELCI

- ▶ Volts/Amps: 480V/60A
- ▶ Trip Level: 6, 10 & 30 mA
- ▶ Three Phase




TECHNICAL DATA

Response time for ground fault	25mS - typical
Frequency	50 / 60 Hz
Endurance	3,000 operations minimum
Overload Current	six times rated current
Operating temperature range	-20°C to +40°C
Insulation voltage	1500 VRMS - 1 Min.
Power On indication	lighted indicator
Drop out voltage	60% rated voltage - typical
Reset type	auto
Connection type	user attachable
Enclosure	NEMA 4 16 gauge steel



44110 012-1

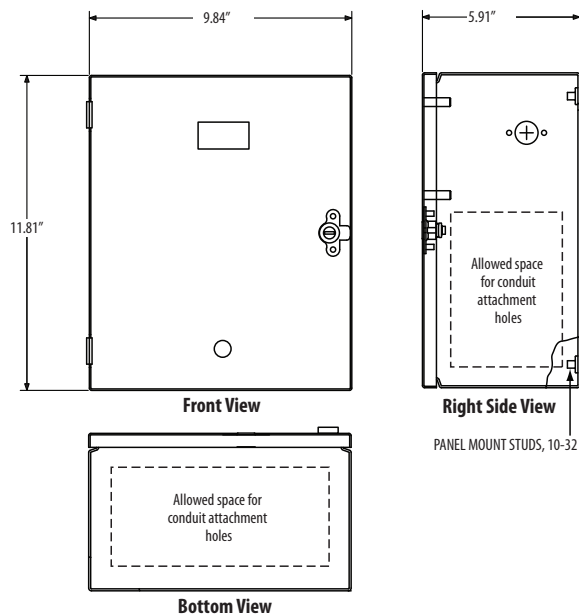

Coleman Cable Inc.

800.323.9355 • www.colemancable.com