

3 CIRCUIT
LOAD CENTER W/O NEUTRAL
20AMP. BREAKER 1-POLE (2X)

TERMINAL BAR





5-20R2GFI
20AMP.
GFI DUPLEX

17.5

1/2"x15/16"
MOUNTING
HOLE (4X)

5.3

4.0

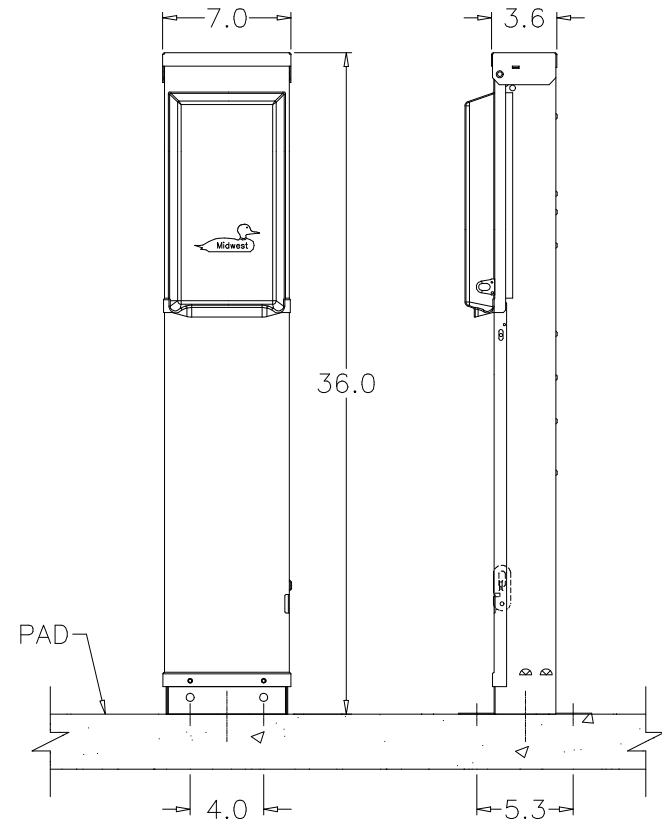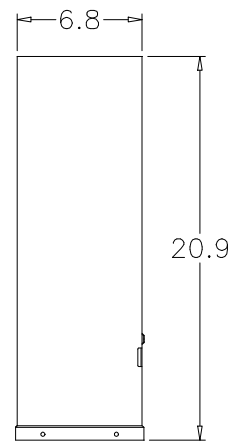


SH20

NOTES: PAD MOUNTED POST

WIRE RANGE TABLE :

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	14-8	14-2	12-8	12-2
LOAD	14-10	14-10	---	---
NEUTRAL	14-4	14-4	14-4	14-4
EQUIP. GRND.	12-8	12-2	12-8	12-2
POST LINE CONNECTORS SUITABLE FOR LOOP FEED	#1-300 KCMIL		#1-300 KCMIL	
EQUIP. GRND.	12-2	12-2	12-2	12-2

MIDWEST ELECTRIC
PRODUCTS, INC.
Mankato, MN




Dr. By: JDE
Ck. By:
CR: R0746956

* = Critical To Quality
Unless Otherwise Specified
Tolerances On:
3 Pl. Decimals ± .010
2 Pl. Decimals ± .030
Fractions ± 1/32
Angles ± 1/2°
Holes ± .003
Dimensions Are In Inches

AutoCad
Generated
SCALE
1 : 1
SIZE
A
SHEET 1 OF 1

TITLE: U011CP4010
OUTLINE DRAWING
DWG NO: 198B8603



Rev.1 CR R0746956 JDE 1-15-08