



safety products

ELCI In-Line User Attachables

ELCI In-Line User Attachables

Dual user attachable configurations for OEM connection of cable. Units are dual voltage rated. Operation and trip times equal or exceed that of the GFCI's. Provides equipment protection for office equipment. Applications include:

- ▶ Copiers
- ▶ Printers
- ▶ Scanners
- ▶ Film Processors
- ▶ Image Setters
- ▶ Appliances

To prevent unmonitored equipment startup, manual reset is required after ELCI trip. Does not require reset following disruption of primary power.

FEATURES

26140 010-6

- ▶ Volts/Amps: 120V/20A & 240V/16A
- ▶ Accepts 18 - 12 AWG (SJT)
- ▶ Trip Level: 30 mA

25040 101-3

- ▶ Volts/Amps: 120V/20A & 240V/16A
- ▶ Accepts 18 - 12 AWG (SJT)
- ▶ Trip Level: 10 mA




TECHNICAL DATA

Trip response time for ground fault	less than 25mS
Voltage surge withstand	3kv ringwave test and 4kv/2kA surge immunity test
Radio frequency noise susceptibility	operates within normal limits with 0.5 volts injected on power line 150kHz-230mHz
Frequency	50 / 60 Hz
Endurance	5,000 operations minimum
Overload Current	six times rated current
Operating temperature range	10°C to 60°C
Insulation voltage (Hi-Pot)	1500 VRMS - 1 Min.
Power On indication	lighted indicator



25040 101-3

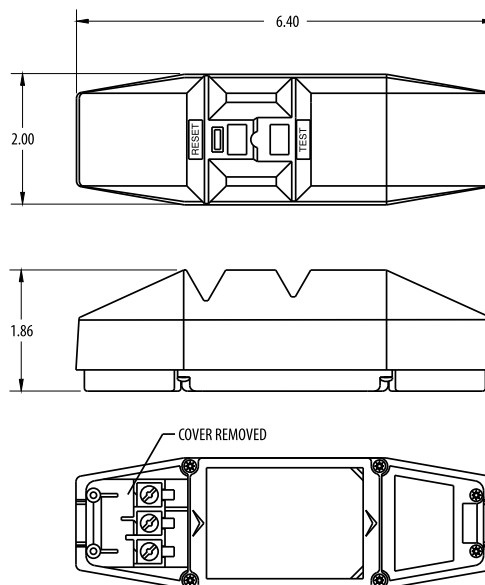

Coleman Cable Inc.

800.323.9355 • www.colemancable.com