

Mercmaster™ III Low Profile Luminaires

High Pressure Sodium and Pulse Start Metal Halide

Listed for simultaneous exposure to combustible dusts and flammable gases or vapors.

Class I, Division 2, Groups A, B, C, D
Class I, Zone 2, AEx nA nR IIC (Z2)
Class I, Zone 2, Ex nR IIC (Z) †
Class I, Zone 2, AEx nR IIC (ZB)

Class II, Division 1 and 2, Groups E, F, G
Class III
Simultaneous Exposure (Class I, Division 2/
Class II, Division 1)

Fixtures Outside Type (Salt Water)
Type 4X
IP66

Applications

- Enclosed and gasketed fixtures suitable for use in:
 - Marine and wet locations
 - A wide range of industrial, chemical processing and other areas where flammable gases and vapors or combustible dusts are present under conditions defined by the National Electrical Code as Class I, Division 2; Class II, Division 1 and 2; and Class III
 - Areas of low clearance, low ceiling heights or where fixture weights must be minimized
 - For Zone 2, the method of protection is AEx nA nR – Restricted Breathing/Nonsparking or AEx nR – Restricted Breathing
 - Non-hazardous locations where severe weather conditions, excessive moisture, dirt, dust, corrosive atmosphere or high ambient temperatures are encountered
- Typical applications include:
 - Pulp and paper mills
 - Processing plants
 - Chemical plants
 - Oil refineries
 - Foundries
 - Manufacturing plants
 - Storage areas
 - Waste and sewage treatment
 - Parking garages
 - Other areas where dust, water, dirt and rough usage are a problem

Features

- Compact light weight low profile design is suited for low mounting heights in conjunction with lower wattage fixtures.
- Modular design allows scores of fixture component combinations to meet installation and lighting needs. Uses same mounting hoods and optical accessories as Mercmaster III.
- A choice of heat-resistant prismatic glass refractors (NEMA I, III or V) or heat-resistant globes which thread directly into ballast housing. Photometrics available upon request – contact your local sales representative.
- Standard dome or 30° angle reflectors made of fiberglass reinforced white polyester. Highly resistant to corrosive atmospheres.
- Accommodates medium base lamps.
- A wide range of voltages available (120 to 600 Volt) and ballast types (Reactor, CWA, CWI and Super CWA).
- Medium base lamp type and watts:
 - HPS 50 W-150 W
 - PSMH 50 W-175 W
- Hinge has high lip for added safety during installation and servicing. Hinge and bolt construction assures 360° compression at all points on ballast housing gasket for positive sealing. Swing away design of captive bolt and nut simplifies servicing.
- All Mercmaster III mounting hoods have provision for easy field installation of fuses in fixtures (see fuse kits).
- Fixtures are for use in Class I, Zone 2 hazardous locations.
- The AEx nA nR / Ex nR (†) factory sealed Mercmaster III prevents vapors and gases from entering the globe chamber. There are no seals or putty required which will reduce installation time and installation errors.



Low Profile Mercmaster III with Prismatic Globe and Guard

Standard Materials

- Mounting hoods, bodies and guard: cast copperfree (4/10 of 1% max.) aluminum
- All hardware and catch assemblies: stainless steel
- Reflectors: Fiberglass reinforced white polyester
- Globes and Refractors: heat-resistant prismatic glass

Standard Finishes

- Mounting hoods, bodies and guards: baked gray epoxy-clad finish, electrostatically applied for complete uniform protection

Options

- Quartz Auxiliary comes to full brightness immediately and remains lit until the HID lamp attains 60-70% of full illumination. Quartz Auxiliary supplied with relay switch and socket to accept 120 V quartz double-contact bayonet base lamp (not included). Add suffix **-E †**.
- Guards with gray epoxy painted to match fixtures, supplied with stainless steel screws. Add suffix **-G** before voltage suffix.
- Hot Restrike to restrike HPS lamp immediately when power is restored after a momentary power interruption. Add suffix **-R**.
- Smart Starter incorporates a 1-1/2 minute timer and performs as a conventional starter to normally start lamp. Removes itself from circuit if lamp burns out or is removed from socket. Eliminates starter failures caused by prolonged operation with cycling or failing lamps and simplifies finding their location, reducing maintenance and repair costs. Available for all fixtures. Add suffix **-S**.
- Smart Hot Restrike will immediately restrike HPS lamp when power is restored after a momentary power interruption. The smart function removes the hot restrike ignitor from the circuit if the lamp burns out or is removed from the socket. Eliminates starter failures caused by prolonged operation with cycling or failing lamps. Add suffix **-SR**.
- AEx nA nR fixtures, add suffix **-Z2**.
- AEx nR fixtures, add suffix **-ZB**.
- Ex nR fixtures, add suffix **-Z †**.
- Reflectors are available as standard dome and 30° angle polyester. Order separately.

† Fixtures equipped with quartz auxiliary lamp do not comply with NEC/CEC † requirements and are not suitable for use in classified locations.

† CSA Certification Only.

Mercmaster™ III Low Profile Luminaires

High Pressure Sodium and Pulse Start Metal Halide

Listed for simultaneous exposure to combustible dusts and flammable gases or vapors.

Class I, Division 2, Groups A, B, C, D
Class I, Zone 2, AEx nA nR IIC (Z2)
Class I, Zone 2, Ex nR IIC (Z) ¹
Class I, Zone 2, AEx nR IIC (ZB)

Class II, Division 1 and 2, Groups E, F, G
Class III
Simultaneous Exposure (Class I, Division 2/
Class II, Division 1)

Fixtures Outside Type (Salt Water)
Type 4X
IP66

Certifications and Compliances *

- UL Listed: 60079-15
- UL Standard: 1598A, UL 844, Marine Type Electric Fixtures Outside Type (Salt Water)
- CSA Certified: LR25428

Related Products

- Photocells for classified use are available, see *PCD2 Series*.

Order using catalog numbering guide below or select catalog number from tables on following pages.

Catalog Numbering Guide

ML	A	L	15	2	G1	G	MT	R	Z2
Series: ML - Mercmaster III Low Profile		Lamp Type: I - Incandescent L - High Pressure Sodium H or P - Pulse Start Metal Halide H - 175 W Metal Halide (available with TT voltage only) 		Hub Size: 2 - 3/4" NPT 3 - 1" NPT 4 - 1-1/4" NPT stanchion 5 - 1-1/2" NPT stanchion		Guard Options: G - Cast Guard N - No Guard		Options: E - Emergency Quartz  F - Fuse Kit (Specify Voltage)  R - Hot Restrike  S - Smart Starter  SR - Smart Hot Restrike  H1 - Photocontrol 120 V H2 - Photocontrol 208 V H3 - Photocontrol 240 V H4 - Photocontrol 277 V C - Safety Cable Adapted  D - E-27 Export Socket T - Terminal Blocks  V - Anti-Vibration Modifications  X - Appledapter  Mounting Hood Adapter  <i>Optional Fusing</i>  FN - 120 V FP - 208 V FS - 240 V FT - 277 V FF - 480 V	
Mounting: A - Pendant (rigid mounting) C - Ceiling D - Pendant Cone Hood F - Pendant (flexible mounting) R - 90° Stanchion S - 25° Stanchion W - Wall		Wattage: 10 - 100 W HPS, PSMH 15 - 150 W HPS, PSMH and 60-150 W max. Incandescent 17 - 175 W PSMH 17 - 175 W MH  50 - 50 W HPS, PSMH 70 - 70 W HPS, PSMH		Optical Assembly:  G1 - Globe J1 - NEMA I Glass Refractor J3 - NEMA III Glass Refractor J5 - NEMA V Glass Refractor P2 - NEMA II Polymeric Refractor P3 - NEMA III Polymeric Refractor P4 - NEMA IV Polymeric Refractor P5 - NEMA V Polymeric Refractor		Voltage:  LB - Incandescent, 120, 60 Hz MT - 120/208/240/277, 60 Hz 5MT - 120/208/240/ 277/480, 60 Hz 48 - 480, 60 Hz 125 - 120, 50 Hz 225 - 225, 50 Hz 226 - 220, 60 Hz 245 - 240, 50 Hz C2 - 208, 60 Hz, CWI  C3 - 240, 60 Hz, CWI  C6 - 480, 60 Hz, CWI  C7 - 600, 60 Hz, CWI  TT - 120/277/347, 60 Hz, CWA 		Suffix: Z2 - Zone 2 suffix (required for AEx nA nR rating) ZB - Zone 2 suffix (required for AEx nR) Z - Zone 2 suffix (required for Ex nR) 	

* Compliance data varies for specific fixtures. Consult Appleton regarding suitability of specific fixtures for a particular application.

¹ Other voltages, frequencies available – contact your local sales representative. Voltages shown are limited to specific combinations; refer to following pages.

² Polymeric Refractor suitable for Class II, Groups F and G, NEMA 4X and Marine Type Electric Fixtures Outside Type (Salt Water) only (100 W PSMH Max.).

Reflectors ordered separately.

³ Available for 50-150 W HPS fixtures only.

⁴ Available for HPS or PSMH fixtures.

⁵ Not suitable for hazardous location per NEC/CEC ¹.

⁶ Canadian Electrical Code does NOT allow fusing in hazardous locations ¹.

⁷ Appledapter is available for use with the pendant, ceiling and angled stanchion mounting only.

⁸ Optional fusing is available for use with MT, 5MT and 48 voltage suffixes ONLY.

¹ CSA Certification Only.

Mercmaster™ III Low Profile Luminaire Thermal Performance

Class I, Division 2; Class II, Division 1; Simultaneous exposure to hazardous conditions in both classifications

Temperature identification numbers of Mercmaster III Low Profile High Pressure Sodium and Pulse Start Metal Halide

Class I, Division 2, Groups A, B, C, D
Class I, Zone 2, AEx nA nR IIC (Z2)
Class I, Zone 2, Ex nR IIC (Z) ¹
Class I, Zone 2, AEx nR IIC (ZB)

Class II, Division 1 and 2, Groups E, F, G
Class III
Simultaneous Exposure (Class I, Division 2/
Class II, Division 1)

Fixtures Outside Type (Salt Water)
Type 4X
IP66

Lamp		Supply Wire Min. Temp.	Ambient Temp. (°F/°C)	Class I, Division 2			Class II, Division 1 Groups E, F and G			Simultaneous Exposure Class I, Division 2 / Class II, Division 1		
Watts	Type			Globe	Globe & Reflector	Reflector	Globe	Globe & Reflector	Reflector	Globe	Globe & Reflector	Reflector
50	HPS	194/90	104/40	T3	T3	T3B	T4A	T4A	T5	T3	T3	T3
		194/90	131/55	T3	T3	T3A	T4A	T4A	T4A	T2D	T2D	T2D
		194/90	149/65	T3	T3	T3A	T4	T4	T4A	T2C	T2C	T2C
70	HPS	194/90	104/40	T3	T3	T3	T4	T4	T5	T2B	T2B	T2D
		194/90	131/55	T2D	T2D	T3	T3C	T3C	T4A	T2B	T2B	T2C
		194/90	149/65	—	—	T3	—	—	T4	—	—	T2B
100	HPS	194/90	104/40	T2C	T2C	T2D	T4	T4	T4A	T2B	T2B	T2B
		194/90	131/55	T2B	T2B	T2C	T3C	T3C	T4	T2A	T2A	T2A
		194/90	149/65	—	—	—	—	—	—	—	—	—
150	HPS	194/90	104/40	T2A	T2A	T2B	T3A *	—	T4	325	—	T2
50	PSMH	194/90	104/40	T3	T3	T3A	T4A	T4A	T6	T2D	T2D	T3
		194/90	131/55	T3	T3	T3	T4	T4	T5	T2C	T2C	T2D
		194/90	149/65	T3	T3	T3	T4	T4	T4A	T2B	T2B	T2D
70	PSMH	194/90	104/40	T3	T3	T3	T3C	T3C	T4A	T2B	T2B	T2C
		194/90	131/55	T2D	T2D	T3	T3C	T3C	T4A	T2A	T2A	T2B
		230/110	149/65	—	—	T3	—	—	T4	—	—	T2B
100	PSMH	194/90	104/40	T2A	T2A	T2B	T3B	T3B	T4A	T2	T2	T2A
		194/90	131/55	T2A	T2A	T2B	T3A *	T3A *	T4	T1	T1	T2
150	PSMH	230/105	104/40	350	350	325	—	—	T3B	—	—	T1
175	PSMH	230/105	104/40	350	350	325	—	—	T3B	—	—	T1
175	MH ¹	230/110	104/40	—	—	325	—	—	T3B	—	—	—
60	Inc.	194/90	104/40	T3B	T3B	T3C	—	—	—	—	—	—
		194/90	131/55	T3A	T3A	T3C	—	—	—	—	—	—
		194/90	149/65	T3A	T3A	T3C	—	—	—	—	—	—
100	Inc.	194/90	104/40	T3	T3	T3	—	—	—	—	—	—
		194/90	131/55	T3	T3	T3	—	—	—	—	—	—
		194/90	149/65	T2D	T2D	T3	—	—	—	—	—	—
150	Inc.	194/90	104/40	T2D	T2D	T3	—	—	—	—	—	—
		194/90	131/55	T2B	T2B	T2D	—	—	—	—	—	—
		194/90	149/65	T2B	T2B	T2D	—	—	—	—	—	—

"T" Numbers Represent the Maximum Lamp Temperature for Class I, Division 2 Locations and Maximum Surface Temperature Under Dust Blanket for Class II, Division 1 Locations.

"T" #	T1	350	325	T2	T2A	T2B	T2C	T2D	T3	T3A	T3B	T3C	T4	T4A	T5	T6
Temp. Range (°F)	664-842	619-662	574-617	538-572	502-536	448-500	421-446	394-419	358-392	331-356	322-329	277-320	250-275	214-248	187-212	185
Temp. Range (°C)	351-450	326-350	301-325	281-300	261-280	231-260	216-230	201-215	181-200	166-180	161-165	136-160	121-135	101-120	86-100	85

* "T" numbers are for Groups E and F only.

¹ CSA Certification only.

Mercmaster™ III Low Profile Luminaires

50 W - 175 W PSMH

High Power Factor (min. P.F. 90%). Medium base lamps.

Class I, Division 2, Groups A, B, C, D
Class I, Zone 2, AEx nA nR IIC (Z2)
Class I, Zone 2, Ex nR IIC (Z) ¹
Class I, Zone 2, AEx nR IIC (ZB)

Class II, Division 1 and 2, Groups E, F, G
Class III
Simultaneous Exposure (Class I, Division 2/
Class II, Division 1)

Fixtures Outside Type (Salt Water)
Type 4X
IP66

Lighting

LIGHTING: ENCLOSED AND GASKETED — AREA — HID

			Hub Size	Catalog Numbers ②④⑤⑥	
	Lamp Type	Lamp Watts	(Inches)	With Globe	With Type V 8" Refractor ②
Wall — Five Hubs, Four Close-Up Plugs					
	PSMH	50	3/4 1	MLWH502G1N MLWH503G1N	MLWH502J5N MLWH503J5N
	PSMH	70	3/4 1	MLWH702G1N MLWH703G1N	MLWH702J5N MLWH703J5N
	PSMH	100	3/4 1	MLWH102G1N MLWH103G1N	MLWH102J5N MLWH103J5N
	PSMH	150	3/4 1	MLWP152G1N MLWP153G1N	MLWP152J5N MLWP153J5N
	Shown with Refractor and Optional Guard	PSMH	175	3/4 1	MLWP172G1N MLWP173G1N
25° Stanchion — One Hub					
	PSMH	50	1-1/4 1-1/2	MLSH504G1N MLSH505G1N	MLSH504J5N MLSH505J5N
	PSMH	70	1-1/4 1-1/2	MLSH704G1N MLSH705G1N	MLSH704J5N MLSH705J5N
	PSMH	100	1-1/4 1-1/2	MLSH104G1N MLSH105G1N	MLSH104J5N MLSH105J5N
	PSMH	150	1-1/4 1-1/2	MLSP154G1N MLSP155G1N	MLSP154J5N MLSP155J5N
	Shown with Globe and Optional Guard	PSMH	175	1-1/4 1-1/2	MLSP174G1N MLSP175G1N
90° Stanchion — One Hub					
	PSMH	50	1-1/4 1-1/2	MLRH504G1N MLRH505G1N	MLRH504J5N MLRH505J5N
	PSMH	70	1-1/4 1-1/2	MLRH704G1N MLRH705G1N	MLRH704J5N MLRH705J5N
	PSMH	100	1-1/4 1-1/2	MLRH104G1N MLRH105G1N	MLRH104J5N MLRH105J5N
	PSMH	150	1-1/4 1-1/2	MLRP154G1N MLRP155G1N	MLRP154J5N MLRP155J5N
	Shown with Refractor and Optional Guard	PSMH	175	1-1/4 1-1/2	MLRP174G1N MLRP175G1N

① For Flexible Pendant Mount, change **A** to **F** in catalog number (except 50 W HPS).

② To order fixture with NEMA Type I or NEMA Type III refractor, change final digit **5** in catalog number to **1** or **3**.

③ For fixtures with guards, substitute a **G** for the **N** before adding voltage suffix. See following pages for accessory ordering information.

④ Add the following voltage and frequency designation before **Z2** suffix:

		Voltage Suffixes													
Lamp Type	Lamp Watts	LB	MT	5MT	48	125	225	226	235	245	C2 ¹	C3 ¹	C6 ¹	C7 ¹	TT ¹
Inc.	150 Max.	X	—	—	—	—	—	—	—	—	—	—	—	—	—
HPS	50	—	X	—	—	—	X	X	—	X	—	—	—	—	X
HPS	70	—	X	—	X	X	X	X	—	X	—	—	—	—	X
HPS	100	—	X	—	X	X	X	X	—	X	—	—	—	—	X
HPS	150	—	X	—	X	X	X	X	—	X	X	X	X	X	X
PSMH	50	—	X	—	X	—	—	—	—	—	—	—	—	—	X
PSMH	70	—	X	—	X	X	X	—	—	X	—	—	—	—	X
PSMH	100	—	X	—	X	X	X	—	—	X	—	—	—	—	X
PSMH	150	—	X	—	X	—	—	—	—	X	—	—	—	—	X
PSMH	175	—	X	X	X	—	—	—	—	X	—	—	—	—	X
MH ¹	175	—	X	—	—	—	—	—	—	—	X	X	X	X	X

Voltages:

LB - Incandescent, 120 V 60 Hz

MT - 120/208/240/277 V 60 Hz

5MT - 120/208/240/277/480 V 60 Hz

48 - 480 V 60 Hz

125 - 120 V 50 Hz

225 - 225 V 50 Hz

226 - 220 V 60 Hz

235 - 230 V 50 Hz

245 - 240 V 50 Hz

C2 - 208 V 60 Hz, CWI ¹

C3 - 240 V 60 Hz, CWI ¹

C6 - 480 V 60 Hz, CWI ¹

C7 - 600 V 60 Hz, CWI ¹

TT - 120/277/347 V 60 Hz, CWA ¹

⑤ Add **Z2** suffix for factory sealed non-sparking/restricted breathing protection (AEx nA nR). Add **ZB** suffix for restricted breathing protection (AEx nR).

⑥ Add **Z** for factory sealed restricted breathing protection (Ex nR) ¹.

⑦ For 150 W HPS fixtures, use S-55 lamp type only.

¹ CSA Certification Only.

930

 **Appleton®**

Visit our website at www.appletonelec.com or contact us at (800) 621-1506.

© October 2012

Mercmaster™ III Low Profile Luminaire Electrical Specifications and Fuse Kits

High Pressure Sodium and Pulse Start Metal Halide

Listed for simultaneous exposure to combustible dusts and flammable gases or vapors.

Class I, Division 2, Groups A, B, C, D
Class I, Zone 2, AEx nA nR IIC (Z2)
Class I, Zone 2, Ex nR IIC (Z) ¹/₁
Class I, Zone 2, AEx nR IIC (ZB)

Class II, Division 1 and 2, Groups E, F, G
Class III
Simultaneous Exposure (Class I, Division 2/
Class II, Division 1)

Fixtures Outside Type (Salt Water)
Type 4X
IP66

Electrical Specifications

Line Voltage	Type of Ballast ¹	Starting Amps	Operating Amps	Total Watts
50 Watt High Pressure Sodium				
120	HX-HPF	0.58	0.58	64
208	HX-HPF	0.35	0.33	64
240	HX-HPF	0.31	0.29	64
277	HX-HPF	0.25	0.25	64
347 ¹ / ₁	HX-HPF	0.26	0.21	68
70 Watt High Pressure Sodium				
120	HX-HPF	0.90	0.82	94
208	HX-HPF	0.50	0.48	94
240	HX-HPF	0.44	0.41	94
277	HX-HPF	0.35	0.36	94
347 ¹ / ₁	HX-HPF	0.30	0.30	94
480	HX-HPF	0.21	0.21	94
100 Watt High Pressure Sodium				
120	HX-HPF	1.30	1.15	130
208	HX-HPF	0.76	0.67	130
240	HX-HPF	0.66	0.60	130
277	HX-HPF	0.60	0.52	130
347 ¹ / ₁	HX-HPF	0.45	0.39	130
480	HX-HPF	0.33	0.31	135
480	C.W.I.	0.17	0.30	130
600	C.W.I.	0.14	0.24	130
150 Watt High Pressure Sodium ²				
120	HX-HPF	2.00	1.70	188
208	HX-HPF	1.15	0.95	188
240	HX-HPF	1.00	0.85	188
277	HX-HPF	0.85	0.72	188
347 ¹ / ₁	HX-HPF	0.52	0.56	188
480	HX-HPF	0.50	0.47	189
480	C.W.I.	0.25	0.42	190
600	C.W.I.	0.19	0.35	190
50 Watt Pulse Start Metal Halide				
120	HX-HPF	0.87	0.62	67
208	HX-HPF	0.51	0.40	67
240	HX-HPF	0.47	0.35	67
277	HX-HPF	0.32	0.32	67
347 ¹ / ₁	HX-HPF	0.15	0.20	67
70 Watt Pulse Start Metal Halide				
120	HX-HPF	0.80	0.85	95
208	HX-HPF	0.50	0.52	95
240	HX-HPF	0.43	0.44	95
277	HX-HPF	0.39	0.39	95
347 ¹ / ₁	HX-HPF	0.20	0.28	88
480	HX-HPF	0.26	0.23	95
100 Watt Pulse Start Metal Halide				
120	HX-HPF	1.20	1.15	130
208	HX-HPF	0.70	0.70	130
240	HX-HPF	0.61	0.58	130
277	HX-HPF	0.55	0.50	130
347 ¹ / ₁	HX-HPF	0.40	0.40	129
480	HX-HPF	0.30	0.35	140

Electrical Specifications

Line Voltage	Type of Ballast ¹	Starting Amps	Operating Amps	Total Watts
150 Watt Pulse Start Metal Halide				
120	HX-HPF	1.75	1.60	188
208	HX-HPF	1.30	1.00	188
240	HX-HPF	0.85	0.80	188
277	HX-HPF	0.77	0.70	188
347 ¹ / ₁	Super C.W.A.	0.65	0.55	185
480	Super C.W.A.	0.45	0.42	185
175 Watt Pulse Start Metal Halide				
120	Super C.W.A.	0.90	1.78	199
208	Super C.W.A.	0.50	1.08	199
240	Super C.W.A.	0.35	0.89	199
277	Super C.W.A.	0.30	0.76	199
347 ¹ / ₁	Super C.W.A.	0.25	0.65	208
480	Super C.W.A.	0.25	0.50	213
175 Watt Metal Halide ¹/₁				
120	C.W.A.	1.30	1.80	210
208	C.W.A.	0.75	1.04	210
240	C.W.A.	0.65	0.90	210
277	C.W.A.	0.55	0.80	210
347	C.W.A.	0.50	0.65	210
480	C.W.I.	0.20	0.45	215
600	C.W.I.	0.16	0.37	215
Fuse Kit for Field Installation				
Lamp Watts	Volts	Fuse Quantity Required	Fuse Kit Catalog Number HPS	PSMH
50W	120	1	F5	F3
	208	2	F3	F3
	240	2	F3	F2
	277	1	F2	F2
	347 ¹ / ₁	1	F1	F1
70W	120	1	F5	F4
	208	2	F3	F3
	240	2	F3	F3
	277	1	F2	F2
	347 ¹ / ₁	1	F1	F2
100W	480	2	F2	F1
	120	1	F8	F6
	208	2	F5	F4
	240	2	F5	F3
	277	1	F3	F3
150W	347 ¹ / ₁	1	F1	F2
	480	2	F3	F2
	120	1	F10	F10
	208	2	F5	F5
	240	2	F5	F5
175W	277	1	F5	F4
	347 ¹ / ₁	1	F2	F2
	480	2	F3	F3
	120	1	—	F5
	208	2	—	F3
	240	2	—	F3
	277	1	—	F2
	347 ¹ / ₁	1	F2	F2
	480	2	—	F2

¹ C.W.A. – Constant Wattage Autotransformer. HX-HPF – High Reactance High Power Factor Autotransformer. Super C.W.A. – Super Constant Wattage Autotransformer.


² 150 W HPS units equipped with ballasts to operate 55 V lamps only.

¹/₁ CSA Certification Only.

Mercmaster™ III Low Profile Luminaire Dimensions and Weights

High Pressure Sodium and Pulse Start Metal Halide

Listed for simultaneous exposure to combustible dusts and flammable gases or vapors.

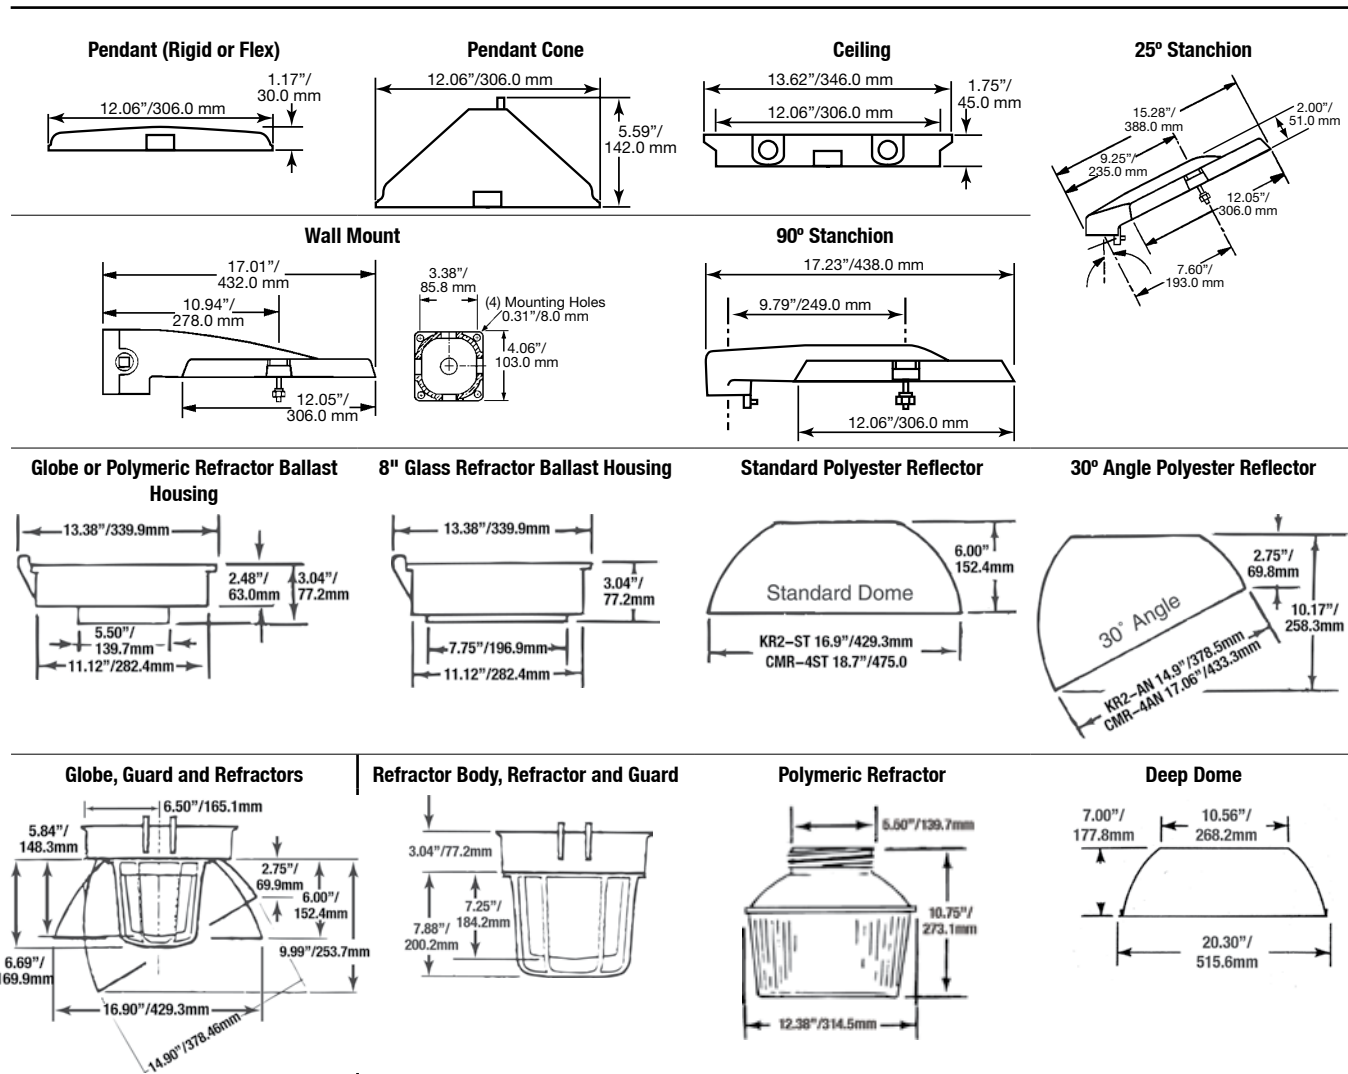

Mercmaster III Low Profile Ballast and Accessory Weights ❶

Globe Housing Ballast (Wt. Lbs/Kg)		Refractor Housing Ballast (Wt. Lbs/Kg)		Mounting Hoods	Wt. Lbs/Kg	Refractors, Globes, Guards and Reflectors	Wt. Lbs/Kg
Watts	HPS	PSMH	HPS				
50	7.25/3.3	7.00/3.2	7.75/3.5	7.50/3.4	Pendant	8" Glass Refractor	5.25/2.4
70	8.25/3.7	7.75/3.5	8.75/4.0	8.25/3.7	Pendant Cone	Glass Globe	3.75/1.7
100	9.75/4.4	9.25/4.2	10.25/4.6	9.75/4.4	Ceiling	Refractor Guard	1.00/0.5
150	10.75/4.9	10.75/4.9	11.25/5.1	11.25/5.1	Wall	Globe Guard	1.00/0.5
175	—	11.00/5.0	—	11.50/5.2	25° Stanchion	Standard Dome	2.50/1.1
					90° Stanchion	Deep Dome	5.00/2.3
						30° Angle	2.50/1.1
						Polymeric Refractor	2.43/1.1

❶ Weights are approximate. Add 0.25 lbs/0.1 kg for Quartz option.

Mercmaster™ III Low Profile Luminaire Photometric Data

100 W PSMH


Listed for simultaneous exposure to combustible dusts and flammable gases or vapors.

* Photometric data is based on a fixture with a 100-watt clear Pulse Start Metal Halide lamp (8,500 lumen).

For candlepower values of fixtures with other PSMH lamps, use the following multipliers: for a 50 W (3400 lumen) PSMH lamp – 0.40; for a 70 W (5600 lumen) PSMH lamp – 0.66; for a 150 W (10,500 lumen) PSMH lamp – 1.24; for a 175 W (17,500 lumen) PSMH lamp – 2.06.

For candlepower values of fixture with guard, multiply by – 0.95.

Zone	Lumens	Total Luminaire Efficiency = 85.7%	
0-10	21.19	CIE Type – Semi-Direct	
10-20	93.55	Plane	Spacing Criteria
20-30	201.68		
30-40	291.92	0-180	3.20
40-50	523.42	90-270	3.20
50-60	637.38	Diagonal	3.08
60-70	732.34		
70-80	845.58	Zonal Lumen Summary	
80-90	874.42	Zone	Lumens % Lamp % Fixture
90-100	870.80	0-30	316.42 4.1 4.7
100-110	809.33	0-40	608.33 7.8 9.1
110-120	643.44	0-60	1769.13 22.7 26.5
120-130	139.00	0-90	4221.46 54.1 63.2
130-140	0.71	90-120	2323.56 29.8 34.8
140-150	0.00	90-130	2462.56 31.6 36.8
150-160	0.00	90-150	2463.27 31.6 36.8
160-170	0.00	90-180	2463.27 31.6 36.8
170-180	0.00	0-180	6684.73 85.7 100.0

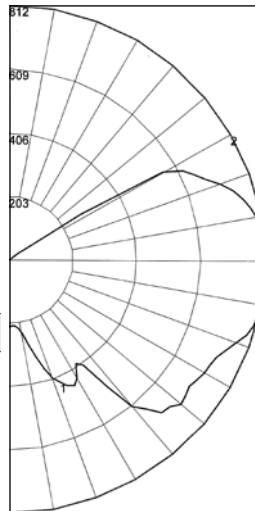

REPORT NUMBER: **ML10HG**


Lamps: 100 W Pulse Start Metal Halide with Globe only *

Coefficients of Utilization – Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

% Ceiling Rcc		80				70				50				30				10				0
% Walls	Rw	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
	0	95	95	95	95	89	89	89	89	78	78	78	68	68	68	58	58	58	54			
	1	81	74	69	64	75	69	64	60	60	56	52	51	48	45	43	40	38	34			
	2	71	62	54	48	66	57	50	45	49	43	39	41	37	33	34	31	28	24			
	3	64	52	44	37	59	49	41	35	41	35	30	35	30	26	29	25	21	18			
	4	57	45	37	30	53	42	34	28	36	29	24	30	25	20	25	20	17	14			
	5	52	40	31	25	48	37	29	23	31	25	20	26	21	17	21	17	14	11			
	6	48	35	27	21	44	33	25	19	28	21	17	23	18	14	19	15	11	9			
	7	44	31	23	17	40	29	22	16	25	19	14	21	16	12	17	13	10	7			
	8	41	28	20	15	37	26	19	14	22	16	12	19	14	10	16	11	8	6			
	9	38	26	18	13	35	24	17	12	20	15	11	17	12	9	14	10	7	5			
	10	35	23	16	12	32	22	15	11	19	13	9	16	11	8	13	9	6	5			

Zone	Lumens	Total Luminaire Efficiency = 75.8%	
0-10	116.29	CIE Type – Direct	
10-20	371.61	Plane	Spacing Criteria
20-30	692.88		
30-40	821.73	0-180	1.70
40-50	1064.03	90-270	1.70
50-60	1154.58	Diagonal	1.84
60-70	1134.19		
70-80	470.22	Zonal Lumen Summary	
80-90	83.66	Zone	Lumens % Lamp % Fixture
90-100	0.82	0-30	1180.78 15.1 20.0
100-110	0.00	0-40	2002.50 25.7 33.9
110-120	0.00	0-60	4221.11 54.1 71.4
120-130	0.00	0-90	5909.17 75.8 100.0
130-140	0.00	90-120	0.82 0.0 0.0
140-150	0.00	90-130	0.82 0.0 0.0
150-160	0.00	90-150	0.82 0.0 0.0
160-170	0.00	90-180	0.82 0.0 0.0
170-180	0.00	0-180	5910.00 75.8 100.0

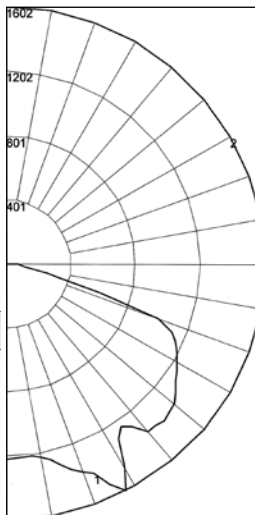

REPORT NUMBER: **ML10HST**

Lamps: 100 W Pulse Start Metal Halide with Standard Dome Reflector *

Coefficients of Utilization – Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

% Ceiling Rcc		80				70				50				30				10				0
% Walls	Rw	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
	0	90	90	90	90	88	88	88	88	84	84	84	81	81	81	77	77	77	76			
	1	82	78	74	71	80	76	73	70	73	70	68	70	68	66	67	65	64	62			
	2	73	66	61	56	71	65	60	55	62	58	54	60	56	53	57	54	51	50			
	3	66	57	50	45	64	56	50	45	54	48	44	51	47	43	49	46	42	40			
	4	60	50	43	37	58	49	42	37	47	41	36	45	40	36	43	39	35	33			
	5	54	44	36	31	53	43	36	31	41	35	30	40	34	30	38	33	30	28			
	6	50	39	32	26	48	38	31	26	37	31	26	35	30	26	34	29	25	24			
	7	46	35	28	23	45	34	27	23	33	27	22	32	26	22	31	26	22	20			
	8	43	32	25	20	41	31	24	20	30	24	20	29	24	20	28	23	19	18			
	9	40	29	22	18	38	28	22	18	27	22	17	27	21	17	36	21	17	16			
	10	37	26	20	16	36	26	20	16	25	20	16	24	19	16	24	19	15	14			