

McGILL® 0851/0861 Series Lighted Rocker Switches

Black Bezel, White Rocker, Red Lens

Applications

- Recognized for reliable, long service life by appliance manufacturers and manufacturers of industrial and commercial equipment.

Features

- Designed to fit full-size rectangular cutouts. Angled corners are suggested for optimum fit, but standard rectangular cutouts are acceptable.
- Curved rockers with illuminated single or dual lens to fit your style and functional requirements.
- 1/4" Quick connect terminals standard on all switches.
- A variety of circuits are available to meet your specific requirements.
- 125 Vac incandescent lamp standard.
- Rocker style: white smooth gloss.
- Black gloss nylon snap-in bezel.

Standard Materials

- Contacts: silver plate
- Terminals: brass or copper
- Base: phenolic 302 °F/150 °C
- Rocker and nylon bracket: nylon 66 221 °F/105 °C




NEC/CEC Certifications and Compliances


- UL Recognized Component
- UL File Number: E335442
- UL Standard: 1054, Guide WORY2
- CSA File Number: 249055
- CSA Standard: C22.2 No. 55
- RoHS Compliant

Circuitry			Single Pole				Double Pole			
A	B	C	Lights	Lamp Voltage *	Poles	Catalog Number	Rating	Poles	Catalog Number	Rating
ON	—	OFF	1	125 Vac	SPST	0851-1301N		DPST	0861-1301N	
ON	—	ON	2	125 Vac	SPDT	0851-2303N	15 Amp, 125 Vac	DPDT	0861-2303N	15 Amp, 125 Vac
(ON)	—	OFF	1	125 Vac	SPST	0851-1304N	10 Amp, 250 Vac	DPST	0861-1304N †	10 Amp, 250 Vac
ON	—	(OFF)	1	125 Vac	SPST	0851-1307N	1/2 HP, 125 Vac	DPST	0861-1307N †	3/4 HP, 250 Vac
(ON)	—	ON	2	125 Vac	SPDT	0851-2308N	1/2 HP, 250 Vac	DPDT	0861-2308N †	
ON	OFF	ON	2	125 Vac	SPDT	0851-2302N	15 Amp, 125 Vac	DPDT	0861-2302N	15 Amp, 125 Vac
(ON)	OFF	(ON)	2	125 Vac	SPDT	0851-2305N †	10 Amp, 250 Vac	DPDT	0861-2305N †	10 Amp, 250 Vac
(ON)	OFF	ON	2	125 Vac	SPDT	0851-2306N †	3/4 HP, 125 Vac	DPDT	0861-2306N ‡	3/4 HP, 250 Vac


Dimensions in Inches/Millimeters

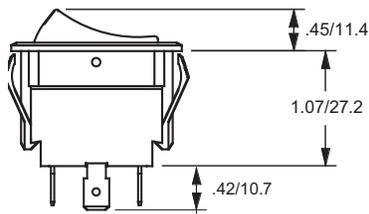

Side View



Top View



Mounting Hole

() Momentary. Poles: SP = single pole, DP = double pole, ST = single throw, DT = double throw.

* Lamp voltage determines switch volume rating.

† Not CSA or UL Approved.

‡ Not CSA Approved.

Shaded catalog numbers are normally stocked items. All other items are made to order. Contact your local sales representative for pricing.