

Scheduling Devices

Count Down

Wall Switch Timers

Features

- 30 minute timer
- Pre-set 5 button selection with permanent time markings
- Manual override to OFF
- Alert to OFF function - red LED will flash during the final 30 seconds
- Designed for use on 120 or 277V AC circuits

Ordering Information

Description	UPC Number	Catalog Number
Count down timer wall switch; settings: OFF, 5, 10, 20, 30 minutes	783585256399	DT5030LA

Listings

cULus listed to UL60730-1 and UL60730-2
Meets ASHRAE 90.1, and CEC Title 24 compliant


Specifications

Housing	Polycarbonate
Mounting Bracket	Aluminum
Wire Leads	6" 14AWG copper wire
Mounting Strap	Steel

Performance

Controls	
5 button selection	Preset time selection
LED Indicators	Illuminates once time is selected
OFF Switch	6 seconds to 20 minutes (default set to 10 minutes)
Electrical	
Load Capacity	120VAC, 600W Incandescent, 5A Ballast, 5A CFL/LED, 277V; Horsepower rating 1/6
Environmental	
Operating Temperature	32°F to 122°F (0°C to 50°C) with rate of change not exceeding 20°F(11°C) per hour -40°F to 150°F (-40°C to 65°C); 20% to 90% non condensing relative humidity
Storage	

HUBBELL

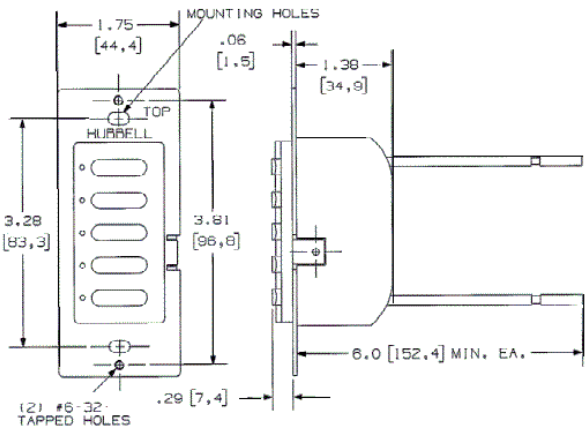

Complementary Products

Nylon Wallplate	NP26LA
SS Wallplate	SS26
Snap-On Wallplate	NPS26LA

Online Resources

Customer Use Drawing
eCatalog
Installation Instructions

