


B


A

B


A

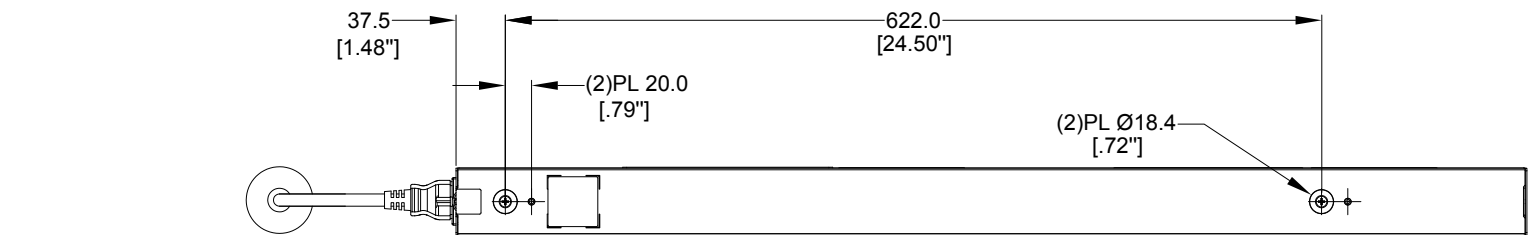


REAR VIEW

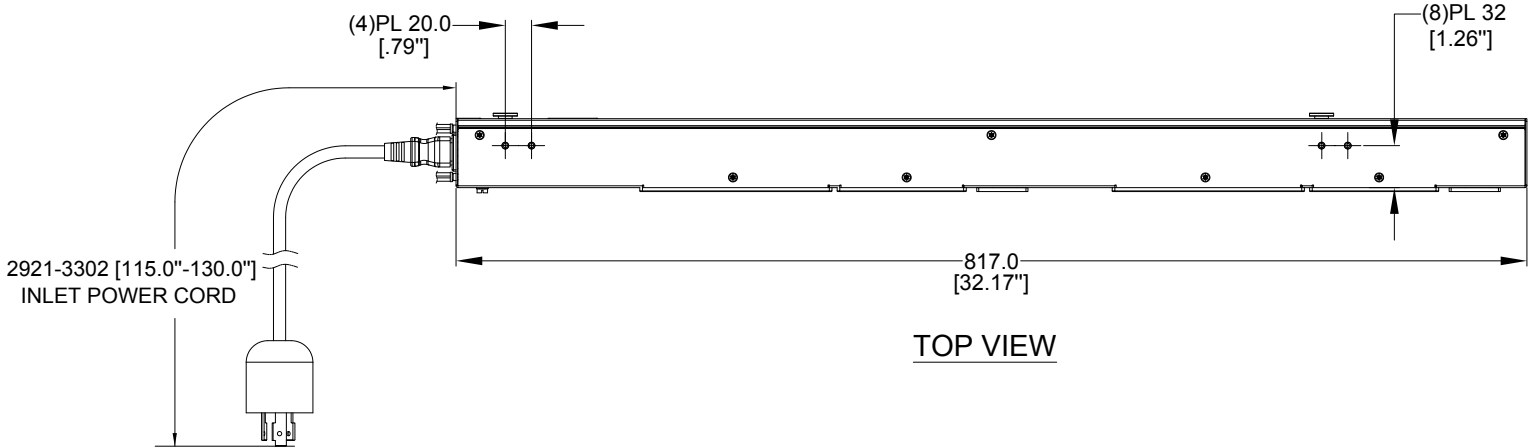


TOP VIEW

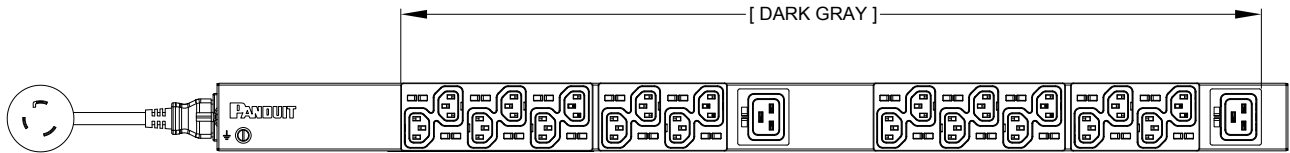


FRONT VIEW



PLUG
20 AMP, 250V
TWIST LOCK
NEMA L6-20P



TWO (2)
RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C19

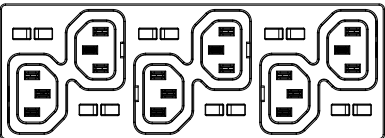


TWENTY (20)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C13

1

PANDUIT P/N	WEIGHT
P22B10M	2.0kg



NOTES:

1. IDENTIFICATION:
UNIT TYPE: BASIC
ORIENTATION: VERTICAL, HALF
OUTLET QTY&TYPE: (20) C13, (2) C19
BREAKER QTY&TYPE: N/A
INPUT VOLTAGE: 100-240VAC
INPUT CURRENT: 20A (16A DERATED)
INPUT PHASE: SINGLE-PHASE
RATED POWER: 3.3kVA
INPUT PLUG: NEMA L6-20P
INPUT CORD LENGTH: 3m [10']
2. ACCESSORIES:
POCKET GUIDE
3. RoHS COMPLIANT
4. VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR
ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE
SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF
PRODUCTS APPLICABLE FOR USE WITH THIS PART
5. MAXIMUM ALLOWABLE INPUT POWER = 3.3kW
6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL,
STATE, AND LOCAL CODES

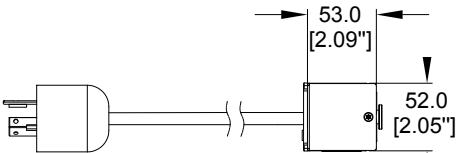

SIDE VIEW

01B	08/21/2017	ZHAI	MIM	EDM	REVISED TOLERANCES	P22B10M
01A	06/28/2017	ZHAI	MIM	EDM	INITIAL RELEASE	P22B10M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN	
		DATE	
		PRINT	
TITLE			
BASIC SERIES PDU P22B10M CUSTOMER DRAWING			
ITEM REVISION NAME			
DATASHEET FILE NAME:			
 THIRD ANGLE PROJECTION		MATERIAL/COLOR:	
		N/A	
		DRAWING NUMBER:	
		P22B10M_DC	
DRAWN BY	DATE	CHK	SCALE
DI.ZHAI	05/24/2017	SEAN	NONE
		SHT 1 OF 1	
		SCALE B	

2

2

1