


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

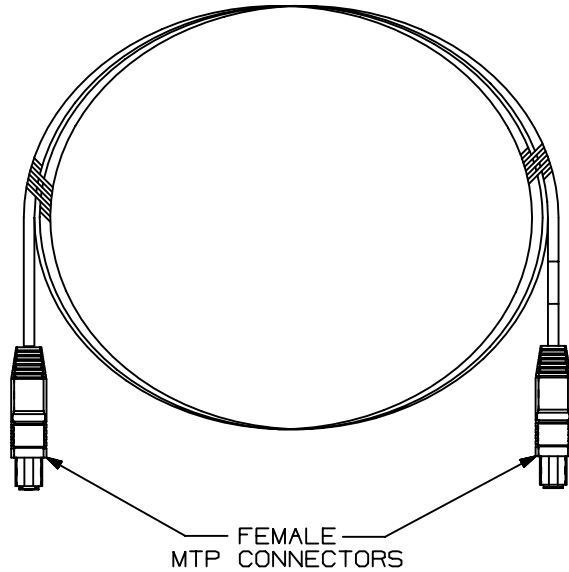

PART NUMBER	DESCRIPTION	AVAILABLE LENGTHS
F912D5-5M*	12 FIBER 9/125um SINGLEMODE QUICKNET MTP TO MTP	1,2,3,4,5,6,7,8,9,10,15,20,25,30
FX12D5-5M*	12 FIBER 50/125um 10 GbE QUICKNET MTP TO MTP	
F512D5-5M*	12 FIBER 50/125um MULTIMODE QUICKNET MTP TO MTP	
F612D5-5M*	12 FIBER 62.5/125um MULTIMODE QUICKNET MTP TO MTP	1,2,3,5,10
F64D5-5M*	4 FIBER 62.5/125um MULTIMODE MTP TO MTP	
F66D5-5M*	6 FIBER 62.5/125um MULTIMODE MTP TO MTP	
F68D5-5M*	8 FIBER 62.5/125um MULTIMODE MTP TO MTP	


NOTES:

1. ALL CABLE PLENUM RATED
2. ALL CONNECTORS MTP (FEMALE)
3. MAX. CONNECTOR LOSS: 0.75 dB
4. MIN. CONNECTOR RETURN LOSS: 55dB (SM);20dB (10GbE)
5. CABLE COLORS:
  - A. 9um: YELLOW;
  - B. 50um: ORANGE
  - C. 62.5um: ORANGE;
  - D. 50um 10GbE: AQUA
6. CONNECTOR COLORS:
  - A. SM: CONNECTOR - GREEN; BOOT - BLACK
  - B. MM: CONNECTOR - ELECTRIC IVORY; BOOT - BLACK
7. MAXIMUM CABLE LOSS:
  - A. SM: 0.5 dB/km
  - B. MM: 850nm - 3 dB/km; 1300nm - 1 dB/km
8. SEE CURRENT CATALOG FOR PACKAGE QUANTITY.
9. FOR LENGTHS OTHER THAN THOSE SHOWN, CONTACT YOUR PANDUIT SALES PERSON.
10. TESTED TO EIA/TIA 568-B.3.

FIBER OPTIC  
MTP TO MTP (FEMALE) PATCH CORD  
CUSTOMER DRAWING



**PANDUIT**™  
CORP.  
TINLEY PARK, ILL 60477



THIRD ANGLE  
PROJECTION

ALL DIMENSIONS ARE GIVEN IN INCHES  
UNLESS OTHERWISE SPECIFIED.  
DIMENSIONAL TOLERANCES ARE:  
(.X) (.XXX)±.010 (0.3)  
(.XX)±.03 (0.8) ANGLES

DRAWING FILENAME  
M00929BM\_DC\_00C.prt

SCALE  
NONE

DRAWN BY  
MC

REVIEW DRAWING NUMBERS

PART NO.  
SEE TABLE

DATE  
10-10-01

AS NOTED

DRAWING NO.  
00929-18

SIZE  
A

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
2	05-13-05	MC		RELEASED TO PRODUCTION	00929-18				