
Carlon[•]

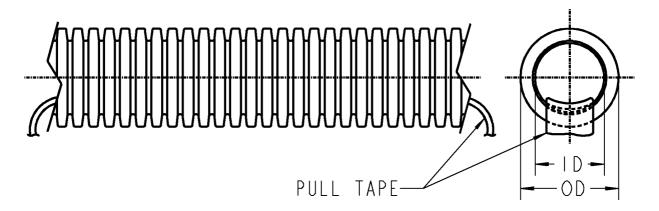

PART NUMBER	SIZE	O.D. NOMINAL	I.D. MIN (REF)	WALL THICKNESS MIN / MAX	
CD4X _ C	1/2"	.83 [21,0]	.60 [15,2]	.01 [.25] / .03 [.64]	
CE4X _ C	3/4"	1.04 [26,3]	.74 [18.8]	.01 [.25] / .03 [.64]	
CF4X _ C	"	1.30 [33,1]	1.00 [25,4]	.01 [.25] / .03 [.64]	
CG4X _ C	/4"	1.64 [41,7]	1.35 [34,3]	.01 [.25] / .03 [.64]	
CH4X _ C	1 1/2"	1.88 [47,7]	1.50 [38,1]	.01 [.25] / .03 [.64]	
CJ4X _ C	2"	2.34 [59,4]	2.00 [50,8]	.01 [.25] / .03 [.64]	
CL4X _ C	3"	3.44 [87,3]	3.00 [76,2]	.01 [.25] / .03 [.64]	

PART NUMBER EXAMPLES: CD4XIC-1500, CD4XI-1500 AND CE4XI-1000S

NOTES:

- I) MATERIAL: POLYVINYLIDENE FLUORIDE (PVDF)
- 2) "LENGTH" VARIES, PER ORDER AND APPEARS AS A SUFFIX
- 3) UNDERSCORE POSITION DENOTES: COLOR
 - I (ORANGE), 2 (BLACK), 3 (GREY), 4 (WHITE
 - 5 (BLUE), 6 (RED, 7 (YELLOW) AND 8 (GREEN).
- 4) "C" ON THE END ON PART NUMBER DENOTES PULLTAPE
 - A "BLANK" IN THAT POSITION, SIGNIFIES: NO PULL TAPE
- 5.) AN "S" FOLLOWING THE LENGTH (IE: CE4XIC-1500S) INDICATES THE CONDUIT IS SPLIT

GENERAL NOTES				Thomas@Betts	
I. ALL DIMENSIONS ARE FOR REFERENCE ONLY. 2. DIMENSIONS IN BRACKETS []	www.tnb.com			A Member of the ABB Group	
ARE IN METRIC UNITS.	DESCRIPTION: P\	PVDF PLENUM-GARD			
REVISIONS	FIBER OPTIC CORRUGATED CONDUIT				
0 SEE ERN (****)	TIBLIT OF THE CONTROL CONDOIT				
FOR APPROVAL SIGNATURES	ORIGINAL PROJECT NO / (ERN NO)	SHEET NO:	REV. NO:	DRAWING NO:	
& RELEASE DATE. PROJECT NO: ****	5AM0000010 / (2017003)	1 OF 1	0	WSD-001576	