

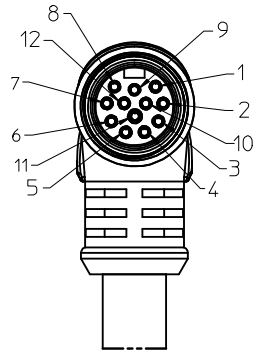


PART NUMBER	ENGINEERING NO.	LENGTH
1300080279	302101A04M050	5M +150 -0 (16'5" +6.00 -0")
1300080282	302101A01M100	10M +300 -0 (32'-0" +12.0" -0")

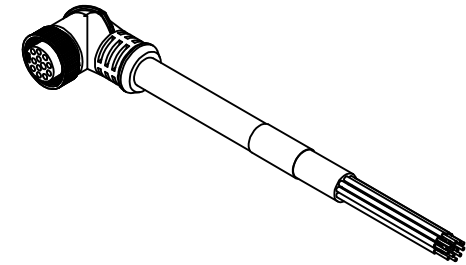

Partial1  
Scale 1:1

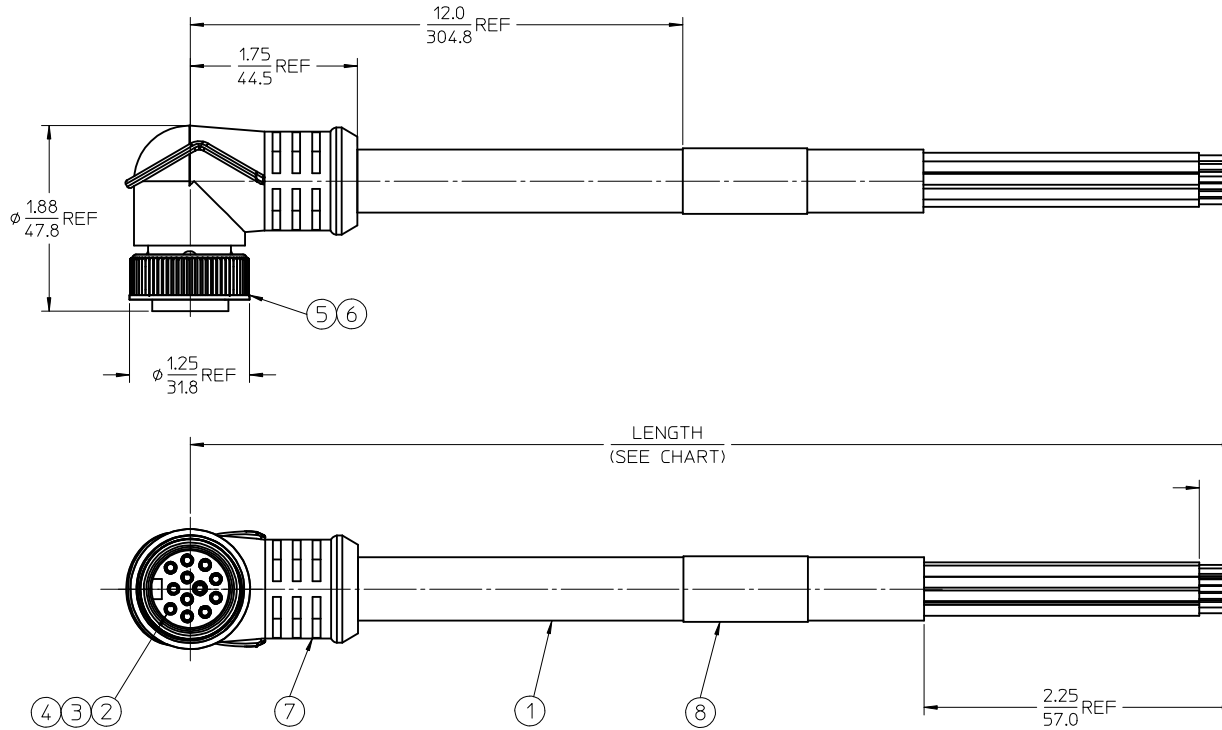

.38  
9.53  
OPTIONAL

P1	
1	WHITE
2	GREEN
3	YELLOW
4	GRAY
5	PINK
6	RED
7	BLACK
8	VIOLET
9	GREEN/YELLOW
10	BROWN
11	BLUE
12	NO CONNECTION

WIRING DIAGRAM

- NOTES:
1. MATERIAL: SEE TABLE
  2. FINISHES: SEE TABLE
  3. CABLE ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
  4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
  5. MATES WITH: MINI CHANGE, C-SIZE 12 POLE RECEPTACLE
  6. ELECTRICAL SPECIFICATIONS:  
VOLTAGE RATING: 600V  
CURRENT RATING: 2.5 AMPS
  7. ASSEMBLY IS RoHS COMPLIANT

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
8	1	LABEL	PLASTIC FILM	BLACK/YELLOW
7	1	OVERMOLD	PVC	YELLOW
6	1	COUPLING NUT	ZINC DIE CAST	BLACK
5	1	FRICITION RING	NYLON	NATURAL
4	12	SOCKET CONTACT	BRASS	GOLD PLATED
3	12	SOCKET SLEEVE, 16 AWG	STAINLESS	
2	1	INSERT, FEMALE, 12 POLE	PVC	YELLOW
1	1	CABLE - YELLOW ST00W	PVC JACKET	YELLOW
			MATERIAL	FINISH

**NEW DOCUMENT**  
EC NO: WNAZ010-0094  
DRAWN: BRUPERT 2009/08/24  
CHKD: BRUPERT 2009/08/26  
APPR: JFMURPHY 2009/08/27

DESCRIPTION

REV: A

QUALITY SYMBOLS  
▽=0  
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0004
3 PLACES	± .005	± .0004
2 PLACES	± .005	± .0004
1 PLACE	± .005	± .0004

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE  
IN/MM

SCALE  
1:1

DESIGN UNITS  
INCH

THIRD ANGLE PROJECTION

DRAWN BY  
B. RUPERT

DATE  
2009/07/06

CHECKED BY  
B. WOODMAN

DATE  
2009/04/27

APPROVED BY  
JFMURPHY

DATE  
2009/08/26

MATERIAL NO.  
**SEE CHART**

SIZE  
C

MOLEX INCORPORATED

DOCUMENT NO.  
SD-130008-018

SHEET NO.  
1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION