



# **T5 Preheat**

## **F6T5/CW PH 25PK**

Philips T5 Fluorescent Lamps are incredibly powerful, environmentally responsible, long life lamps with an ultra-slim profile. This translates into reduced maintenance and disposal costs and also allows the use of smaller fixtures—which reduces ceiling clutter.

#### **Product data**

General Information			
Cap-Base	G5 [ G5]		
Life to 10% Failures (Nom)	5000 h		
Life to 50% Failures (Nom)	10000 h		
Life to 50% Failures Preheat (Nom)	10000 h		
System Description	na [ -]		
Light Technical			
Color Code	33-640		
Initial lumen (Nom)	260 lm		
Color Designation	Cool White (CW)		
Lumen Maintenance 10000 h (Nom)	58 %		
Lumen Maintenance 2000 h (Nom)	75 %		
Lumen Maintenance 5000 h (Nom)	70 %		
Correlated Color Temperature (Nom)	4100 K		
Luminous Efficacy (rated) (Nom)	43 lm/W		
Color Rendering Index (Nom)	60		
Operating and Electrical			
Power (Rated) (Nom)	6.0 W		
Lamp Current (Nom)	0.160 A		

Voltage (Nom)	42 V		
Controls and Dimming			
Dimmable	Yes		
Approval and Application			
Energy Efficiency Label (EEL)	В		
Mercury (Hg) Content (Nom)	4.4 mg		
Energy Consumption kWh/1000 h	7 kWh		
Product Data			
Order product name	F6T5/CW FAM/25		
EAN/UPC - Product	046677114633		
Order code	332411		
Numerator - Quantity Per Pack	1		
Numerator - Packs per outer box	25		
Material Nr. (12NC)	928000503321		
Net Weight (Piece)	21.000 g		
ILCOS Code	FD-6/41/2B-E-G5		


#### Warnings and Safety

• Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050

Datasheet, 2018, July 23 data subject to change

## **T5 Preheat**


### **Dimensional drawing**




Product	D (max)	A (max)	B (max)	B (min)	C (max)
F6T5/CW FAM/25	16 mm	212.1 mm	219.2 mm	216.8 mm	226.3 mm

#### TL Mini 6W/33-640

### Photometric data



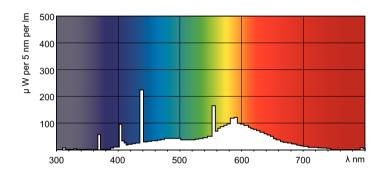

Lightcolor /33-640

Lightcolor /33-640

