

Rittal – The System.

Faster – better – everywhere.

Ground rail, vertical for TS – DK 7543.000

Date : May 25, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Ground rail, vertical for TS – DK 7543.000

created: 25.05.2018 build on www.rittal.com/us-en

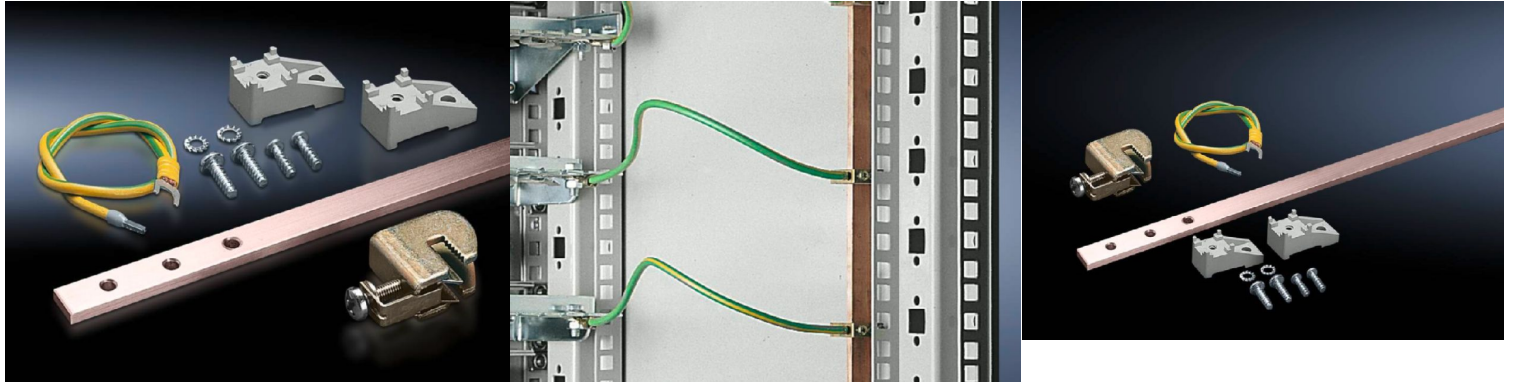

Product description

Description: Easy to mount on 25 mm DIN hole pattern on distributor or on 482.6 mm (19") punched rails. The supplied ground conductors facilitate star grounding of cable clamp straps on patch panels. The ground terminals are fully adjustable. Rail current carrying capacity approx. 200 A.

Supply includes: Ground rail made from E-Cu 57 to DIN EN 12 163, DIN EN 13 601, 15 x 5 mm
16 conductor connection clamps 2.5 – 16 mm²
15 grounding leads 6 mm², L = 500 mm
Fasteners

Product features

Suitable for: Enclosure type: TS
Height: 1200 mm (47 ")

Dimensions: Length: 945 mm (37 ")

Packaging unit: 1 pc(s).

Weight/packaging unit: 1.78 kg (3.9 lb.)

EAN: 4028177131835

Customs tariff number: 74199990

ETIM 6.0: EC000329

ETIM 5.0: EC000329

| | |
|------------------------------------|--|
| eCl@ss 8.0/8.1: | 27400605 |
| eCl@ss 7.0/7.1: | 27149205 |
| eCl@ss 6.0/6.1: | 27149205 |
| eCl@ss 5.1/5.1.4: | 27189215 |
| Product description (long): | DK Earth rail, vertical, L: 945 mm, For H: 1200 mm, For TS |
| Approvals | |
| Certificates: | EAC |