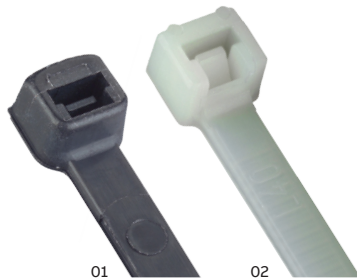


TECHNICAL DATA SHEET - INTERACTIVE PDF

Cable Tie, standard, 120lb series

Natural and UV resistant black

Catamount®


01

02

01 UV resistant (-0)
02 Natural (-9)

Ratings:

- Tensile Strength: 120lbs (534N)
- Min. Operating Temperature: -40°F (-40°C)
- Max. Operating Temperature: 185°F (85°C)
- Min. Installation Temperature: -4°F (-20°C)

Installation:

- Install with approved ABB cable tie tool such as [ERG120](#)


Materials / Finishes:

- Natural Polyamide (Nylon 6.6)
- UV-resistant black (Nylon 6.6)

Conforms to:

- AH-2 Plenum Rated
- UL94 V-2

Cable ties are primarily used to cinch wires and cables together to form a neat and organized bundle.

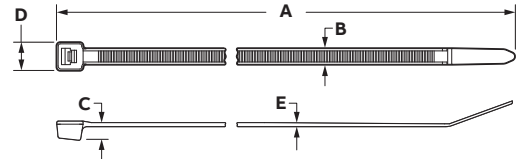Certifications / Standards:
3-Part Specification:
End User Tools


Product selection - in. (mm)							
Part no:	A ±0.25 (6.4)	B ±0.02 (0.5)	C ±0.06 (1.5)	D ±0.06 (1.5)	E ±0.02 (0.5)	Min. bundle dia.	Max. bundle dia.
L-14-120-0-C	8.7 (221)	0.3 (7.7)	0.29 (7.3)	0.49 (12.5)	0.08 (2.1)	0.178 (4.75)	4.06 (103.12)
L-14-120-0-L							
L-14-120-9-C							
L-14-120-9-L							

Note: Product must be installed in accordance with applicable national and local electrical codes.