Mini-Com® MuTOA 6-Port Outlet Box



specifications

MuTOA 6-Port Outlet Box shall deliver a 6-port multi-user telecommunication outlet assembly when used with three ½-sized sloped inserts, providing multimedia flexibility to open office environments. The expandable cable entry shall increase compatibility with various cable diameters that shall be secured in place by cable ties or heat shrink tubing. Mounting options shall consist of adhesive tape, optional magnet or screws. Two mounting eyelets shall help suspend the box in areas with limited wall surfaces.



technical information

Dimensions:	7.90"H x 1.81"W x 2.36"D (200.7mm x 46mm x 59.9mm) – with inserts
Mounting options:	Adhesive tape, optional magnet (CSBM-X), mounting eyelets or screws Screw holes spaced 4.70" (screws not supplied by Panduit)
Material:	Polycarbonate
Packaging:	Two cable ties, heat shrink tubing, adhesive tape, screws to secure cover to base

key features and benefits

Modularity	Accepts all Mini-Com® Modules for copper, fiber and A/V applications; modules snap in and out for easy moves, adds and changes
Expandable cable entry	Compatible with a variety of cable types and bundle sizes Opening will adjust from 0.695" (17.7mm) to .825" (21mm)
Mounting options	Mounts easily with adhesive tape, optional magnet or screws (not supplied by Panduit)
Mounting eyelets	Helps suspend the box in areas with limited wall space
Cable tie support slot	Facilitates quicker assembly and contributes to lower installed cost

applications

The Mini-Com® MuTOA 6-Port Outlet Box is ideal for open office environments that require design flexibility or experience frequent reconfigurations. It can be used in conjunction with pre-assembled cable runs that have been previously tested and labeled allowing faster, more economical and more

reliable installations. The Mini-Com® MuTOA 6-Port Outlet Box will accept up to three ½-sized sloped inserts, shuttered or non-shuttered (sold separately). Various mounting options provide installation flexibility for frequent office reconfigurations or challenging environments.

Mini-Com® MuTOA 6-Port **Outlet Box**

Outlet Box: CM6P**

Mini-Com® Inserts

Sloped insert: CHS2**-X Sloped shuttered

insert: Sloped shuttered

CHS2S**-X

insert with labels: CHLS2S**-X

Mini-Com® Copper Jack Modules

Category 6A: CJ6X88TG~ Category 6: CJ688TG^ Category 5e: CJ5E88TG^


Label Options:


Laser/ink jet: C125X030FJJ TDP43ME: C125X030YPT Panther™ LS8E: C125X030FJC

**To designate color, replace ** with suffix BL (Black), El (Electric Ivory), IG (International Gray), IW (Off White) or WH (White)

^To designate color, replace ^ with suffix AW (Arctic White), BL (Black), BU (Blue), EI (Electric Ivory), GR (Green), IG (International Gray), IW (Off White), OR (Orange), RD (Red), VL (Violet), WH (White), YL (Yellow). Add -24 to end of part number to designate a package of 24 jack modules; Add -C to end of part number to designate a package of 100 jack modules (100 packs not available for CJ5E88TG).

Mini-Com® MuTOA 6-Port Outlet Box

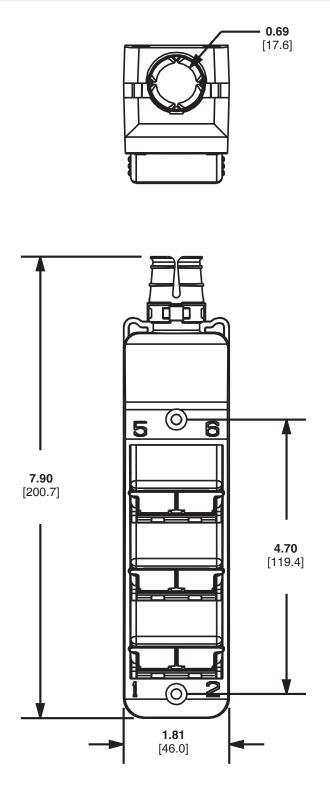

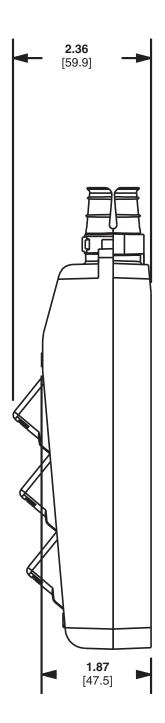

NOTE: Sloped inserts not included. Dimensions are in inches [Dimensions in brackets are metric]

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA Markham, Ontario cs-cdn@panduit.com Phone: 800.777.3300 PANDUIT EUROPE LTD. London, UK cs-emea@panduit.com Phone: 44.20.8601.7200 PANDUIT SINGAPORE PTE. LTD. Republic of Singapore cs-ap@panduit.com Phone: 65.6305.7575 PANDUIT JAPAN Tokyo, Japan cs-japan@panduit.com Phone: 81.3.6863.6000 PANDUIT LATIN AMERICA Guadalajara, Mexico cs-la@panduit.com Phone: 52.33.3777.6000 PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia cs-aus@panduit.com Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty



Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com or by phone: 800.777.3300 ©2013 Panduit Corp. ALL RIGHTS RESERVED. **OTSP34--WW-ENG** Replaces SA-NCSP15

