


Two-Hole Isolation Pad


- Use to provide electrical isolation between metallic fittings.
- See SB-2531 for kit.
- UL recognized material.
- UL 94 V0 Flame Resistance.
- Material: 1/16" (1.6mm) polyester fiberglass
- Finish Color: Red

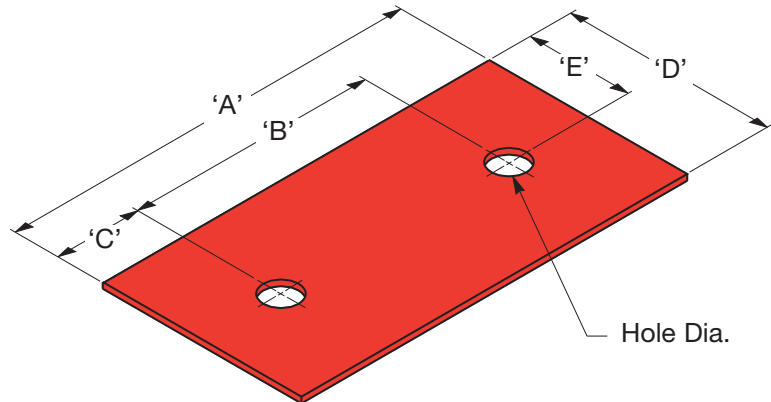

Part Number	'A'		'B'		'C'		'D'		'E'		Hole Diameter		Weight	
	In.	(mm)	In.	(mm)	In.	(mm)	In.	(mm)	In.	(mm)	In.	(mm)	Lbs.	(kg)
SB116301	4 ⁷ / ₁₆ "	(112)	2 ⁷ / ₁₆ "	(62)	1"	(25)	2 ¹ / ₈ "	(54)	1 ¹ / ₁₆ "	(27)	3 ⁸ / ₈ "	(9)	0.04	(0.02)
SB116302	3 ¹ / ₂ "	(89)	1 ¹ / ₂ "	(38)	1"	(25)	2 ¹ / ₈ "	(54)	1 ¹ / ₁₆ "	(27)	3 ⁴ / ₄ "	(19)	0.03	(0.01)
SB116303	6 ⁵ / ₈ "	(168)	4 ⁵ / ₈ "	(117)	1"	(25)	2 ¹ / ₈ "	(54)	1 ¹ / ₁₆ "	(27)	1 ¹ / ₁₆ "	(17)	0.06	(0.03)
SB116304	4 ⁵ / ₈ "	(117)	2 ⁵ / ₈ "	(66)	1"	(25)	2 ¹ / ₈ "	(54)	1 ¹ / ₁₆ "	(27)	9 ¹ / ₁₆ "	(14)	0.04	(0.02)
SB116305	4 ⁹ / ₁₆ "	(116)	2 ⁹ / ₁₆ "	(65)	1"	(25)	2 ³ / ₄ "	(70)	2 ⁹ / ₃₂ "	(58)	3 ⁸ / ₈ "	(9)	0.06	(0.03)
SB116306	4 ¹ / ₈ "	(105)	2 ¹ / ₈ "	(54)	1"	(25)	2 ¹ / ₈ "	(54)	1 ¹ / ₁₆ "	(27)	9 ¹ / ₁₆ "	(14)	0.04	(0.02)
SB116307	7 ³ / ₄ "	(197)	5 ³ / ₄ "	(146)	1"	(25)	2 ⁵ / ₈ "	(67)	1 ⁵ / ₁₆ "	(33)	5 ⁸ / ₈ "	(16)	0.09	(0.04)
SB116308	4 ⁹ / ₁₆ "	(116)	2 ⁹ / ₁₆ "	(65)	1"	(25)	7 ³ / ₄ "	(197)	2 ⁹ / ₃₂ "	(58)	3 ⁸ / ₈ "	(9)	0.16	(0.07)
SB116309	9 ¹ / ₈ "	(232)	2 ⁵ / ₈ "	(67)	1"	(25)	2 ¹ / ₈ "	(54)	1 ¹ / ₁₆ "	(27)	9 ¹ / ₁₆ "	(14)	0.09	(0.04)

Single-Hole Isolation Pad

- Use to provide electrical isolation between metallic fittings.
- See SB-2501 for kit.
- UL recognized material.
- UL 94 V0 Flame Resistance.
- Material: 1/16" (1.6mm) polyester fiberglass
- Finish Color: Red

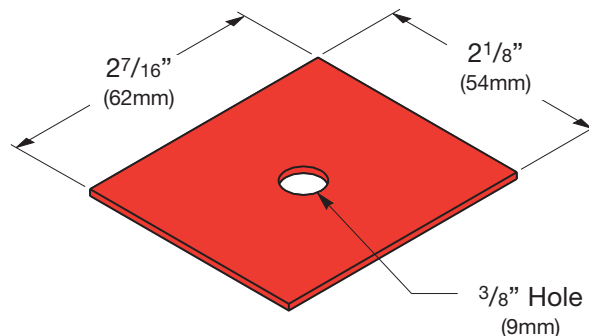

Part Number	Weight	
	Lbs.	(kg)
SB1162	0.03	(0.01)