


Universal 90° Vertical Bends

- Used to make a smooth, 90° vertical change in runway direction.
- Made of 1 1/2" x 3/8" ASTM A36 steel solid bar stringers and ASTM A513 Grade 1008 structural steel tubing rungs.
- All finishes are UL Classified as an equipment grounding conductor - file number E60548.
- Universal design to handle both inside and outside bends with one part.
- Four inside and outside rungs welded at 26° increments.
- Smooth 12" (305mm) inside radius.
- Connects to runway sections using standard runway splices.
- Slotted splice attachment holes provided for use with SB2135 series heavy duty splice plates.
- Provision for 1/4" grounding bolt provided on each corner.
- Compatible with "C"-channel, tubular, and solid bar cable runway.
- Range of widths from 6" (152mm) to 36" (914mm).
- Finish ____: Yellow Zinc (YZ), Telco Gray Powder Coat (TG) or Flat Black Powder Coat (FB)
(Other finishes are available upon request)

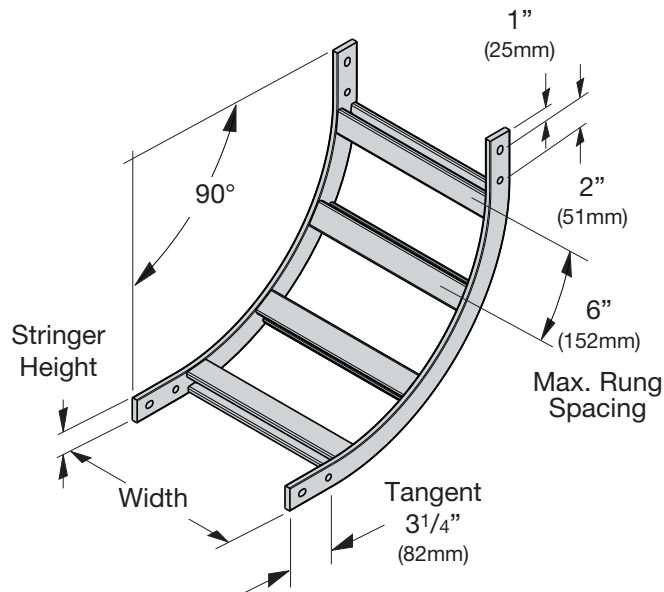

1 1/2" (38mm) Stringers

Part Number	Runway Width		Weight	
	In.	(mm)	Lbs.	(kg)
SB17VRB06 ____	6"	(152)	10.7	(4.85)
SB17VRB09 ____	9"	(228)	12.1	(5.49)
SB17VRB12 ____	12"	(305)	13.5	(6.12)
SB17VRB15 ____	15"	(381)	14.8	(6.71)
SB17VRB18 ____	18"	(457)	16.2	(7.35)
SB17VRB20 ____	20"	(508)	17.1	(7.75)
SB17VRB24 ____	24"	(609)	19.0	(8.62)
SB17VRB30 ____	30"	(762)	21.8	(9.89)
SB17VRB36 ____	36"	(914)	24.5	(11.11)