


4 3 2 1



MOUNTING DIMENSIONS

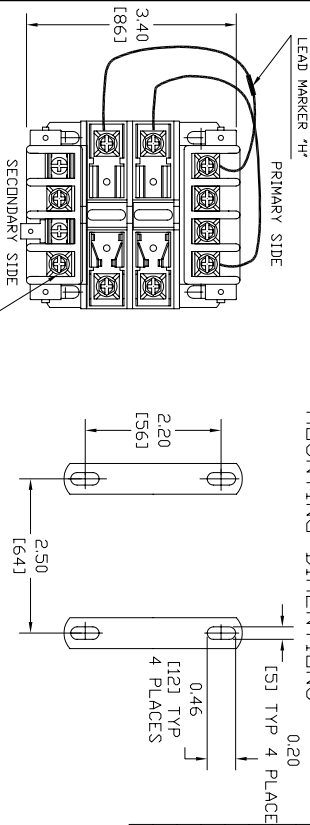

Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	50
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	4.3 LBS

TEST REQUIREMENTS	
WINDING	H4-H3-H2-H1 X3-X2-X1
D.C. VOLTS	216.9-240-480 28.3-127.3
L.O.A.D. VOLT/TS	217-240-480 2.00-120
F.L. AMPS	0.323/0.161 2.00/0.417
H.I.-P.O.T.	3000V 1800V
EXCITING AMPS	0.19AMPS @ 480V/D.L.T.S., 50HZ
EXCITING WATTS	100

TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEWS WASHER

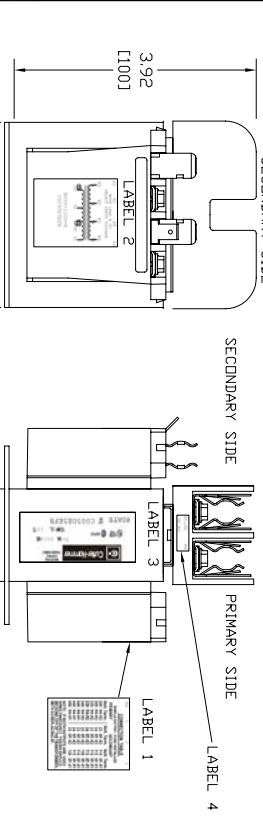


NOTE:
1. ALL MEASUREMENTS IN INCHES (MM)

3 CONNECTION TABLE

SINGLE OUTPUT - FUSE INSTALLED

PRIMARY	SECONDARY	1	2	3
VOLT. TERM.	VOLT. TERM.	VOLT. TERM.	VOLT. TERM.	VOLT. TERM.
230 H4-H3	24 XF-X2	115 XF-X1	230 H4-H3	24 XF-X2
220 H4-H2	23 XF-X2	115 XF-X1	220 H4-H2	23 XF-X2
210 H4-H1	24 XF-X2	115 XF-X1	210 H4-H1	24 XF-X2
200 H4-H2	23 XF-X2	115 XF-X1	200 H4-H2	23 XF-X2
190 H4-H1	24 XF-X2	115 XF-X1	190 H4-H1	24 XF-X2
180 H4-H2	23 XF-X2	115 XF-X1	180 H4-H2	23 XF-X2
170 H4-H1	24 XF-X2	115 XF-X1	170 H4-H1	24 XF-X2
160 H4-H2	23 XF-X2	115 XF-X1	160 H4-H2	23 XF-X2
150 H4-H1	24 XF-X2	115 XF-X1	150 H4-H1	24 XF-X2
140 H4-H2	23 XF-X2	115 XF-X1	140 H4-H2	23 XF-X2
130 H4-H1	24 XF-X2	115 XF-X1	130 H4-H1	24 XF-X2
120 H4-H2	23 XF-X2	115 XF-X1	120 H4-H2	23 XF-X2
110 H4-H1	24 XF-X2	115 XF-X1	110 H4-H1	24 XF-X2
100 H4-H2	23 XF-X2	115 XF-X1	100 H4-H2	23 XF-X2
90 H4-H1	24 XF-X2	115 XF-X1	90 H4-H1	24 XF-X2
80 H4-H2	23 XF-X2	115 XF-X1	80 H4-H2	23 XF-X2
70 H4-H1	24 XF-X2	115 XF-X1	70 H4-H1	24 XF-X2
60 H4-H2	23 XF-X2	115 XF-X1	60 H4-H2	23 XF-X2
50 H4-H1	24 XF-X2	115 XF-X1	50 H4-H1	24 XF-X2
40 H4-H2	23 XF-X2	115 XF-X1	40 H4-H2	23 XF-X2
30 H4-H1	24 XF-X2	115 XF-X1	30 H4-H1	24 XF-X2
20 H4-H2	23 XF-X2	115 XF-X1	20 H4-H2	23 XF-X2
10 H4-H1	24 XF-X2	115 XF-X1	10 H4-H1	24 XF-X2

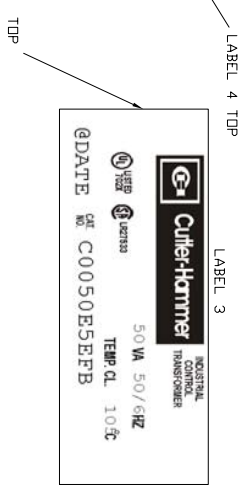

UNLESS OTHERWISE SPECIFIED		S. CASTRO		DATE	
ONE PLACE DEC	40.1	APPD	06/30/09	DATE	06/30/09
TWO PLACE DEC	10.02	CHKD	06/30/09	DATE	06/30/09
THIRD PLACE DEC	1.002	ENG	06/30/09	DATE	06/30/09
ANGLES 24x45 DEG	40.9	APPD	06/30/09	DATE	06/30/09
ANGLE 15x15	40.9	APPD	06/30/09	DATE	06/30/09
VOLTAJE	43%	APPD	06/30/09	DATE	06/30/09
VOLTAJE	43%	APPD	06/30/09	DATE	06/30/09
AMPERAGE	43%	APPD	06/30/09	DATE	06/30/09
AMPERAGE	43%	APPD	06/30/09	DATE	06/30/09
FORCE/TORQUE/SPEED	41.0%	APPD	06/30/09	DATE	06/30/09
FORCE/TORQUE/SPEED	41.0%	APPD	06/30/09	DATE	06/30/09
TEMPERATURE	41.0/41.0	APPD	06/30/09	DATE	06/30/09
TEMPERATURE	41.0/41.0	APPD	06/30/09	DATE	06/30/09
DIMENSIONS TO BE INTERPRETED IN ACCORDANCE WITH	ASME Y14.5M-1994	APPD	06/30/09	DATE	06/30/09
DIMENSIONS TO BE INTERPRETED IN ACCORDANCE WITH	ASME Y14.5M-1994	APPD	06/30/09	DATE	06/30/09
THIRD ANGLE DIMENSION	ASME Y14.5M-1994	APPD	06/30/09	DATE	06/30/09
THIRD ANGLE DIMENSION	ASME Y14.5M-1994	APPD	06/30/09	DATE	06/30/09

Eaton Corporation - Confidential and Proprietary	
NOTE: TO ASSURE ACCURACY OF THE DRAWING AND/OR TECHNICAL INFORMATION, THIS DOCUMENT, INCLUDING THE DRAWING AND INFORMATION CONTAINED THEREON, IS CONFIDENTIAL AND IS THE EXCLUSIVE PROPERTY OF EATON CORPORATION. BY ACCEPTING THIS DOCUMENT, THE USER AGREES TO HOLD EATON CORPORATION HARMLESS FROM AND AGAINST ALL CLAIMS, DAMAGES, LOSSES AND EXPENSES, INCLUDING REASONABLE ATTORNEY'S FEES, THAT MAY BE ASSERTED AGAINST EATON CORPORATION BY ANY PARTY AS A RESULT OF THE USER'S USE OF THIS DOCUMENT. CONTRACTUAL PROVISIONS, THIS NOTICE SHALL GOVERN THE STATUS OF THIS DOCUMENT.	
TITLE	INDUSTRIAL CONTROL TRANSFORMER
SIZE	B
SCALE	C0050E5E5FB.DWG
PARTS LIST	C0050E5E5FB
PRODUCT CODE	C0050E5E5FB
SHEET NO	1 OF 1