


Stand-Off Isolator

- Use to electrically isolate copper ground bus.
- UL recognized material.
- UL 94 V0 Flame Resistance.
- Material: Polyester fiberglass with steel threaded inserts
- Finish Color: Red
- Tensile Pull-Out Strength: 2300 Lbs. (10.23kN)
- Cantilever Strength: 2800 in./lbs. (316Nm)
- Dielectric Strength: 19000 - 21000 volt S.T.




Part Number	Thread Size	'L'		Weight	
		In.	(mm)	Lbs.	(kg)
SB1155	3/8"-16	2 1/2"	(63)	0.30	(0.13)
SB1156	1/2"-13	2 1/2"	(63)	0.31	(0.14)
SB1157	5/8"-11	2 5/8"	(66)	0.39	(0.17)

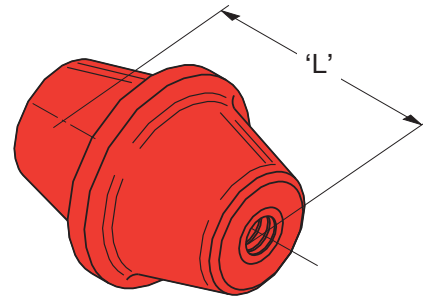

Popular Bee List item

1" (25mm) Stand-Off Isolator

- Use to secure and electrically isolate copper ground bus to equipment frame.
- Includes: (1) Isolator, (2 each) hex head cap screws and lock washers.
- UL recognized material.
- UL 94 V0 Flame Resistance.
- Material: Polyester fiberglass with steel threaded inserts
- Finish Color: Red
- Tensile Pull-Out Strength: 900 Lbs. (4.00kN)
- Cantilever Strength: 350 in./lbs. (39.5Nm)
- Dielectric Strength: 10000 volt S.T. minimum

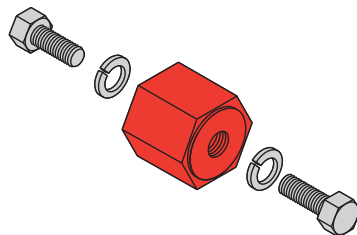

Part Number	Thread Size	Weight	
		Lbs.	(kg)
SB1154	1/4"-20	0.09	(0.04)
SB1153	#12-24	0.09	(0.04)

