M-7241 2

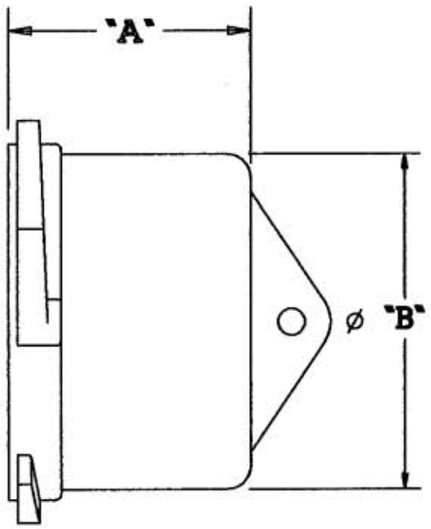


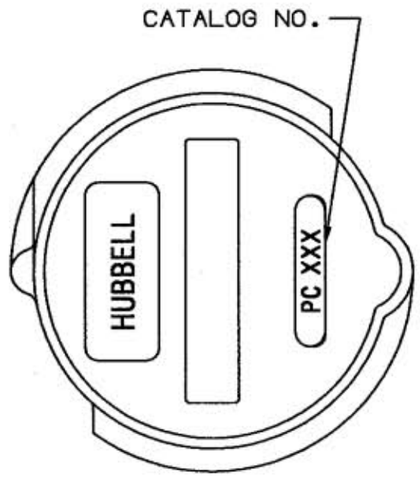


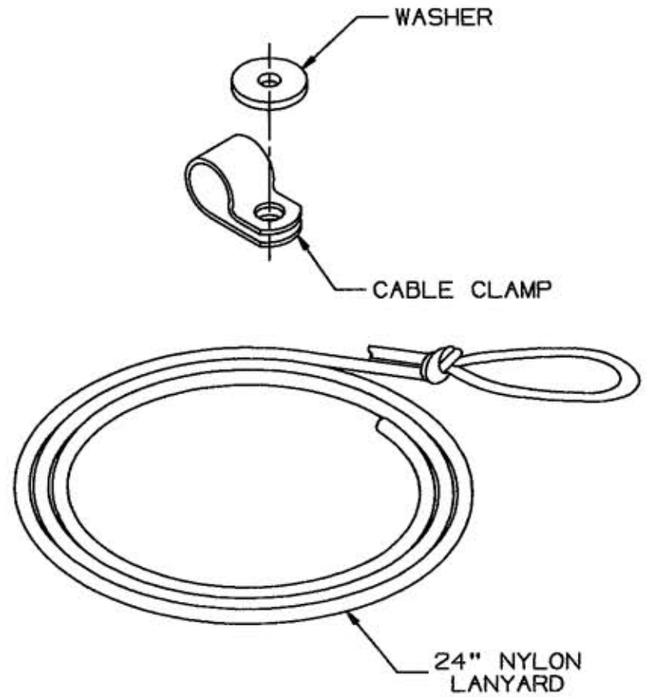


| CAT. NO. | *FITS PLUGS & INLETS | DIM. "A" | ø "B" |
|---|---|---|---|
| PC320 | ALL 16 & 20A 3 WIRE | 1.62 | 2.09 |
| PC420 | ALL 16 & 20A 4 WIRE | 1.62 | 2.37 |
| PC520 | ALL 16 & 20A 5 WIRE | 1.62 | 2.68 |
| PC3430 | ALL 30 & 32A 3 & 4 WIRE | 2.01 | 2.85 |
| PC530 | ALL 30 & 32A 5 WIRE | 2.01 | 3.12 |
| PC60 | ALL 60 & 63A | 2.84 | 3.33 |
| PC100 | ALL 100 & 125A | 3.12 | 3.86 |

* MARKED ON INSIDE OF CUP.

CATALOG NO. INCLUDES THE FOLLOWING:

- -CLOSURE CAP
- -LANYARD ASSEMBLY (UNATTACHED; PACKED IN ENVELOPE) CONSISTS OF:
  - -24" NYLON LANYARD WITH LOOP AT ONE END.
  - -CABLE CLAMP
  - -WASHER
- -INSTRUCTION SHEET

LIST OF PARTS

| DESCRIPTION | MATERIAL | FINISH |
|---|---|---|
| CLOSURE CAP | PBTB/PC BLEND | GRAY |
| WASHER | NYLON | NATURAL |
| CABLE CLAMP | NYLON | BLACK |
| LANYARD | NYLON | WHITE |

| SYM | REVISIONS | APP | DATE |
|---|---|---|---|
| 2 | NYLON LANYARD, KNOT WAS CRIMP SLEEVE. "LIST OF PARTS" TABLE REMOVED CHRIMP SLEEVE. PER DCN 11709 SPN | JPP | 5/19/04 |
| 1 | "X" REMOVED LAST X-REVISION WAS X-0 PER DCN #2565. JMN | ZIMM | 2/15/94 |

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
CLOSURE CAP ASSEMBLY, PIN & SLEEVE

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY JMN | APP. BY
TR. BY | SCALE NONE
CHK'D BY | DATE 2/15/94

DIMENSION SHEET FOR CAT. NO.
REPAIRABLE ☐
NON-REPAIRABLE ☐
B
M-7241 2

CODE 74545