

Twist-Lock® Devices  
15A, 125V, 2 Pole, 3 Wire Grounding  
Insulgrip® Connector

# HUBBELL

## Features

- Individually molded face for each blade configuration
- Roomy wiring chamber provides ample space for wiring
- Ribbed nylon housing provides a secure grip that's impact and chemical resistant

## Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Insulgrip, corrosion resistant, yellow and white nylon.	.230"- .720" (5.8-18.3)	783585160702	HBL47CM29C

## Listings

Listed to UL 498  
Fed.Spec. W-C-596  
Certified to CSA C22.2 No.42

## Specifications


Housing / Cord Clamp	Nylon
Terminal Retainer	Clear polycarbonate
Contacts	Nickel Plated Brass
Terminal Screws	#10-32 Brass (Phillips / Slotted / Robertson)
Terminal Clamp	Cold rolled steel – nickel plated
Assembly Screws	Stainless Steel

## Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum

Mechanical	
Terminal Accommodation	#16 AWG - #8 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498

Environmental	
Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C; Minimum -40°C (w/o impact)

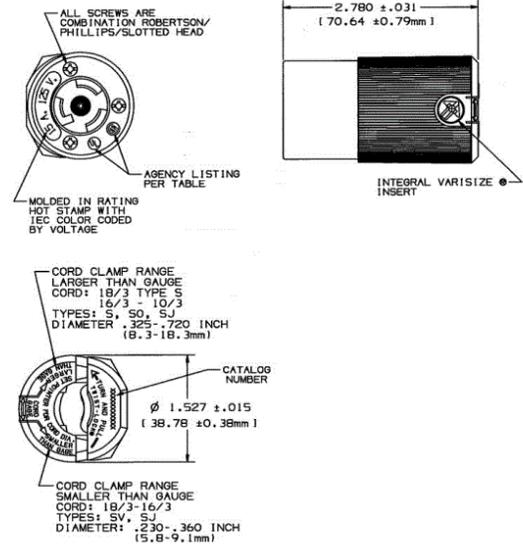

## Accessories

Plug	HBL47CM20C
Weatherproof Boot	HBL60CM24
Flanged Inlet	HBL4716C

## Resources

Customer Use Drawing  
eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

