

Compression Splice Kits


Dissipate heat and make perfect watertight seals.

Aluminum Flood-Seal® Compression Splice Kits

- Radiating Rib design dissipates heat, centers the watertight insulating cover and seals perfectly every time
- Rubber Flood-Seal® insulating cover fits snugly for maximum heat dissipation, no tape required
- Compact size allows you to install connectors on up to 4/0 cable in only 10" of space using UT 3 M or UT 3 tools
- Prefilled with oxide inhibitor to prevent oxidation and keep out moisture
- Exceeds ANSI C119.4 requirements and is RUS Accepted



RRK 500

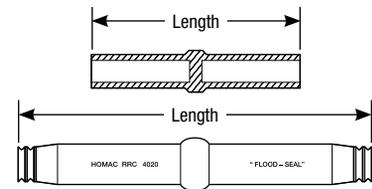

CAT. NO.	COLOR CODE	WIRE SIZE		CONNECTOR LENGTH	INSULATOR LENGTH	INSTALLING DIES	STRIP
		FROM	TO				
RRK 4	Orange	#4	#4	2	5½	½ (3)	1
RRK 2	Red	#2	#2	3	5½	¾ (5)	1½
RRK 24	Red/Orange	#2	#4				
RRK 1	Red	#1	#1				
RRK 10	Yellow	1/0	1/0				
RRK 102	Yellow/Red	1/0	#2				
RRK 20	Gray	2/0	2/0				
RRK 201	Gray/Red	2/0	#1				
RRK 202	Gray/Red	2/0	#2				
RRK 2010	Gray/Yellow	2/0	1/0				
RRK 30	Black	3/0	3/0			4¼	
RRK 3010	Black/Yellow	3/0	1/0				
RRK 3020	Black/Gray	3/0	2/0				
RRK 40	Pink	4/0	4/0				
RRK 4010	Pink/Yellow	4/0	1/0				
RRK 4020	Pink/Gray	4/0	2/0				
RRK 4030	Pink/Black	4/0	3/0	4½	7½	¾ (7)	2¼
RRK 40-840	Pink	4/0	4/0				
RRK 250	None	250	250				
RRK 300	None	300	300				
RRK 350	None	350	350				
RRK 350300	None	350	300				
RRK 35040	None	350	4/0				
RRK 500	None	500	500				
				6¾	10¾	472, 655, 13A, 96, 1½-2	2¼

Note: For copper splice kits, add "CU" suffix to the catalog number.

Compression Splice Kits

Heat-shrink tubing creates sealed, watertight splices.

Aluminum Heat-Shrink Compression Splice Kits

- Radiating Rib design dissipates heat, centers the watertight insulating cover and seals perfectly every time
- Heavy-wall heat-shrink tubing enables you to crimp the two pieces of wire together, then heat the splice with a hot-air gun to get a fully sealed, watertight repair splice
- Prefilled with oxide inhibitor to prevent oxidation and keep out moisture
- Exceeds ANSI C119.4 requirements and is RUS Accepted



RRK 40 HS

CAT. NO.	COLOR CODE	WIRE SIZE		CONNECTOR LENGTH	INSULATOR LENGTH	INSTALLING DIES	STRIP
		FROM	TO				
RRK 4 HS	Orange	#4	#4	2	5½	½ (3)	1
RRK 2 HS	Red	#2	#2	3	5½	⅝ (5)	1½
RRK 24 HS	Red/Orange	#2	#4			⅝ (5)	
RRK 1 HS	Red	#1	#1			⅝ (5)	
RRK 10 HS	Yellow	1/0	1/0			⅝ (5)	
RRK 102 HS	Yellow/Red	1/0	#2	4¼	7¼	⅝ (5)	2¼
RRK 20 HS	Gray	2/0	2/0			⅝ (5)	
RRK 201 HS	Gray/Red	2/0	#1			⅝ (5)	
RRK 202 HS	Gray/Red	2/0	#2			⅝ (5)	
RRK 2010 HS	Gray/Yellow	2/0	1/0	4¼	7¼	⅝ (5)	2¼
RRK 30 HS	Black	3/0	3/0			⅝ (7)	
RRK 3010 HS	Black/Yellow	3/0	1/0			⅝ (5)	
RRK 3020 HS	Black/Gray	3/0	2/0			⅝ (7)	
RRK 40 HS	Pink	4/0	4/0	4¼	7¼	⅝ (7)	2¼
RRK 4010 HS	Pink/Yellow	4/0	1/0			⅝ (7)	
RRK 4020 HS	Pink/Gray	4/0	2/0			⅝ (7)	
RRK 4030 HS	Pink/Black	4/0	3/0			⅝ (7)	
RRK 40-840 HS	Pink	4/0	4/0	4¼	7¼	840, 249, 11A	2¼
RRK 250 HS	None	250	250			840, 249, 11A	
RRK 300 HS	None	300	300			840, TX, 76, 249, 11A	
RRK 350 HS	None	350	350			840, TX, 76, 249, 11A	
RRK 350300 HS	None	350	300	6¾	10¾	840, TX, 76, 249, 11A	2¼
RRK 35040 HS	None	350	4/0			840, TX, 76, 249, 11A	
RRK 500 HS	None	500	500	6¾	10¾	472, 655, 13A, 96, 1½-2	2¼

Note: Use the Homac UT 3 or UT 3 M tool for wire sizes up to 4/0.

Compression Splice Kits

Dissipate heat and make perfect watertight connections.

Copper Flood-Seal® Compression Splice Kits

Homac® Copper Flood-Seal® Compression Splice Kits enable you to quickly make watertight copper-to-copper splice connections or repair copper service cables damaged by dig-ins or failures and restore their watertight integrity.

The unique design of the splice/cover combination makes this the fastest and easiest watertight splicing solution available. The pre-greased insulating cover slides effortlessly onto the cable. After you've prepared the cable and crimped the splice, simply slide the cover back over the splice until it is positively centered and mates with the connector rib. That's it — no cutting, taping, heat guns or pull cords!

- Radiating Rib dissipates heat, centers the watertight insulating cover and seals perfectly every time
- Single-piece Flood-Seal® insulating covers are pre-lubricated and sized for the connection
- Easy installation saves you time and money
- Exceeds ANSI C119.1 requirements



RRK 2 CU




RRK 20 CU



RRK 250 CU



RRK 500 CU

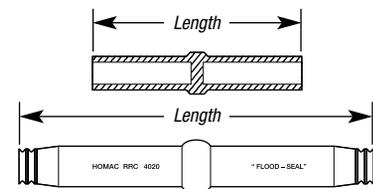

CAT. NO.	WIRE SIZE	CONNECTOR LENGTH	INSULATOR LENGTH	INSTALLING DIES	STRIP LENGTH
RRK 2 CU	#2	2	4½	TQ, 42, 163, ½	1
RRK 10 CU	1/0	2½	5½	TU, 52, BG, 243, ⅝	1½
RRK 20 CU	2/0	2½	5½	TU, 52, BG, 243, ⅝	1½
RRK 30 CU	3/0	2½	5½	TU, 52, BG, 243, ⅝	1½
RRK 40 CU	4/0	2¾	7¼	TW-TY, 54, 243	1¾
RRK 250 CU	250	2¾	7½	840, 76, 249	1¾
RRK 350 CU	350	2¾	7½	840, 76, 249	1¾
RRK 500 CU	500	3¾	9½	96, 472, 655, 1⅞-2	1¾