


Clamp Connectors

Connectors for a variety of applications.

XT™ Clamp for Tee Tap, Cross, Parallel and End-to-End Connectors

- Copper alloy castings provide high strength for heavy-duty applications
- Silicon-bronze bolts built to handle frequent moves, adds and changes

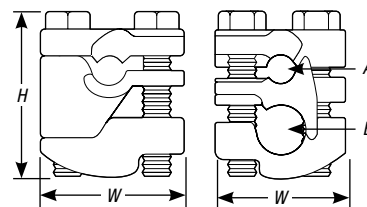

CAT. NO.	CONDUCTOR RANGE (AWG OR KCMIL)				CONDUCTOR DIAMETER				DIMENSIONS (IN.)			BOLT SIZE (IN.)
	MAIN		TAP		A		B					
	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	L	H	W	
XT12	4/0 str.	#1 str.	#2 str.	#6 sol.	.528	.328	.292	.162	1½	1⅞ ₁₆	1½	⅝ ₁₆
XT13			4/0 str.	#1 str.	.528	.328	.528	.328	1⅞	2	1⅞	¾
XT21	500	250	#2 str.	#6 sol.	.813	.574	.292	.162	2⅞ ₁₆	2⅜ ₁₆	1⅞	¾
XT22			4/0 str.	#1 str.	.813	.574	.528	.328	2⅞	2⅜ ₁₆	2⅞	¾
XT23*	1000	500	500	250	.813	.574	.813	.574	2⅞	2⅜ ₁₆	2⅞ ₁₆	¾
XT33*			500	250	1.152	.811	.813	.574	2⅞	3	2⅞ ₁₆	¾
XT34*			1000	500	1.152	.811	1.152	.811	2⅞ ₁₆	3⅞	2⅞ ₁₆	⅞ ₁₆

* 4-bolt clamps

Note: For tin-plating option, add "-P" suffix to the catalog number.


Deadend loop connections.

DLC™ Single U-Bolt Aluminum Fittings

- Top and bottom pressure pads cast of high-strength, heat-treated, aluminum-silicon alloy
- Hardware made of galvanized steel provides added strength and durability



DLC2106

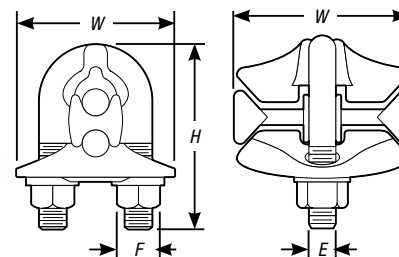

CAT. NO.	CONDUCTOR RANGE (AWG OR KCMIL)				CONDUCTOR DIAMETER				DIMENSIONS (IN.)				
	ACSR		AWG OR KCMIL		A		B		W	L	H	F	E
	MAIN	TAP	MAIN	TAP	MAX.	MIN.	MAX.	MIN.					
DLC2106*	2/0-#6	2/0-#6	2/0 str.-#6 sol.	2/0 str.-#6 sol.	.447	.162	.447	.162	1⅞	1½	3¼	⅞	¾
DLC23*	4/0-#1, #2-#6 AR	4/0-1/0	266.8-1/0 str.	266.8-1/0 str.	.563	.368	.609	.368	2⅞	2⅞	4	¾	½
DLC25	336.4-1/0, 1/0-#6 AR	336.4-1/0, 1/0-#6 AR	397.5-1/0 str.	397.5-1/0 str.	.684	.368	.743	.368	2⅞	3⅞	4	¾	½

* RUS Accepted.

AR — with Armor Rod.

Note: For oxide-inhibitor option with aluminum-to-copper applications, add "-9" suffix to the catalog number.