




4 3 2 1

Transformer Specifications	
PRIMARY VOLTAGE(S)	230x460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	115
RATED V/A	50
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	2.7 LBS

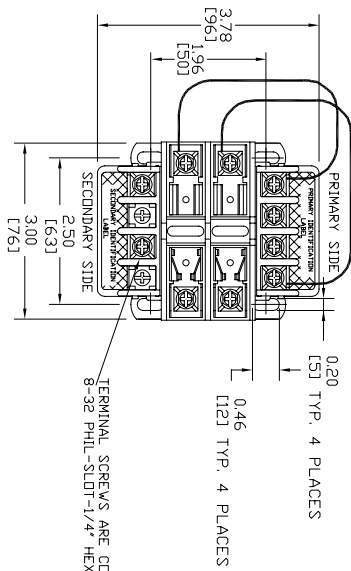


TERMINAL SCREWS ARE COMBINATION 8-32 PHIL.-SLD-T-1/4" HEX WITH SENS WASHER

TEST REQUIREMENTS			
WINDING	H4-H3	H2-H1	X2-X1
DC VOLTS	240	240	135.7
LOAD VOLTS	240	240	120
F.L. AMPS	0.152	0.152	0.417
HI-POINT	3000V		1800V
EXCITING AMPS	0.29AMPS @ 240 VOLTS, 50HZ		
EXCITING WATTS	6.3 MAX		

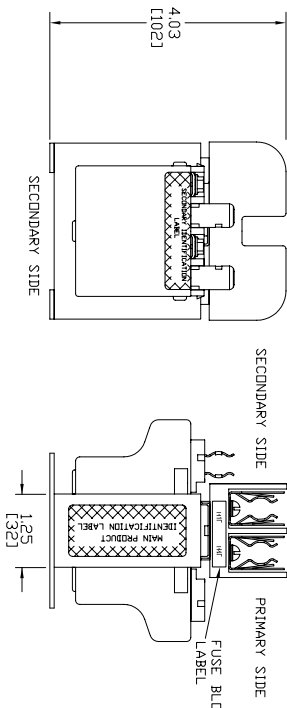

NOTE:
1. ALL MEASUREMENTS IN INCHES(MM).

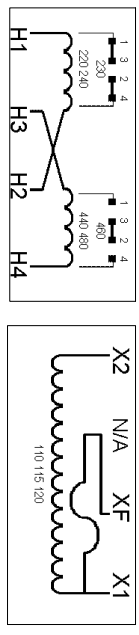

Chiller-Hammer INDUSTRIAL CONTROL TRANSFORMER
 50VA 50/60HZ
 TEMP CL. 105°C
 CAT. C0050E2AFB
 SERIES 2
 341083
 B050-2160-8

1	REVISION DT1109		
UNLESS OTHERWISE SPECIFIED		EATON CORPORATION - CONFIDENTIAL AND PROPRIETARY	
DIMENSIONS IN INCHES		DATE	11/06/08
ONE PLACE DEC		APP'D	S.CASTRO
TWO PLACE DEC		DATE	11/06/08
THREE PLACE DEC		APP'D	E.ROBLES
ANGLES		DATE	11/06/08
TOLERANCES		APP'D	C.CASTORENA
FRACTIONS		ENGR REF	
DECIMALS		ENGR REF	
DIMENSIONS TO BE INTERPRETED IN ACCORDANCE WITH ASME Y14.5M-1994		NEXT ASSY	
THIRD ANGLE PROJECTION		TOOL REF	
OSPEC		SCALE	B
		DWG NO	C0050E2AFB
		PRODUCT CODE	C0050E2AFB
		SHEET NO	1 OF 1