

# Rittal – The System.

Faster – better – everywhere.

## Ground rail, vertical for TS – DK 7547.000

Date : May 24, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# Ground rail, vertical for TS – DK 7547.000

created: 24.05.2018 build on [www.rittal.com/us-en](http://www.rittal.com/us-en)

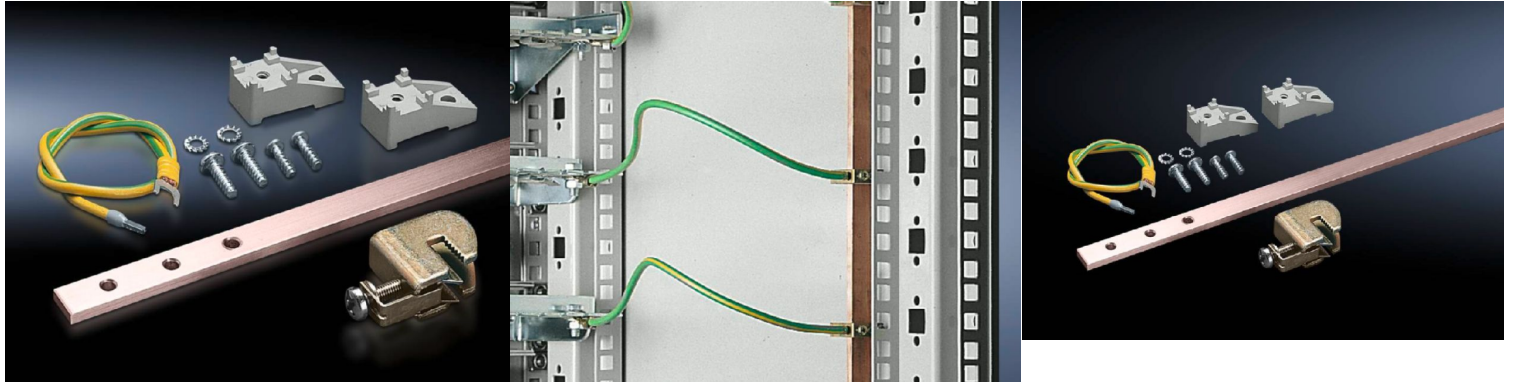

## Product description

**Description:** Easy to mount on 25 mm DIN hole pattern on distributor or on 482.6 mm (19") punched rails. The supplied ground conductors facilitate star grounding of cable clamp straps on patch panels. The ground terminals are fully adjustable. Rail current carrying capacity approx. 200 A.

**Supply includes:** Ground rail made from E-Cu 57 to DIN EN 12 163, DIN EN 13 601, 15 x 5 mm  
16 conductor connection clamps 2.5 – 16 mm<sup>2</sup>  
15 grounding leads 6 mm<sup>2</sup>, L = 500 mm  
Fasteners

## Product features

**Suitable for:** Enclosure type: TS  
Height: 2000 mm (79 ")

**Dimensions:** Length: 1745 mm (69 ")

**Packaging unit:** 1 pc(s).

**Weight/packaging unit:** 2.81 kg (6.2 lb.)

**EAN:** 4028177131910

**Customs tariff number:** 74199990

**ETIM 6.0:** EC000329

**ETIM 5.0:** EC000329

<b>eCl@ss 8.0/8.1:</b>	27400605
<b>eCl@ss 7.0/7.1:</b>	27149205
<b>eCl@ss 6.0/6.1:</b>	27149205
<b>eCl@ss 5.1/5.1.4:</b>	27189215
<b>Product description (long):</b>	DK Earth rail, vertical, L: 1745 mm, For H: 2000 mm, For TS
<b>Approvals</b>	
<b>Certificates:</b>	EAC