

McGILL® Momentary Contact Pushbutton Switches

Applications

- Single pole, high amperage – suitable for back panel applications.



Features

- Rugged switch mechanism ensures long life.
- Screw terminal.
- Mounting hardware consists of nickel plated hex nut and knurled nut.

Standard Materials

- Base: phenolic 302 °F/150 °C
- Bushing: nickel plated brass
- Push button: black plastic cap


Certifications and Compliances

-  UL Recognized Component
- UL File Number: E335442
- UL Standard: 1054, Guide WORY2
- CSA File Number: 249055
- CSA Standard: C22.2 No. 55
-  RoHS Compliant



Circuitry			Poles	Ratings	Terminal Type	Catalog Number
A	B	C				
OFF	—	(ON)	SPST	15 Amp, 125 Vac 10 Amp, 250 Vac	Screw	100N

Dimensions in Inches/Millimeters

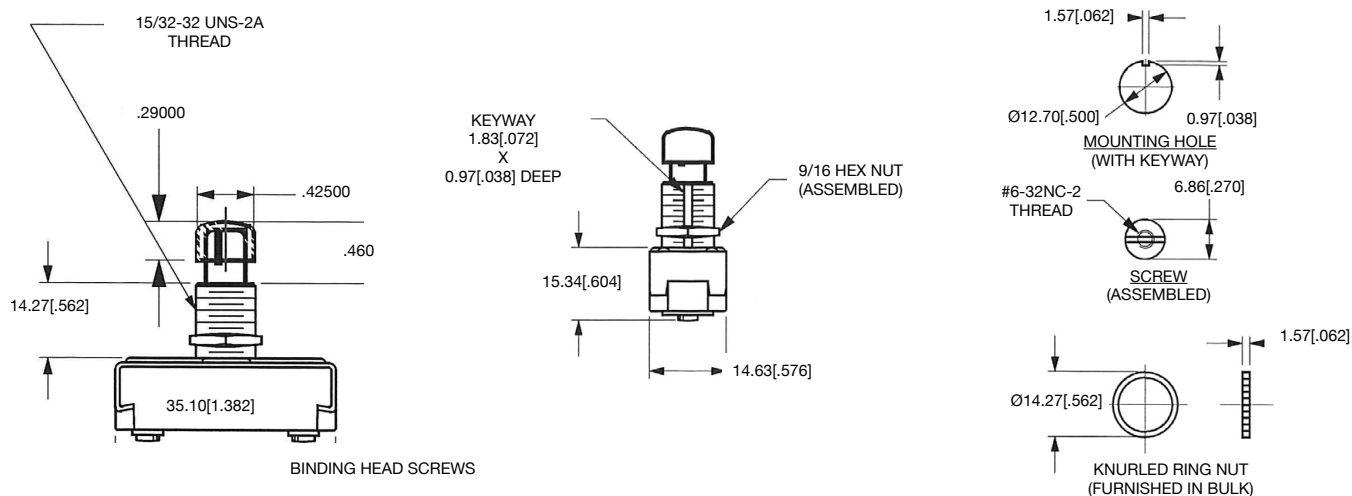

() Momentary.

2374

 **Appleton®**

Visit our website at www.appletonelec.com or contact us at (800) 621-1506.

© April 2015