




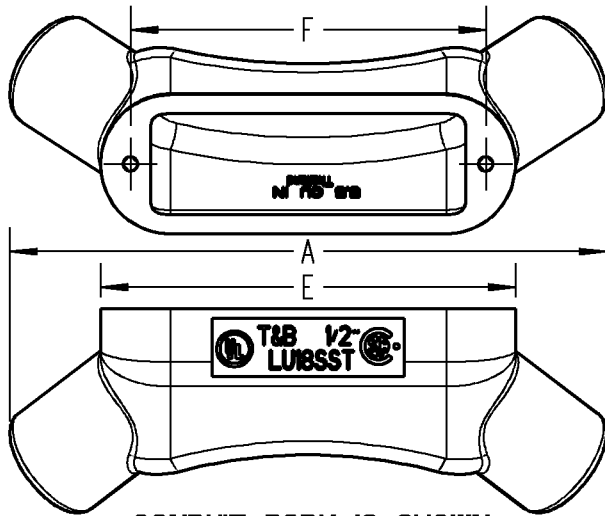


T&B Rigid Fittings

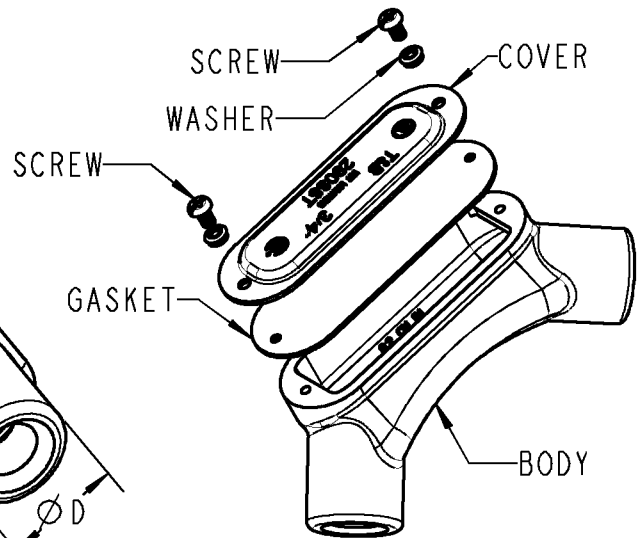

CONDUIT BODY IS SHOWN



ASSEMBLED CONDUIT BODY IS SHOWN

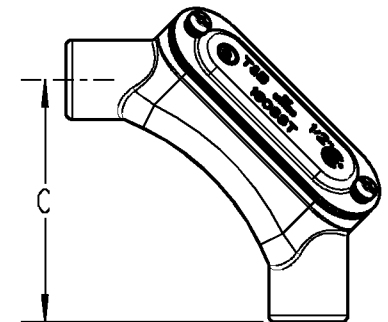

NOTES:

- MATERIAL:**
BODY AND COVER: 316 STAINLESS STEEL
SCREWS AND WASHER RETAINERS: 18-8 STAINLESS STEEL
GASKET AND WASHER SEALS: SOLID NEOPRENE (-20°F TO 170°F)
- FINISH:**
COVER: MIRROR POLISHED
BODY: POLISHED
GASKET AND WASHER SEALS: BLACK IN COLOR
- ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- ALL HUBS: NPT THREADS
- SS CONDUIT BODIES AND COVERS ARE ASSEMBLED.
- TWO SCREW COVER STYLE SHOWN. TRADE SIZES 1-1/2" & 2" SHALL HAVE (4) SCREW STYLE.
- UL LISTED AND CSA CERTIFIED.

LU68SST	2" LU STYLE CONDUIT BODY 116.5 CU IN; MAX. 3 WIRE 250 MCM	13.989"	3.820"	8.500"	2.900"	9.797"	9.125"
LU58SST	1-1/2" LU STYLE CONDUIT BODY 45.0 CU IN; MAX. 3 WIRE #2/0	11.549"	2.813"	7.000"	2.450"	7.938"	7.125"
LU48SST	1-1/4" LU STYLE CONDUIT BODY 26.5 CU IN; MAX. 3 WIRE 1/0	9.923"	2.200"	5.975"	2.200"	6.730"	5.810"
LU38SST	1" LU STYLE CONDUIT BODY 14.5 CU IN; MAX. 3 WIRE #3	8.261"	1.850"	5.050"	1.700"	5.625"	5.000"
LU28SST	3/4" LU STYLE CONDUIT BODY 8.5 CU IN; MAX. 3 WIRE #6	6.981"	1.645"	4.245"	1.500"	4.921"	4.300"
LU18SST	1/2" LU STYLE CONDUIT BODY 5.5 CU IN	6.210"	1.450"	3.825"	1.125"	4.320"	3.700"
CAT.NO.	TRADE SIZE ; VOLUME CONTENT; MAX. NUMBER & SIZE OF WIRES	DIM."A"	DIM."B"	DIM."C"	DIM."D"	DIM."E"	DIM."F"

GENERAL NOTES

- ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.

REVISIONS

** SEE ERN (****)
FOR APPROVAL SIGNATURES
& RELEASE DATE.
PROJECT NO: ****

DESCRIPTION:

LU® STYLE ASSEMBLED SS CONDUIT BODIES

ORIGINAL PROJECT NO / (ERN NO)

RD55769 / (2012664)

SHEET NO:

1 OF 1

REV. NO:

1

DRAWING NO:

WSD-000532

Thomas & Betts
www.tnb.com

THIS DRAWING IS INTENDED FOR DESCRIPTIVE PURPOSES ONLY. AND THE RIGHT IS RESERVED TO DEViate FROM ANY OF THE DETAILS SHOWN HEREON.

© Thomas & Betts - Proprietary. All Rights Reserved