


JOB NAME _____


TYPE _____

MOUNTING ACCESSORIES IA-18030


ORDERING MATRIX




DIMENSIONS

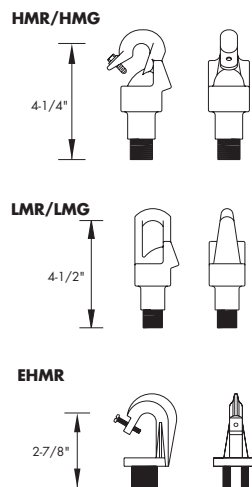

ORDERING MATRIX




PRODUCT FEATURES




- #2/0 Bulldog chain
- Design working load - 255 lbs. max.
- Pull out test - 1000 lbs. min.

ORDERING MATRIX




PRODUCT FEATURES

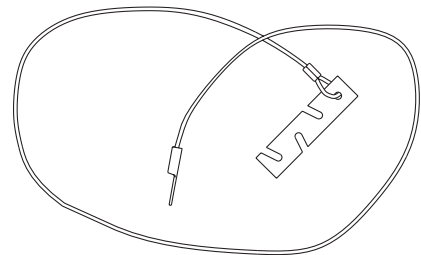


- 3/32 galvanized steel cable 7X7 stranded
- Minimum break strength - 920 lbs.
- Pull out test - 600 lbs. min.

ORDERING MATRIX




PRODUCT FEATURES



- #4 double loop zinc plated steel chain
- Design working load - 70 lbs. max.
- Pull out test - 280 lbs. min.

RSC

FAMILY

RSC- Reflector
Safety Cable

- Stainless steel cable 7X7 stranded
- Minimum working load - 150 lbs.
- Minimum break strength - 480 lbs.



© 2013 Koninklijke Philips Electronics N.V. All rights reserved.
Specifications are subject to change without notice.
www.philips.com/luminaires

IA-18030 03/13

Philips Lighting Company
200 Franklin Square Drive
Somerset, NJ 08873
Phone: 855-486-2216

Philips Lighting Company
281 Hillmount Road
Markham ON, Canada L6C 2S3
Phone: 800-668-9008