M-13462 | 4




| CAT NO. BLACK | CAT NO. GRAY | NPT THREAD SIZE (METRIC DESIGNA-TOR) | CONDUIT TRADE SIZE (METRIC DESIGNA-TOR) | - A - INCH (mm) | - B - INCH (mm) | - C - INCH (mm) | - D - INCH (mm) | - E - INCH (mm) | - F - INCH (mm) | - G - INCH (mm) A/C* | - H - INCH (mm) A/F* | - I - INCH (mm) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| PS0389NBK | PS0389NGY | 1/2 (16) | 3/8 (12) | 1.30 (33.0) | 3.27 (83.1) | 0.57 (14.5) | 0.55 (14.0) | 1.43 (36.3) | 2.00 (50.8) | 1.41 (35.8) | 1.30 (33.0) | 0.875 (22.2) |
| PS0509NBK | PS0509NGY | 1/2 (16) | 1/2 (16) | 1.30 (33.0) | 3.27 (83.1) | 0.57 (14.5) | 0.55 (14.0) | 1.43 (36.3) | 2.00 (50.8) | 1.41 (35.8) | 1.30 (33.0) | 0.875 (22.2) |
| PS0759NBK | PS0759NGY | 3/4 (21) | 3/4 (21) | 1.53 (38.9) | 3.66 (93.0) | 0.58 (14.7) | 0.74 (18.8) | 1.59 (40.4) | 2.23 (56.6) | 1.65 (41.9) | 1.53 (38.9) | 1.109 (28.2) |
| PS1009NBK | PS1009NGY | 1 (27) | 1 (27) | 1.80 (45.7) | 4.00 (101.6) | 0.72 (18.3) | 0.96 (24.4) | 1.84 (46.7) | 2.30 (58.4) | 1.94 (49.3) | 1.80 (45.7) | 1.375 (34.9) |

*A/C = ACROSS CORNERS, A/F = ACROSS FLATS

NOTES:
1. MATERIAL: 6/6 NYLON
2. TEMPERATURE RANGE: -30°F (-34°C) TO 225°F (107°C).
3. COLORS: SEE TABLE
4. RoHS COMPLIANCE: CONNECTORS MEET EU DIRECTIVE, RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCE IN ELECTRICAL OR ELECTRONIC EQUIPMENT.
5. AGENCY APPROVALS - UL LISTED AND CSA CERTIFIED.
6. PRIMARY DIMENSIONS ARE INCHES. UNITS IN SI ARE PROVIDED AS REFERENCE ONLY.
7. TOLERANCES: XX±.02, XXX±.005, ANGLES ±1°. GENERAL TOLERANCES DO NOT APPLY.

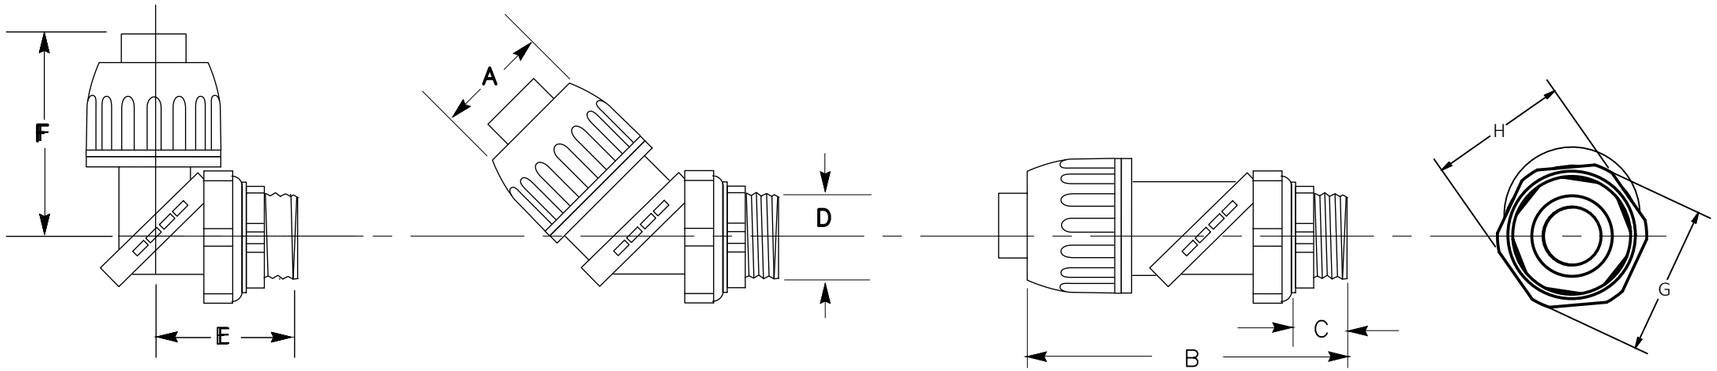


SUGGESTED CLEARANCE HOLE FOR NON THREADED MOUNTING

CAGE CODE 74545

LIST OF PARTS

| DESCRIPTION | MATERIAL | FINISH |
|---|---|---|
| CONNECTOR | NYLON | BLACK/GRAY |
| O-RING | ELASTOMER | BLACK |
| LOCK NUT | NYLON | NATURAL/BLACK |
| FERRULE | NYLON | BLACK |
| COMPRESSION NUT | NYLON | BLACK/GRAY |
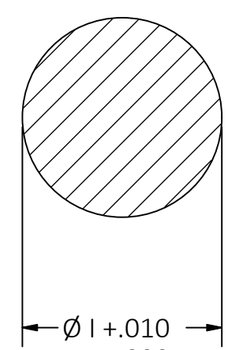
| REV | DESCRIPTION | APP | DATE |
|---|---|---|---|
| 4 | LIST OF PARTS- LOCKNUT NYLON, NATURAL/BLACK WAS NATURAL PER DCN 23596. RM | EJM | 2/21/18 |
| 3 | LIST OF PARTS- LOCKNUT NYLON, NATURAL WAS STEEL, ZINC PLATE PER DCN 23274. RM | EJM | 2/1/18 |
| 2 | CAT.NO.S IN TABLE UPDATED TO REFLECT NO. CALLED OUT ON DCN 22362, UPDATED NOTE 4 PER DCN 23274. MYA | DJP | 8/15/17 |
| 1 | NEW RELEASE PER DCN 22362 MYA | FFS | 9/21/16 |

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].

TITLE LIQUID-TIGHT NON- METALLIC SWIVELLOK FITTING

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

TOLERANCES UNLESS OTHERWISE SPECIFIED
.XX = ± .01
.XXX= ± .005
ANGLE TOL. ±2°

| DR. BY | MALLEN | SCALE | NONE |
|---|---|---|---|
| CHK. BY | FFS | DATE | 9/21/16 |

DIMENSION SHEET FOR CAT. NO.

B

M-13462

4