

## SPECIFICATION SHEET

### EPC SERIES LOW VOLTAGE PHOTOSENSORS

#### APPLICATIONS

- Parking lots.
- Walkways.
- Building exteriors.
- Floodlighting.

#### FEATURES

All Lexan® enclosure for impact and vandal resistant.  
Mounting for 1/2" conduit with 180° swivel.  
Dome and base ultrasonically welded for maximum strength.

#### SPECIFICATIONS

1-100fc light level adjustment available on time switch  
(ELC series 1 – 250fc).  
Maximum run length of twisted pair wire:  
250 ft with 22AWG and 500 ft with 18AWG.

#### ORDERING INFO


CAT. NO.	UPC CODE	COLOR	TORK TIME SWITCH COMPATIBLE
EPC1	82115	Grey	DGU Series
			DGLC Series
			LC200 Series
EPC2	82120	Grey	DLC 400BP
EPC-A	82112	Grey	DGU-A Series DGLC-A Series
EPC-LC	82233	Grey	ELC Series




EPC1

EPC2  
EPC-A  
EPC-LC

#### WIRING DIAGRAMS

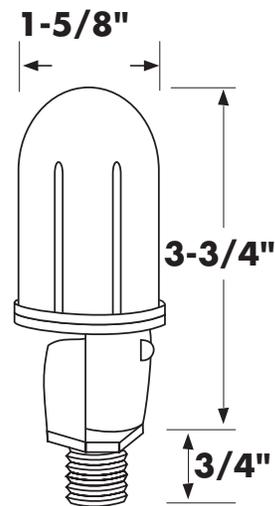

EPC1

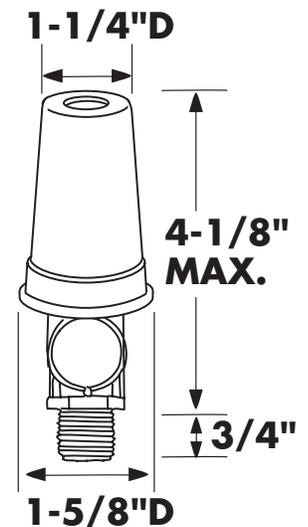

EPC2