

# Rittal – The System.

Faster – better – everywhere.

## Laminated Copper Bars – SV 3571.005

Date : May 24, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# Laminated Copper Bars – SV 3571.005

created: 24.05.2018 build on [www.rittal.com/us-en](http://www.rittal.com/us-en)

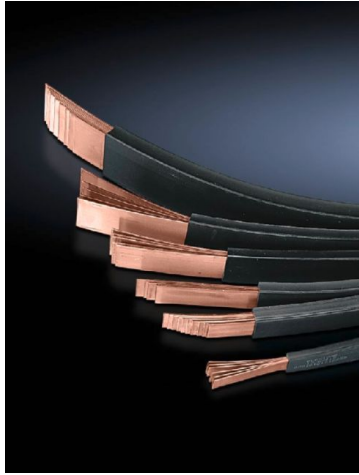

## Product description

<b>Material:</b>	Cu lamina: High-purity electrolyte copper Insulation: High-strength vinyl compound, expansion 370%, dielectric strength: 20 kV/mm Fire protection corresponding to UL 94-V0
------------------	---

<b>Note:</b>	May be cut to length as required
--------------	----------------------------------

## Product features

<b>Dimensions:</b>	Length: 2000 mm
--------------------	-----------------

<b>Laminated flat copper version:</b>	Number of lamina: 5 Lamina thickness: 1 mm (0.04 ") Lamina width: 24 mm (0.94 ")
---------------------------------------	--

<b>Rated current for temperature increase by:</b>	70 K: 605 A 50 K: 510 A 30 K: 385 A
---	---

<b>Packaging unit:</b>	1 pc(s).
------------------------	----------

<b>Weight/packaging unit:</b>	2.65 kg (5.8 lb.)
-------------------------------	-------------------

<b>EAN:</b>	4028177666771
-------------	---------------

<b>Customs tariff number:</b>	74071000
-------------------------------	----------

<b>ETIM 6.0:</b>	EC001522
------------------	----------

<b>ETIM 5.0:</b>	EC001522
<b>eCl@ss 8.0/8.1:</b>	27370303
<b>eCl@ss 7.0/7.1:</b>	27370303
<b>eCl@ss 6.0/6.1:</b>	27370303
<b>eCl@ss 5.1/5.1.4:</b>	27370302
<b>Product description (long):</b>	SV Laminated copper bar, WH: 24x5 mm, L: 2000 mm
<b>Approvals</b>	
<b>Approvals:</b>	C-UR UR UR + C-UR
<b>Certificates:</b>	EAC
<b>Declarations:</b>	Declaration of conformity