


REPAIRABLE ☐ NON-REPAIRABLE ☒

B
M-6541

M-6541

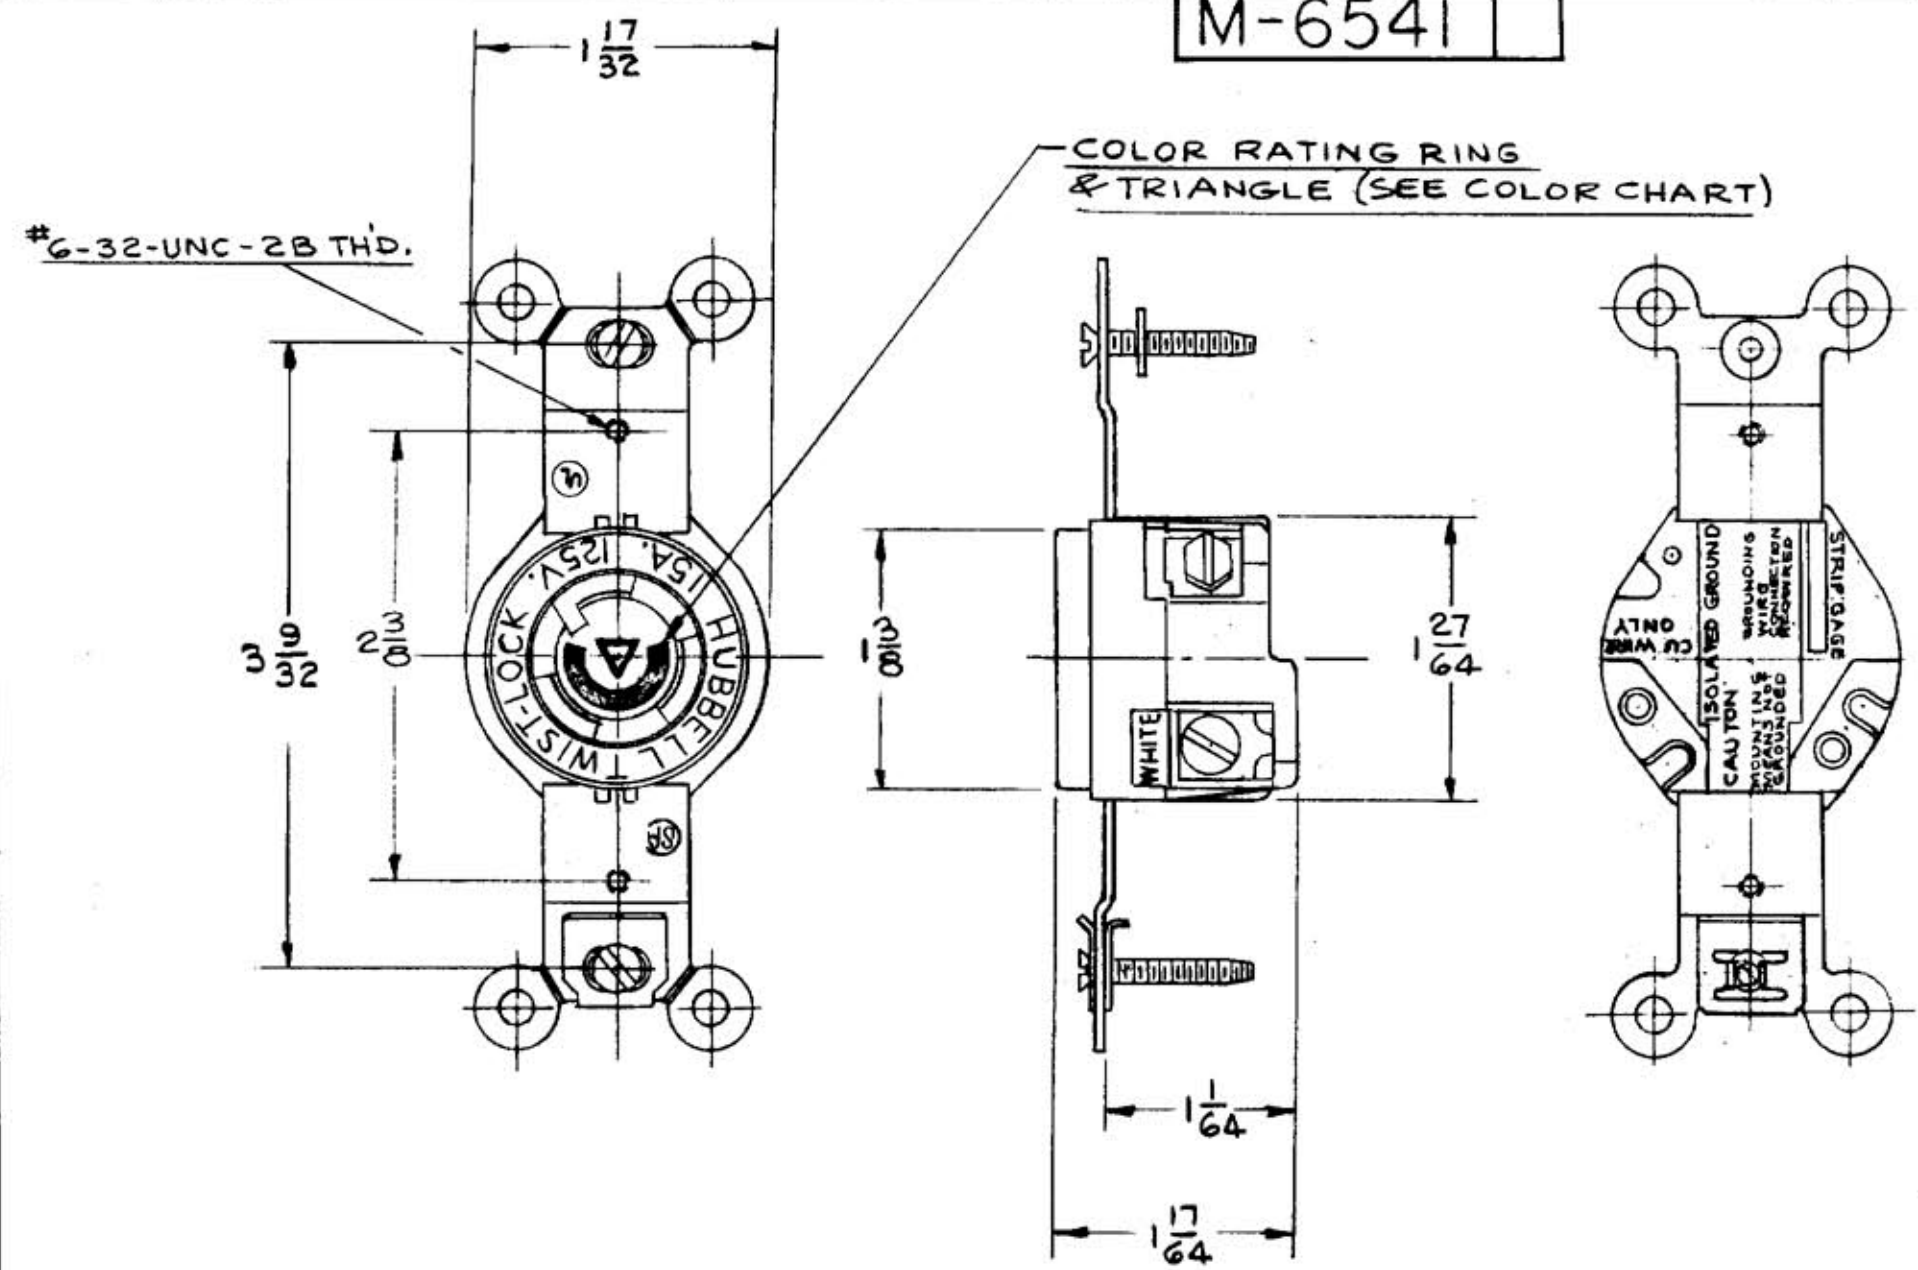

CAT. NO.	CONFIGURATION	RATING	COLOR	
			RATING RING	△
1G-4710	NEMA L5-15R	15A 125V.	YELLOW	YELLOW
1G-4560	NEMA L6-15R	15A 250V.	BLUE	BLUE

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
BASE	POLYESTER	
COVER	NYLON	
CONTACT SPRINGS	.031 BRASS	
CLAMPING PLATE	.031 BRASS	
GROUND CONTACT	.031 BRASS	
BRIDGE	.050 STEEL	ZINC PL.
BINDING SCREWS	BRASS	
HEX. HD. BIND. SCR.	BRASS	GREEN
FLAT HD. MTG. SCREW	STEEL	ZINC PL.
WASHER	.031 FIBER	RED
GROUND SPRING	STAINLESS STEEL	

SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE.

TITLE
15A 2-POLE 3-WIRE GROUNDING
SINGLE TWIST-LOCK RECEPTACLE
WITH ISOLATED GROUND.

TOLERANCES UNLESS OTHERWISE SPECIFIED		WIRING DEVICE DIVISION HARVEY HUBBELL, INC. BRIDGEPORT, CONN.	
FRACTIONS	± 1/64	DR. BY <u>ALL</u>	APP. BY
DECIMALS	± .005	TR. BY	SCALE
ANGLES	± 2°	CHK'D. BY	DATE