



# MasterColor CDM-TC T4

## MasterColor CDM-TC 35W/830 G8.5 T4 CL

MasterColor CDM lamp gives a unique combination of unbeatable light quality and consistent performance over lifetime while keeping running costs low. The Philips MasterColor Tubular Single-Ended T4 lamp is a compact, energy efficient, ceramic metal halide lamp that provides crisp, sparkling light.

### Warnings and Safety

- R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21 CFR 1040.30 Canada: SOR/DORS/80-381)
- Lamp contains mercury. Manage in Accord with Disposal Laws. See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050

### Product data

General Information		Lumen Maintenance 10000 h (Nom)	
Base	G8.5 [ G8.5]	Lumen Maintenance 2000 h (Min)	50 %
Operating Position	Universal [ Universal]	Lumen Maintenance 2000 h (Nom)	70 %
Life to 5% Failures (Nom)	9000 h	Lumen Maintenance 5000 h (Min)	80 %
Life To 10% Failures (Nom)	10000 h	Lumen Maintenance 5000 h (Nom)	50 %
Life to 20% Failures (Nom)	11000 h	Chromaticity Coordinate X (Nom)	65 %
Life to 50% Failures (Nom)	12000 h	Chromaticity Coordinate Y (Nom)	0.432
ANSI Code HID	C130/E	Correlated Color Temperature (Nom)	0.394
		Luminous Efficacy (rated) (Nom)	3000 K
		Color Rendering Index (Nom)	79 lm/W
			81
Light Technical		Operating and Electrical	
Color Code	830 [ CCT of 3000K]	Power (Rated) (Nom)	39.1 W
Luminous Flux (Rated) (Nom)	3100 lm		
Color Designation	Warm White (WW)		

# MasterColor CDM-TC T4

Lamp Current Run-Up (Max)	0.8 A
Lamp Current (EM) (Nom)	0.53 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Ignition Peak Voltage (Min)	3500 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	96 V
Voltage (Min)	80 V
Voltage (Nom)	88 V

## Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

## Mechanical and Housing

Bulb Finish	Clear
Bulb Material	UV-Block Quartz

## Approval and Application

Energy Efficiency Label (EEL)	A
-------------------------------	---

Mercury (Hg) Content (Nom)	3.1 mg
Energy Consumption kWh/1000 h	43 kWh

## UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.3


## Luminaire Design Requirements

Bulb Temperature (Max)	500 °C
Pinch Temperature (Max)	300 °C

## Product Data

Order product name	MasterColor CDM-TC 35W/830 G8.5 T4 CL
EAN/UPC - Product	046677373726
Order code	373720
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928085205115
Net Weight (Piece)	0.010 kg
ILCOS Code	MT/UB-35/830-H-G8.5-17/85


## Dimensional drawing



CDM-TC 35W/830 G8.5



Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MasterColor CDM-TC 35W/830 G8.5 T4 CL	15 mm	0.5 in	5 mm	51 mm	53 mm	52 mm	85 mm

## Photometric data

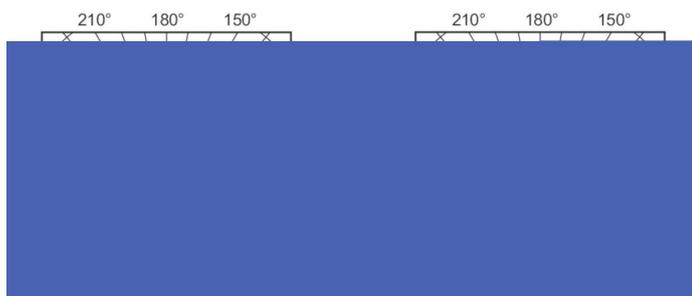

# MasterColor CDM-TC T4

## Lifetime

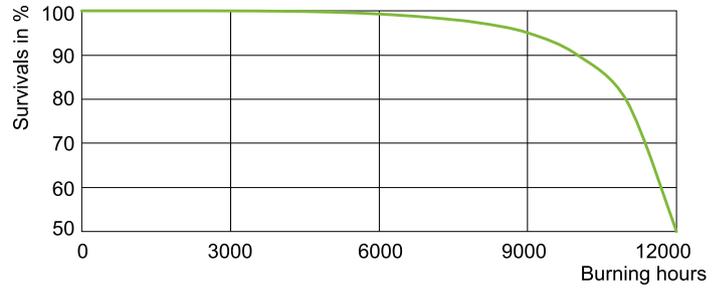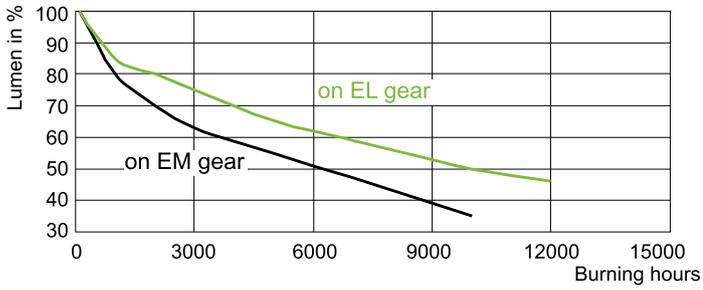

LDLM\_CDM-TC\_35W\_830-Lumen maintenance diagram

LDLE\_CDM-TC\_0001-Life expectancy diagram

