

Rittal – The System.

Faster – better – everywhere.

Second Mounting Level – DK 7297.000

Date : May 29, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Second Mounting Level – DK 7297.000

created: 29.05.2018 build on www.rittal.com/us-en

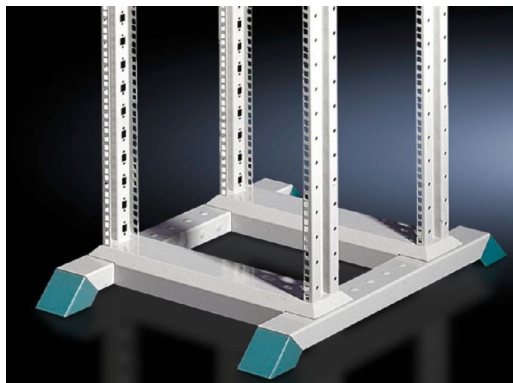

Product description

Description: To accommodate 482.6 mm (19") network components or to mount component shelves and slide rails. 482.6 mm (19") profiles holes at the front, hole center-to-center spacing 465 mm, rear 470 mm, designed for the attachment of patch panels and cable routing rails. The mounting level can be positioned in the 50 mm hole pattern. Minimum clearance between levels 150 mm, maximum clearance between levels 350 mm.

Material: Carbon steel, 2 mm

Color: Profile frame: RAL 7035
Trim Panel: RAL 5018

Supply includes: Torsionally rigid profile frame with 482.6 mm (19") holes
Mounting Accessories

Product features

Height units: 36 U

Installation dimensions: Installation width: 482,6 mm / 19"

Packaging unit: 1 pc(s).

Weight/packaging unit: 12.66 kg (27.9 lb.)

EAN: 4028177128811

Customs tariff number: 94039010

ETIM 6.0:	EC002620
ETIM 5.0:	EC002620
eCl@ss 8.0/8.1:	27189261
eCl@ss 7.0/7.1:	27182590
eCl@ss 6.0/6.1:	27182590
eCl@ss 5.1/5.1.4:	27189207
Product description (long):	DK Second pair of mounting angles, 36 U, 482.6 mm (19"), For Data Rack