



LED 104W Wall packs. 3 cutoff options. patent-pending thermal management system. 100,000 hour L70 lifespan. 5-year, no-compromise warranty.

Color: Bronze

Weight: 26.0 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

**Driver Info**

Type	Constant Current	Watts	104W
120V	0.95A	Color Temp	5000K (Cool)
208V	N/A	Color Accuracy	71 CRI
240V	N/A	L70 Lifespan	100,000 Hours
277V	N/A	Lumens	14,159
		Input Watts	107.5W
		Efficacy	131.7 lm/W

**LED Info**

Type	Constant Current	Watts	104W
120V	0.95A	Color Temp	5000K (Cool)
208V	N/A	Color Accuracy	71 CRI
240V	N/A	L70 Lifespan	100,000 Hours
277V	N/A	Lumens	14,159
		Input Watts	107.5W
		Efficacy	131.7 lm/W

## Technical Specifications

### Electrical

#### Driver:

Constant current, Class 1, 100-277V, 50/60 Hz, 4kV Surge Protection, 700mA, 100-277V = 0.95A, Power Factor 99.2%.

#### THD:

5.22% at 120V, 7.4% at 277V

#### Power Factor:

99.6% at 120V, 92.4% at 277V

#### Photocell:

120V Swivel Photocell Included. Photocell is only compatible with 120V.

### Listings

#### UL Listed:

UL Suitable for Wet Locations as Uplight and Downlight Wall Mount Only

### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. DLC Product Code: P000017B6

### Construction

#### IP Rating:

Ingress Protection rating of IP66 for dust and water

#### Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

#### Housing:

Precision die-cast aluminum housing, door frame arm and wall bracket

### Mounting:

Die-cast aluminum wall bracket with (5) 1/2" conduit openings with plugs. Two-piece bracket with tether for ease of installation and wiring.

#### Arm:

Die-cast aluminum with wiring access plate

#### Cutoff:

Standard (15°)

#### Lens:

Tempered glass

**Technical Specifications (continued)****Construction****Reflector:**

Specular vacuum metallized polycarbonate

**Gaskets:**

High-temperature silicone

**Finish:**

Formulated for high durability and long-lasting color

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

**LED Characteristics****LEDs:**

Four multi-chip, high-output, long-life LEDs

**Color Consistency:**

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

**Color Stability:**

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377.2011.

**Performance****Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**Other****Equivalency:**

Equivalent to 400W Metal Halide

**Patents:**

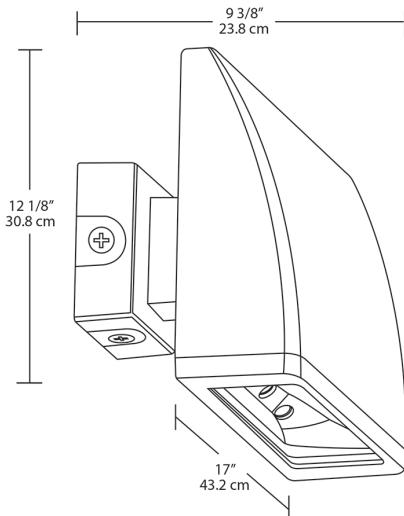
The design of the WPLED104 is protected by patents pending in US, Canada, China, Taiwan and Mexico

**Warranty:**RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Optical****BUG Rating:**

B1 U1 G3

**Dimensions****Features**

High performance LED light engine

Maintains 70% of initial lumens at 100,000-hours

Weatherproof high temperature silicone gaskets

Superior heat sinking with die cast aluminum housing and external fins

Replaces 400W MH

100 up to 277 Volts

5-Year, No-Compromise Warranty

**Ordering Matrix**

Family	Cutoff	Wattage	Color Temp	Finish	Driver Options	Options
WPLED		104				/PCS

**Blank** = Standard (15 degrees)  
**C** = Cutoff (7.5 degrees)  
**FC** = Full Cutoff (0 degrees)

**104** = 104W

**Blank** = 5000K (Cool)  
**N** = 4000K (Neutral)  
**Y** = 3000K (Warm)

**Blank** = Bronze  
**W** = White

**Blank** = No Option  
**/480** = 480V  
**/BL** = Bi-Level

**Blank** = No Option  
**/PCS** = 120V Swivel Photocell  
**/PCS2** = 277V Swivel Photocell  
**/PCS4** = 480V Swivel Photocell