



MasterColor CDM PAR38

MasterColor CDM100/PAR38/FL/4K ALTO ELITE 12PK

Philips MasterColor® Ceramic Metal Halide PAR38 Lamps offer high-efficiency, ceramic metal halide reflector lamps with a stable color over lifetime and a crisp, sparkling light.

Warnings and Safety

- R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21 CFR 1040.30 Canada: SOR/DORS/80-381)
- Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050

Product data

General Information		Luminous Intensity (Nom)	
Base	E26 [Single Contact Medium Screw]		20000 cd
Operating Position	Universal [Universal]	Beam Description	Flood [Flood]
Life to 50% Failures (Nom)	16000 h	Color Designation	Cool White (CW)
ANSI Code HID	C90/O	Chromaticity Coordinate X (Nom)	0.380
		Chromaticity Coordinate Y (Nom)	0.375
		Correlated Color Temperature (Nom)	4200 K
		Color Rendering Index (Nom)	92
Light Technical		Operating and Electrical	
Beam Angle (Max)	31°	Power (Rated) (Nom)	95.0 W
Beam Angle (Min)	19	Lamp Current (EM) (Nom)	1.10 A
Color Code	940 [CCT of 4000K]	Ignition Supply Voltage (Min)	235 V
Beam Angle (Nom)	25°		
Luminous Flux (Rated) (Nom)	6400 lm		

MasterColor CDM PAR38

Re-ignition Time (Min) (Max)	8 min
Ignition Time (Max)	10 s
Voltage (Max)	122 V
Voltage (Min)	97 V
Voltage (Nom)	102 V

Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	2 min

Mechanical and Housing

Bulb Finish	Clear
-------------	-------

Luminaire Design Requirements


Bulb Temperature (Max)	350 °C
------------------------	--------

Cap-Base Temperature (Max)	190 °C
----------------------------	--------

Product Data

Order product name	MasterColor CDM100/PAR38/FL/4K ALTO ELITE 12PK
EAN/UPC - Product	046677456535
Order code	456533
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928494230901
Net Weight (Piece)	0.307 kg

Dimensional drawing





PAR 38

CDM 100W/940 E26 PAR38 FL 25D ALTO Elite

Product	D	D	C (max)
MasterColor CDM100/PAR38/FL/4K ALTO ELITE 12PK	4.76 in	121.0 mm	134.0 mm

Lifetime

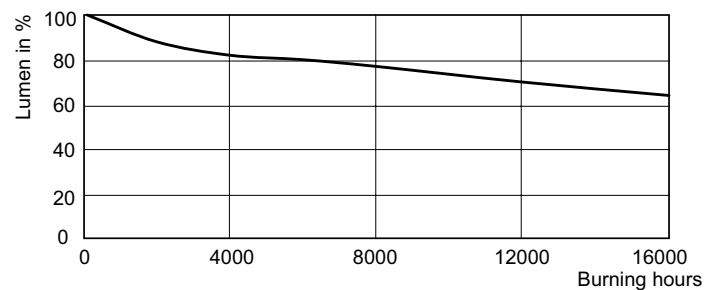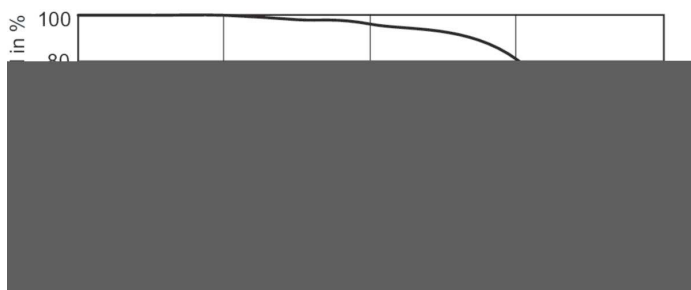

LDLM_ICDMPAR_0001-Lumen maintenance diagram

MasterColor CDM PAR38

